

**RUUD LIGHTING DIRECT**  
9201 Washington Avenue  
Racine, WI 53406-3772

CHANGE SERVICE REQUESTED

CUSTOMER NUMBER

SOURCE CODE

PRESORTED STANDARD  
US POSTAGE PAID  
BOLINGBROOK, IL  
PERMIT #1550

**MAILING LIST CORRECTIONS:**  
Fax this page marked with any  
changes, corrections, or deletions  
to (800) 236-7500, attention  
Marketing Department.

**THANK YOU!**

©2012 RUUD LIGHTING INC.  
Printed in USA | Fg# CA1/RUUD-13

Ready Whenever You Are



Product features, specification sheets, IES files – our website has  
the information you need whenever you want it.

Find what you're looking for and get on your way fast.

[ruudlightingdirect.com](http://ruudlightingdirect.com)

2013 CATALOG

2013

RUUD LIGHTING DIRECT

(800) 236-7000 • [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



**BEST  
OPTICS  
AVAILABLE**

The AeroDome®  
pages 53, 59, 63, 64

**RUUD LIGHTING®  
DIRECT**

Security • High & Low Bay • Flood & Area  
Poles & Tenons • Canopy & Parking Structure  
Exit & Emergency • Indirect • Replacement Lamps

(800) 236-7000 • M-F, 7 AM – 5 PM (CT) • [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# COLORFAST DELTAGUARD®

## Our Exclusive Finishing System



Quality products deserve a quality finish with the only 7-year warranty in the industry. Our Colorfast DeltaGuard finish limited warranty provides that the finish will be free from material cracking, peeling, excessive fading or corrosion defects under normal use and service for seven years.



### OUR 16-STEP TOTAL FINISHING SYSTEM INCLUDES:

- Meticulous cleaning that removes all surface contaminants
- Pretreatment that chemically etches the metal surface for superior paint adhesion
- Electro-deposited epoxy primer that provides unmatched corrosion resistance
- Baked-on ultra-durable topcoat that offers superior protection against UV radiation
- Computerized control and quality assurance system
- ISO 9001-2000 Quality Standard registration
- Use of environmentally safe materials throughout the finishing process

## COLORFAST DELTAGUARD TOPCOAT

The baked-on, ultra-durable powder topcoat is key to a durable and colorfast finish. The DeltaGuard process offers unmatched performance in durability and color retention and delivers:

- » Ultraviolet light resistance
- » Corrosion resistance
- » Hard surfacing
- » Chemical resistance
- » Superior adhesion
- » Excellent color retention

### DELAGUARD MAKES THE DIFFERENCE!



The same 3-mil thickness of powder was applied to each of these two pole section samples. Each was scored and exposed to a salt-fog test for 2,500 hours.

### AVAILABLE FINISHES



## ALPHABETICAL PRODUCT INDEX

PRODUCT	PAGE #	PRODUCT	PAGE #	PRODUCT	PAGE #	PRODUCT	PAGE #	PRODUCT	PAGE #
AC	56	EXDM	89	L5-15R	32	NSC	38	SE4	15
ACU	97	EXE	89	L6-15R	32	NSF	37	SE5	13
AVE	69	FS	42	L7-15R	32	NSW	39	SE7	86
AVH3	52	FWG-12	17, 68, 87	L8-20R	32	PA	78	SS	8
AVH4	58	FWG-14	66	LAC	57	PARV	77	TPS-1	17, 67, 87
AVRP	69	FWG-16	17, 68, 87	LACU	98	PB	78	U-MK	95
AVU	69	FWG-22	68, 87	LCF	45	PC	66, 67, 68	U	94
AVV3	53	FWG-9	66	LFS	43	PD	79	VFT	60
AVV4	59	FWG-L	67	LPF-12	87	PD-10BZ	87	VPR	54
AVV5	63	FWG-MW	17	LPF-16	87	PD-20BZ	87	W	41
AVVA	64	FWG-W	17	LPM	47	PGM-1	66, 67, 71	W0	5
CA-1	70	GS-12	67, 68	LPN	49	PH	32	WAC	61
CF	44	GS-14	66	LPR	51	PM	46, 71	WACU	99
CL	83	GS-16	68	LS-12	17, 68	PN	48	WG-A	33
CSF-22	68	GS-22	68	LS-16	17, 68	PR	50	WG-A/OC	33
DB-12	67, 68	GS-9	66	LS-22	68	PS	75	WG-AP	33
DB-14	66	GWC	3	LS-L	67	PSRV	77	WG-AP/OC	33
DB-16	68	GWP	4	MAC	56	PT	70, 79	WG-AR	33
DB-22	68	H	19, 20, 22	MACU	97	PW	70	WG-AR/OC	33
DB-9	66	HC	16	MAVH3	52	PWY-1	71	WM	71
DL-12	68	HCD	16	MAVH4	58	QV	62, 85	WM-GW	17
DL-16	68	HCF	16	MCF	44	RC	84	WPR	55
DL-L	67	HCL	17	MCL	83	REC	74	WWS-12	17
E1	6	HN	24, 25	MFS	42	SB-16	17, 87	WWS-16	17
E3	9	H-EB	33	MGWC	3	SBL-12	68		
E4	14	H-LK	33	MGWP	4	SBL-16	68		
E5	12	H-WG	33	MNB-1	66, 70	SBL-22	68		
E8	11	IA	26	MNB-2	66, 70	SBL-AV	69		
EFBP2-D13	17	IAP	27	MNH-2	66, 71	SBL-AVV20	69		
EM11LP	90	IAR	28	MPM	46	SBL-AVV25	69		
EM11/22	90	IC	29	MPN	48	SBL-AVVA25	69		
EM50/100	91	ICJ	31	MPR	50	SBL-L	67		
EMDE	91	ICM	30	MRC	84	SC-5	32		
EMR	91	L14-20R	32	MW	41	SC-5C	32		
ESB-7	17	L16-20R	32	MW0	5	SE1	7		
EXD	89	L37*20R	32	NS	40	SE3	10		

### THE FOLLOWING NAMES ARE REGISTERED TRADEMARKS OF RUUD LIGHTING, INC.:

AeroDome  
Aviator  
Colorfast  
DeltaGuard  
Crown-Weld  
EZ Bay  
EZ Bay Plus  
EZ Wall Pack  
Ruud  
Ruud Lighting  
Quick Ship is a trademark of Ruud Lighting.

### RUUD LIGHTING IS ISO 9001 REGISTERED



ISO 9001 is the internationally recognized standard for the quality management of businesses. It applies to the processes for the products we supply and prescribes the systematic control of activities to ensure your quality needs are met.

### ENVIRONMENTAL

Fluorescent and HID lamps contain mercury. Dispose of these lamps according to local, state or federal laws. For further information on local, state or other requirements for disposal of mercury-containing lamps, see [www.lamprecycle.org](http://www.lamprecycle.org).



(800) 236-7000 • M-F, 7 AM - 5 PM (CT) • [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



# TABLE OF CONTENTS

## SECURITY

2-17

Full Cutoff Wall Pack • Glass Refractor Wall Pack • Glass-Lensed Wall Pack • Translucent Lens Security Light • Wide Throw Security Light  
Deep Shield Security Light • Up/Down Security Light • Forward Throw Security Light • Round Bollard

## HIGH & LOW BAY

18-33

Linear Fluorescent High Bay • Slim Economy Fluorescent High Bay  
Aluminum High Bay • Prismatic High Bay • Compact, Medium and Jumbo Low Bay

## FLOOD & AREA

34-71

Economy Flood • Compact Economy Flood • Sign Uplight • Standard Floodlight • Forward Throw Floodlight • Spotlight • Narrow Spotlight  
Wide Throw Area Light • Forward Throw Area Light • Wedge Area Light • Vertical-Lamp Area Light • Aviator Area Light • AeroDome Area Light

## POLES & TENONS

72-81

Premium Straight Square Steel Poles • Round Tapered Steel & Aluminum Poles  
Square Internal Mount Tenons • Round External Mount Tenons • Pole & Fixture EPA Information

## CANOPY & PARKING STRUCTURE

82-87

Canopy Light • Recessed Canopy Light • Vertical-Lamp Parking Structure • Up/Down Parking Structure

## EXIT & EMERGENCY

88-91

Plastic LED Exit Sign • Edge Lit LED Exit Sign • Emergency Light & LED Ext Sign • Emergency Light  
Low Profile Emergency Light • Wet Listed Emergency Light • 50/100-watt Emergency Light • Remote Heads

## INDIRECT

92-99

Indirect Linear Fluorescent • HID Forward Throw Indirect Light

## REPLACEMENT LAMPS

100-103

Linear Fluorescent • Compact Fluorescent • Quartz Halogen  
Probe Start Metal Halide • Pulse Start Metal Halide • High Pressure Sodium

## WARRANTY INFORMATION

104

		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	DISTRIBUTION PATTERN	PAGE NUMBER
WALL PACK	 <b>GWC SERIES</b>	Full Cutoff Wall Pack	50W – 400W HID 57W – 70W CFL		Page 3
	 <b>GWP SERIES</b>	Glass Refractor Wall Pack	50W – 400W HID		Page 4
	 <b>WO SERIES</b>	Glass-Lensed Wall Pack	50W – 400W HID		Page 5
SOFFIT	 <b>E1 SERIES</b>	Rectangular Translucent Lens Security Light	50W – 100W HID 13W – 42W CFL 60W INC		Page 6
	 <b>SE1 SERIES</b>	Square Translucent Lens Security Light	50W – 150W HID		Page 7
	 <b>SS SERIES</b>	Shallow Square Translucent Lens Security Light	21W – 38W CFL		Page 8
WIDE THROW	 <b>E3 SERIES</b>	Rectangular Wide Throw Security Light	50W – 100W HID		Page 9
	 <b>SE3 SERIES</b>	Square Wide Throw Security Light	50W – 150W HID 26W – 57W CFL		Page 10
	 <b>E8 SERIES</b>	Rectangular Deep Shield Security Light	50W – 100W HID 13W – 42W CFL 60W INC		Page 11
UP/DOWN	 <b>E5 SERIES</b>	Rectangular Up/Down Security Light	50W HID 13W – 42W CFL 60W INC		Page 12
	 <b>SE5 SERIES</b>	Square Up/Down Security Light	50W – 150W HID 26W – 57W CFL		Page 13
FORWARD THROW	 <b>E4 SERIES</b>	Rectangular Forward Throw Security Light	50W – 70W HID 13W – 42W CFL 60W INC		Page 14
	 <b>SE4 SERIES</b>	Square Forward Throw Security Light	50W – 100W HID 26W – 57W CFL		Page 15
BOLLARD	 <b>HC SERIES</b>	Round Bollard	50W – 100W HID 26W – 42W CFL		Page 16







# GWC SERIES by RUUD LIGHTING DIRECT


## FULL CUTOFF WALL PACK

The Full Cutoff Wall Pack provides excellent cutoff illumination, ease of installation and serviceability. Designed for extreme resistance to weather or insect infiltration. The GWC Series is available through 400 watts and meets IES Full Cutoff Classification.

**APPLICATIONS:** General security lighting, full cutoff requirements

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
50W PSMH	12"	MGWC0405-M
70W PSMH	12"	MGWC0407-M
100W PSMH	12"	MGWC0410-M
150W PSMH	12"	MGWC0615-M
250W PSMH	16"	GWC0625-M
320W PSMH 	16"	GWC0632-M
400W PSMH 	16"	GWC0640-M
50W HPS	12"	MGWC0505-D
70W HPS	12"	MGWC0507-M
100W HPS	12"	MGWC0510-M
150W HPS	12"	MGWC0515-M
250W HPS	16"	GWC0525-M
400W HPS	16"	GWC0540-M
57W CFL	16"	GWC0257-U
70W CFL	16"	GWC0270-U

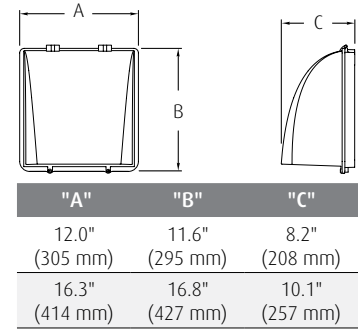

### DISTRIBUTION PATTERN



For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



 Reduced envelope lamp. ED28 for 320W and 400W PSMH.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (50-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W and 100W PSMH only)	5	
(250W-400W PSMH & 250W-400W HPS only)	5	
(70W and 100W HPS only)	5	
(150W PSMH & 150W HPS only)	5	
<b>Canada 347V Ballast</b> (50W HPS only)	6	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH and 50W-150W HPS only)	T	
(150W-400W PSMH and 250W & 400W HPS only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor or CFL) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V or 240V) (347V)	27, 1, 2, 3 or 4 6	P P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Uneven Surface Mounting Plate</b>	WM-GW
 <b>Emergency Egress Battery Pack</b> (57W CFL only, remote mounted)	EFBP2-D13

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



## GLASS REFRACTOR WALL PACK




The Glass Refractor Wall Pack is a perfect choice for general security lighting applications that call for a higher wattage, glass-lensed wall pack. It provides superior ease of installation and serviceability, is designed for extreme resistance to weather and insect infiltration and is available through 400 watts.

**APPLICATIONS:** General security lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
50W PSMH	12"	MGWP0405-M
70W PSMH	12"	MGWP0407-M
100W PSMH	12"	MGWP0410-M
150W PSMH	12"	MGWP0615-M
250W PSMH	16"	GWP0625-M
320W PSMH 	16"	GWP0632-M
400W PSMH 	16"	GWP0640-M
50W HPS	12"	MGWP0505-D
70W HPS	12"	MGWP0507-M
100W HPS	12"	MGWP0510-M
150W HPS	12"	MGWP0515-M
250W HPS	16"	GWP0525-M
400W HPS	16"	GWP0540-M

 Reduced envelope lamp. ED28 for 320W and 400W PSMH.

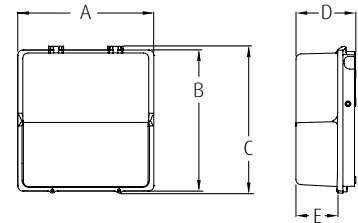

"A"	"B"	"C"
12.0" (305 mm)	11.6" (295 mm)	12.3" (312 mm)
16.3" (414 mm)	16.9" (429 mm)	17.6" (447 mm)
"D"	"E"	
5.5" (140 mm)	3.3" (84 mm)	
7.2" (182 mm)	5.0" (128 mm)	

### DISTRIBUTION PATTERN





For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (50-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W and 100W PSMH only)	5	
(250W-400W PSMH & 250W-400W HPS only)	5	
(70W and 100W HPS only)	5	
(150W PSMH & 150W HPS only)	5	
<b>Canada 347V Ballast</b> (50W HPS only)	6	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH and 50W-150W HPS only)	T	
(150W-400W PSMH and 250W & 400W HPS only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor or CFL) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V or 240V)	27, 1, 2, 3 or 4	P
(347V)	6	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Uneven Surface Mounting Plate</b>	WM-GW
 <b>Wire Guard</b> 12" Housing 16" Housing	FWG-MW FWG-W

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES





A Minimum of 150°C Supply Conductors Are Required.

### DISTRIBUTION PATTERN



For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# WO SERIES by RUUD LIGHTING DIRECT

## GLASS-LENSED WALL PACK


The Glass-Lensed Wall Pack is a perfect choice for general security lighting applications and features a clear tempered glass lens. It provides superior ease of installation and serviceability, is designed for extreme resistance to weather and insect infiltration and is available through 400 watts. **NOTE:** Suitable to embed in poured concrete (see restrictions below).

**APPLICATIONS:** General security lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
50W PSMH	12"	MW0405-M
70W PSMH	12"	MW0407-M
100W PSMH	12"	MW0410-M
150W PSMH	12"	MW0615-M
250W PSMH	16"	W0625-M
320W PSMH <sup>Ⓢ</sup>	16"	W0632-M
400W PSMH <sup>Ⓢ</sup>	16"	W0640-M
50W HPS	12"	MW0505-D
70W HPS	12"	MW0507-M
100W HPS	12"	MW0510-M
150W HPS	12"	MW0515-M
250W HPS	16"	W0525-M
400W HPS	16"	W0540-M

<sup>Ⓢ</sup> Reduced envelope lamp. ED28 for 320W & 400W PSMH.



"A"	"B"
12" Square (305 mm)	5.0" (127 mm)
16" Square (406 mm)	6.5" (165 mm)



**WALL MOUNT ONLY**  
Embedded Installation,  
option "E"



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (50-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W-150W PSMH only)	5	
(250W-400W PSMH & 250W-400W HPS only)	5	
(70W-150W HPS only)	5	
<b>Canada 347V Ballast</b> (50W HPS only)	6	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH and 50W-150W HPS only)	T	
(150W-400W PSMH and 250W & 400W HPS only)	T	
<b>Embedded</b> (up to 100W in 12" housing, up to 250W in 16" housing)		E
<b>Single Fuse</b> <sup>†</sup> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> <sup>†</sup> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> <sup>†</sup> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> <sup>†</sup> (277V Reactor, 120V, 277V, 208V or 240V) (347V)	27, 1, 2, 3 or 4 6	P P
<b>External Photocell</b> <sup>†</sup> (480V)	5	P
<b>Tamperproof Lens Fasteners</b>		J

<sup>†</sup> Not available with "E" option

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Wire Guard</b> 12" Housing 16" Housing	FWG-12 FWG-16
 <b>Polycarbonate Vandal Shield</b> 12" Housing 16" Housing	LS-12 LS-16
 <b>Surface Mounting Box</b> <sup>▲</sup> 12" and 16" Housing	SB-16
 <b>Wall Wash/Glare Shield</b> 12" Housing 16" Housing	WWS-12 WWS-16
 <b>Tamperproof Screwdriver</b>	TPS-1

<sup>▲</sup>For 12" 150W & 16" 320W-400W fixtures, SB-16 is required when mounting to combustible surface

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# E1 SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR TRANSLUCENT LENS SECURITY LIGHT

The white polycarbonate lens diffuses glare and provides uniform light levels in all directions.  
**NOTE:** The 50-watt MH and 70-watt HPS fixtures with suffix "G" are supplied with a glass insert to allow operation in the wall-mounted position.

**APPLICATIONS:** Corridors, entryways and soffits

### 'B' HOUSING DIMENSION




For 50W HPS dual-volt, 70W & 100W HPS with quad-volt or tri-volt, 50W HPS 347V, and all PSMH fixtures, the housing depth is 3" (76 mm), and the overall fixture depth is 7.2" (183 mm).

### HID or CFL LAMP INCLUDED

LAMP WATTAGE	HOUSING DIMENSION	MOUNTING POSITION	CATALOG NUMBER
50W PSMH <sup>▲</sup>	B	Ceiling/Soffit	E1405-M
	B	Wall	E1405-MG
70W PSMH	B	Ceiling/Soffit	E1407-M
50W HPS	B	Any	E1505-1
70W HPS <sup>▲</sup>	B	Ceiling/Soffit	E1507-1
	B	Wall	E1507-1G
100W HPS	B	Ceiling/Soffit	E1510-1
13W CFL	A	Any	E1213-UL
26/32/42W CFL <sup>▼</sup>	B	Any	E1242-UL
60W Incandescent <sup>*</sup>	A	Any	E1106-1


- <sup>▲</sup> Fixtures with suffix "G" are supplied with a glass insert to allow operation in the wall-mounted position.
- <sup>▼</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.
- <sup>\*</sup> Incandescent lamp **NOT** included. 60-watt maximum.

### DISTRIBUTION PATTERN

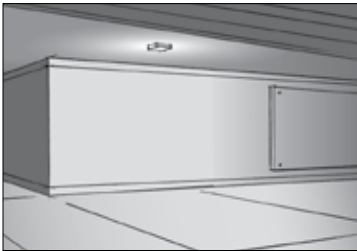

For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




### 'A' HOUSING DIMENSION



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>Quad-volt Ballast</b> (120/208/240/277V) (70W and 100W HPS only)	M		
<b>Canada 347V Ballast</b> (50W HPS only) (26/32/42W CFL only)	6 6L		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W & 70W PSMH only) (70W & 100W HPS only)	T T		
<b>High Power Factor Ballast</b> (HID only, standard on CFL)		H	
<b>Button Photocell</b> (P=HID only, LP=CFL only) (For 13W CFL & 60W Incandescent, use ESB-7(a)P) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Surface Mounting Box</b>	ESB-7
 <b>Surface Mounting Box with Photocell</b> Specify Voltage (a) 1=120V, 2=277V	ESB-7(a)P
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)





# SE1 SERIES by RUUD LIGHTING DIRECT


## SQUARE TRANSLUCENT LENS SECURITY LIGHT

The white polycarbonate lens diffuses glare and provides uniform light levels in all directions.

**APPLICATIONS:** Corridors, entryways and soffits


### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	8"	Ceiling/Soffit/Wall	SE1405-M
70W PSMH	8"	Ceiling/Soffit/Wall	SE1407-M
100W PSMH	12"	Ceiling/Soffit/Wall	SE1410-M
150W PSMH	12"	Ceiling/Soffit	SE1615-M
50W HPS	8"	Any	SE1505-1
70W HPS	8"	Ceiling/Soffit/Wall	SE1507-1
100W HPS	12"	Ceiling/Soffit/Wall	SE1510-M
150W HPS	12"	Ceiling/Soffit/Wall	SE1515-M




"A"	"B"
8" Square (203 mm)	4.1" (104 mm)
12" Square (305 mm)	5.0" (127 mm)

### DISTRIBUTION PATTERN

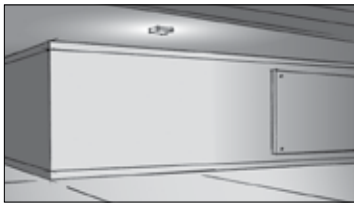

For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



Quick Mount, option "B"  
10.18"L x 5.75"W x 1.56"D




for Wet Locations Quick Mount (option B) is listed for Damp Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (100-150W HPS, 12" housing only)	1		
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>Quad Volt Ballast</b> (120/208/240/277V) (70W HPS only)	M		
<b>Canada 347V Ballast</b> (50W HPS only)	6		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH, 100W & 150W HPS only) (150W PSMH only) (70W HPS only)	T T T		
<b>High Power Factor Ballast</b> (standard on 12") (For 8" housing only except 50W PSMH, 50W HPS with 347V & 70W HPS with tri-volt ballast)		H	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V or 240V) (n/a Canada)	3 or 4	F	
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V or 240V) (347V)	27, 1, 2, 3 or 4 6	P P	
<b>Quick Mount</b> <sup>▲</sup> (12" housing only)		B	
<b>Tamperproof Lens Fasteners</b>		J	
<b>Quartz Standby</b> (n/a 277V reactor) (includes 100W Q lamp) (8" has non-delay-relay, 12" has delay-relay) (not available with Fuse option in 8" housing)		Q	

<sup>▲</sup> UL listed for damp locations

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THIS ACCESSORY




# SS SERIES by **RUUD LIGHTING DIRECT**

## SHALLOW SQUARE TRANSLUCENT SECURITY LIGHT

SS Series fixtures feature a low profile (minimal depth to the product) polycarbonate lens. The internal reflector is finished with a diffuse white powder coat and provides high fixture efficacy. The translucent lens provides uniform illumination so fixtures can be used in horizontal or vertical mountings in a wide variety of applications. Meets Americans with Disability Act Accessibility Guidelines (ADAAG) with a depth less than four inches.

**APPLICATIONS:** Corridors, entryways and soffits




"A"	"B"	"C"
8" Square (203 mm)	1.6" (41 mm)	1.4" (36 mm)
10" Square (254 mm)	1.9" (48 mm)	2.0" (51 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
21W Fluorescent	8"	Ceiling/Soffit/Wall	SS0221-1LW
28W Fluorescent	10"	Ceiling/Soffit/Wall	SS0228-ULW
38W Fluorescent	10"	Ceiling/Soffit/Wall	SS0238-ULW

### DISTRIBUTION PATTERN

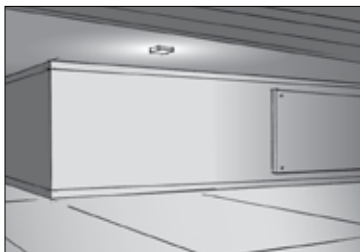

For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




for Wet Locations Emergency Ballast options are Damp Listed

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
277V Ballast (21W only)	2		
120V Emergency Ballast* (28W & 38W only)	1EML		
277V Emergency Ballast* (38W only)	2EML		
Button Photocell (120V or 277V)	1LPW or 2LPW		
Fuse		F	
Tamperproof Lens Fasteners		J	

\* UL listed for damp locations. cUL listed for dry locations.

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 Tamperproof Screwdriver	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THIS ACCESSORY






# E3 SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR WIDE THROW SECURITY LIGHT

The reflector and polycarbonate lens direct light downward to wash the wall below and to the sides of the fixture. The wide distribution permits maximum spacing between fixtures. E3 Series optics are also available for vertical mounting.

**APPLICATIONS:** Accent lighting, general security lighting

### 'B' HOUSING DIMENSION



For 50W dual-volt, 70W & 100W HPS with quad-volt or tri-volt, 50W HPS 347V, and all PSMH fixtures, the housing depth is 3" (76 mm), and the overall fixture depth is 7.2" (183 mm).

### LAMP INCLUDED

LAMP WATTAGE	HOUSING DIMENSION	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	B	Wall Downlight	E3405-M
70W PSMH	B	Wall Downlight	E3407-M
50W HPS	B	Any	E3505-1
70W HPS	B	Wall Downlight	E3507-1
100W HPS	B	Wall Downlight	E3510-1

### DISTRIBUTION PATTERN



For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)





Vertical Mounting, option "R"



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>Quad-volt Ballast</b> (120/208/240/277V) (70W and 100W HPS only)	M		
<b>Canada 347V Ballast</b> (50W HPS only)	6		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W & 70W PSMH only) (70W & 100W HPS only)	T		
<b>High Power Factor Ballast</b>		H	
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V or 240V) (347V)	27, 1, 2, 3 or 4	P	
	6	P	
<b>Bronze Color Shroud</b>		BS	
<b>Gold Color Shroud</b> (n/a 100W HPS)		GS	
<b>Tamperproof Lens Fasteners</b>		J	
<b>Vertical Mounting</b> (n/a with High Power Factor Ballast and Photocell in same fixture)		R	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Surface Mounting Box</b>	ESB-7
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# SE3 SERIES by RUUD LIGHTING DIRECT

## SQUARE WIDE THROW SECURITY LIGHT

The reflector directs light downward to wash the wall below and to the sides of the fixture. The polycarbonate lens and extra-wide cutoff distribution provides glare control and permits maximum spacing between fixtures (recommended spacing is four times mounting height).

**APPLICATIONS:** Accent lighting, general security lighting



"A"	"B"
8" Square (203 mm)	4.1" (104 mm)
12" Square (305 mm)	5.0" (127 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	8"	Wall Downlight	SE3405-M
70W PSMH	8"	Wall Downlight	SE3407-M
100W PSMH	12"	Wall Downlight	SE3410-M
150W PSMH	12"	Wall Downlight	SE3615-M
50W HPS	8"	Any	SE3505-1
70W HPS	8"	Wall Downlight	SE3507-1
100W HPS	12"	Wall Downlight	SE3510-M
150W HPS	12"	Wall Downlight	SE3515-M
26/32/42W CFL <sup>▲</sup>	12"	Any	SE3242-UL
57W CFL	12"	Any	SE3257-UL

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.

### DISTRIBUTION PATTERN




For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (100-150W HPS, 12" housing only)	1	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D	
<b>277V Reactor Ballast</b> (150W PSMH only)	27	
<b>Quad Volt Ballast</b> (120/208/240/277V) (70W HPS only)	M	
<b>Canada 347V Ballast</b> (50W HPS only)	6	
<b>Canada 347V Electronic Ballast</b> (CFL only)	6L	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH, 100W & 150W HPS only) (150W PSMH only) (70W HPS only)	T T T	
<b>High Power Factor Ballast</b> (standard on 12") (For 8" housing only except 50W PSMH, 50W HPS with 347V & 70W HPS with tri-volt ballast)		H
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V) (F=HID only, LF=CFL only)	27, 1, 2 or 6	F or LF
<b>Dual Fuse</b> (208V or 240V) (n/a Canada) (F=HID only, LF=CFL only)	3 or 4	F or LF
<b>Button Photocell</b> (P=HID only, LP=CFL only) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP
<b>Tamperproof Lens Fasteners</b>		J
<b>Quartz Standby</b> (n/a 277V reactor or CFL) (includes 100W Q lamp) (8" has non-delay-relay, 12" has delay-relay) (not available with Fuse option in 8" housing)		Q

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THIS ACCESSORY

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# E8 SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR DEEP SHIELD SECURITY LIGHT

The E8 features a polycarbonate lens and provides front brightness shielding without sacrificing wide light distribution.

**APPLICATIONS:** Accent lighting, over entrances and general security lighting

### 'B' HOUSING DIMENSION



For 50W dual-volt, 70W & 100W HPS with quad-volt or tri-volt, 50W HPS 347V, and all PSMH fixtures, the housing depth is 3" (76 mm), and the overall fixture depth is 7.2" (183 mm).

### DISTRIBUTION PATTERN




For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

### 'A' HOUSING DIMENSION



Shown with Bronze Color Shroud, option "BS"



### HID or CFL LAMP INCLUDED

LAMP WATTAGE	HOUSING DIMENSION	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	B	Wall Downlight	E8405-M
70W PSMH	B	Wall Downlight	E8407-M
50W HPS	B	Any	E8505-1
70W HPS	B	Wall Downlight	E8507-1
100W HPS	B	Wall Downlight	E8510-1
13W CFL	A	Any	E8213-UL
26/32/42W CFL <sup>▲</sup>	B	Any	E8242-UL
60W Incandescent <sup>▼</sup>	A	Any	E8106-1

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.




<sup>▼</sup> Incandescent lamp **NOT** included. 60-watt maximum.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D	
<b>Quad-volt Ballast</b> (120/208/240/277V) (70W and 100W HPS only)	M	
<b>Canada 347V Ballast</b> (50W HPS only) (26/32/42W CFL only)	6 6L	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W & 70W PSMH only) (70W & 100W HPS only)	T T	
<b>High Power Factor Ballast</b> (HID only, standard on CFL)		H
<b>Button Photocell</b> (P=HID only, LP=CFL only) (For 13W CFL & 60W Incandescent, use ESB-7(a)P) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP
<b>Bronze Color Shroud</b>		BS
<b>Gold Color Shroud</b> (n/a 100W HPS)		GS
<b>Tamperproof Lens Fasteners</b>		J

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Surface Mounting Box</b>	ESB-7
 <b>Surface Mounting Box with Photocell</b> Specify Voltage (a) 1=120V, 2=277V	ESB-7(a)P
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# E5 SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR UP/DOWN SECURITY LIGHT

The polycarbonate lens and optics provide controlled uplight and downlight with side cutoff. E5 Series optics are also available for vertical mounting.

**APPLICATIONS:** Architectural accent lighting

### 'B' HOUSING DIMENSION



For 50W dual-volt, 70W & 100W HPS with quad-volt or tri-volt, 50W HPS 347V, and all PSMH fixtures, the housing depth is 3" (76 mm), and the overall fixture depth is 7.2" (183 mm).

### HID or CFL LAMP INCLUDED

LAMP WATTAGE	HOUSING DIMENSION	MOUNTING POSITION	CATALOG NUMBER
50W PSMH <sup>▲</sup>	B	Wall	E5405-MG
50W HPS	B	Any	E5505-1
13W CFL	A	Any	E5213-UL
26/32/42W CFL <sup>▼</sup>	B	Any	E5242-UL
60W Incandescent <sup>*</sup>	A	Any	E5106-1

- <sup>▲</sup> Supplied with a glass insert to allow operation in the wall-mounted position.
- <sup>▼</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.
- <sup>\*</sup> Incandescent lamp **NOT** included. 60-watt maximum.

### DISTRIBUTION PATTERN





For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

### 'A' HOUSING DIMENSION



Shown with Gold Color Shroud, option "GS"






Vertical Mounting and Gold Shroud options "R" and "GS"



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>Canada 347V Ballast</b> (50W HPS only) (26/32/42W CFL only)	6 6L		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W PSMH only)	T		
<b>High Power Factor Ballast</b> (HID only, standard on CFL)		H	
<b>Button Photocell</b> (P=HID only, LP=CFL only) (For 13W CFL & 60W Incandescent, use ESB-7(a)P) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP	
<b>Bronze Color Shroud</b>		BS	
<b>Gold Color Shroud</b>		GS	
<b>Tamperproof Lens Fasteners</b>		J	
<b>Vertical Mounting</b> (When using in HID, not available when both HPF and Photocell supplied)		R	


## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Surface Mounting Box</b>	ESB-7
 <b>Surface Mounting Box with Photocell</b> Specify Voltage (a) 1=120V, 2=277V	ESB-7(a)P
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)






# SE5 SERIES by RUUD LIGHTING DIRECT

## SQUARE UP/DOWN SECURITY LIGHT

The polycarbonate lens and optics within the SE5 Series provide good lateral distribution and aesthetically appealing wall brightness.

**APPLICATIONS:** Architectural accent lighting



"A"	"B"
8" Square (203 mm)	4.1" (104 mm)
12" Square (305 mm)	5.0" (127 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	8"	Wall	SE5405-M
70W PSMH	8"	Wall	SE5407-M
100W PSMH	12"	Wall	SE5410-M
150W PSMH	12"	Wall	SE5615-M
50W HPS	8"	Wall	SE5505-1
70W HPS	8"	Wall	SE5507-1
100W HPS	12"	Wall	SE5510-M
150W HPS	12"	Wall	SE5515-M
26/32/42W CFL <sup>▲</sup>	12"	Any	SE5242-UL
57W CFL	12"	Any	SE5257-UL

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.

### DISTRIBUTION PATTERN




For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (100W-150W HPS, 12" housing only)	1		
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>Quad Volt Ballast</b> (120/208/240/277V) (70W HPS only)	M		
<b>Canada 347V Ballast</b> (50W HPS only)	6		
<b>Canada 347V Electronic Ballast</b> (CFL only)	6L		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W-100W PSMH, 100W & 150W HPS only) (150W PSMH only) (70W HPS only)	T T T		
<b>High Power Factor Ballast</b> (standard on 12") (For 8" housing only except 50W PSMH, 50W HPS with 347V & 70W HPS with tri-volt ballast)		H	
<b>Single Fuse</b> (F=HID only, LF=CFL only) (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F or LF	
<b>Dual Fuse</b> (F=HID only, LF=CFL only) (208V or 240V) (n/a Canada)	3 or 4	F or LF	
<b>Button Photocell</b> (P=HID only, LP=CFL only) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP	
<b>Tamperproof Lens Fasteners</b>		J	
<b>Quartz Standby</b> (n/a 277V reactor or CFL) (includes 100W Q lamp) (8" has non-delay-relay, 12" has delay-relay) (not available with Fuse option in 8" housing)			Q

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THIS ACCESSORY




# E4 SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR FORWARD THROW SECURITY LIGHT

The reflector and polycarbonate lens project light out and away from the fixture.

**APPLICATIONS:** Accent lighting, general security lighting

### 'B' HOUSING DIMENSION



For 50W dual-volt, 70W & 100W HPS with quad-volt or tri-volt, 50W HPS 347V, and all PSMH fixtures, the housing depth is 3" (76 mm), and the overall fixture depth is 7.2" (183 mm).

### HID or CFL LAMP INCLUDED

LAMP WATTAGE	HOUSING DIMENSION	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	B	Wall Downlight	E4405-M
70W PSMH	B	Wall Downlight	E4407-M
50W HPS	B	Any	E4505-1
70W HPS	B	Wall Downlight	E4507-1
13W CFL	A	Any	E4213-UL
26/32/42W CFL <sup>▲</sup>	B	Any	E4242-UL
60W Incandescent <sup>▼</sup>	A	Any	E4106-1

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.


<sup>▼</sup> Incandescent lamp **NOT** included. 60-watt maximum.

### DISTRIBUTION PATTERN



For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




### 'A' HOUSING DIMENSION



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D		
<b>Quad-volt Ballast</b> (120/208/240/277V) (70W HPS only)	M		
<b>Canada 347V Ballast</b> (50W HPS only)	6		
(26/32/42W CFL only)	6L		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (50W & 70W PSMH only)	T		
(70W HPS only)	T		
<b>High Power Factor Ballast</b> (HID only, standard on CFL)		H	
<b>Button Photocell</b> (P=HID only, LP=CFL only) (For 13W CFL & 60W Incandescent, use ESB-7(a)P) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP	
<b>Bronze Color Shroud</b>		BS	
<b>Gold Color Shroud</b>		GS	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Surface Mounting Box</b>	ESB-7
 <b>Surface Mounting Box with Photocell</b> Specify Voltage (a) 1=120V, 2=277V	ESB-7(a)P
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



# SE4 SERIES by RUUD LIGHTING DIRECT

## SQUARE FORWARD THROW SECURITY LIGHT


The reflector and polycarbonate lens project light out and away from the fixture.

**APPLICATIONS:** Accent lighting, general security lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
50W PSMH	8"	Wall Downlight	SE4405-M
70W PSMH	12"	Wall Downlight	SE4407-M
100W PSMH	12"	Wall Downlight	SE4410-M
50W HPS	8"	Any	SE4505-1
70W HPS	12"	Wall Downlight	SE4507-M
100W HPS	12"	Wall Downlight	SE4510-M
26/32/42W CFL <sup>▲</sup>	12"	Any	SE4242-UL
57W CFL	12"	Any	SE4257-UL

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.



"A"	"B"
8" Square (203 mm)	4.1" (104 mm)
12" Square (305 mm)	5.0" (127 mm)

### DISTRIBUTION PATTERN




For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W & 100W HPS only)	1	
<b>Dual-volt Ballast</b> (120/277V)(50W HPS only)	D	
<b>Canada 347V Ballast</b> (50W HPS only)	6	
<b>Canada 347V Electronic Ballast</b> (CFL only)	6L	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (PSMH & 70W-100W HPS only)	T	
<b>High Power Factor Ballast</b> (standard on 12") (For 8" housing only except 50W PSMH, 50W HPS with 347V)		H
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V) (F=HID only, LF=CFL only)	27, 1, 2 or 6	F or LF
<b>Dual Fuse</b> (208V or 240V) (n/a Canada) (F=HID only, LF=CFL only)	3 or 4	F or LF
<b>Button Photocell</b> (P=HID only, LP=CFL only) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP
<b>Tamperproof Lens Fasteners</b>		J
<b>Quartz Standby</b> (n/a 277V reactor or CFL) (includes 100W Q lamp) (8" has non-delay-relay, 12" has delay-relay) (not available with Fuse option in 8" housing)		Q

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 17 FOR MORE INFORMATION ABOUT THIS ACCESSORY

## ROUND BOLLARD


The exclusive optical system of the clear lens HC Series has a 70° main beam, which provides uniform distribution with low brightness at spacings up to 40 feet.

**APPLICATIONS:** Walkways, landscaped grounds

### LAMP INCLUDED

LAMP WATTAGE	ROUND BOLLARD	DOMED TOP	EXTENDED FLAT TOP
50W PSMH	HC405-M	HCD405-M	HCF405-M
70W PSMH	HC407-M	HCD407-M	HCF407-M
100W PSMH	HC410-M	HCD410-M	HCF410-M
50W HPS	HC505-D	HCD505-D	HCF505-D
70W HPS	HC507-M	HCD507-M	HCF507-M
100W HPS	HC510-M	HCD510-M	HCF510-M
26/32/42W CFL <sup>▲</sup>	HC242-UL	HCD242-UL	HCF242-UL

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage labeling is needed to meet state and/or local regulations where applicable.

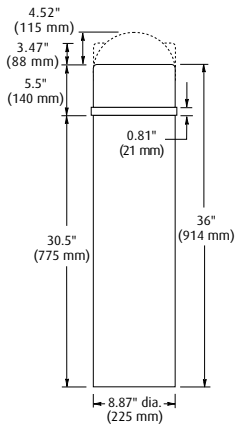

### DISTRIBUTION PATTERN



For more detailed photometric information, please see this fixture's spec sheet available online at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



HC—Standard Top



HCD—Dome Top



HCF—Extended Flat Top





180° Shielded Clear Lens, option "A"



### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
Canada 347V Ballast (50W HPS only)	6		
Canada Tri-volt Ballast (120/277/347V) (PSMH & 70W-100W HPS only)	T		
Single Fuse (120V, 277V, or 347V)	1, 2 or 6	F	
Dual Fuse (208V or 240V) (n/a Canada)	3 or 4	F	
Button Photocell (P=HID only, LP=CFL only) (120V, 277V, 208V or 240V) (347V)	1, 2, 3 or 4 6	P or LP P or LP	
180° Shielded Clear Lens		A	
Tamperproof Lens Fasteners		J	
Polycarbonate Lens (HC Series only, standard on HCD & HCF)		V	

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
 Internal Louver	HCL	
 Tamperproof Screwdriver	TPS-1	

SEE PAGE 17 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## E SERIES – SURFACE BOX



For use on all ceiling or wall mounted Rectangular Security lights, where surface wiring is required. It is die-cast aluminum, and is standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat. Five tapped and plugged knockouts are available to feed 1/2" conduit. Measures 10" x 6" x 1.25".

### CATALOG #

ESB-7

## SURFACE BOX WITH PHOTOCELL



Same as ESB-7 Surface Box but includes installed photocell. Specify voltage when ordering.

### CATALOG #

ESB-7(a)P

1=120V, 2=277V

## TAMPERPROOF SCREWDRIVER




For use with the E, HC, SE, SS and W0 Series fixtures with Tamperproof Lens Fasteners.

### CATALOG #

TPS-1

## INTERNAL LOUVER – BOLLARD



The internal louver fits within the HC Series Round Bollard and can be used in areas where sharp cutoff is desired such as walkways or entryways. The louver is die-cast aluminum and features our exclusive DeltaGuard® finish using a black e-coat epoxy primer with ultra-durable powder topcoat. Measures 8.386" diameter x 4.75" tall.

### CATALOG #

HCL

## W0 SERIES – WIRE GUARD



For W0 Series fixtures. Steel guard provides protection to optical system of any outdoor or square commercial fixture with 12" or 16" housing. Attaches easily to lens frame with supplied #8 fasteners. Finished with an acrylic black E-coat paint. 1" (25 mm) space between wires.

### CATALOG # HOUSING

FWG-12	12"
FWG-16	16"

## POLYCARBONATE VANDAL SHIELD



For W0 Series fixtures. Clear polycarbonate shield 0.118" (3 mm) thick provides protection to optical system of any size floodlight or commercial fixture. Attaches easily to lens frame with supplied #8 fasteners.

### CAT. # HOUSING DEPTH

LS-12	12"	2"
LS-16	16"	2.5"

## W0 SERIES – SURFACE BOX



For W0 Series fixtures. This die-cast aluminum box has five threaded and closed 1/2" conduit entries for surface wiring. Supplied with our Colorfast DeltaGuard® finish with a black ultra-durable powder topcoat. Four #8-32 threaded stud and hex nuts included for ease of installation. Measures 11.3"L x 8"W x 1.3"H (286 x 203 x 32 mm). **NOTE:** For 12" 150W & 16" 320W-400W fixtures, SB-16 is required when mounting to combustible surface.

### CATALOG #

SB-16

## WALL WASH / GLARE SHIELD



The diffuse aluminum shield is designed for use with W0 Series fixtures. It redirects light downward to wash the wall below and to the sides of the fixture. #8 fasteners are supplied for easy attachment of the shield to the lens frame. Exterior is finished with an acrylic black paint.

### CAT. # HOUSING DEPTH

WWS-12	12"	2.07"
WWS-16	16"	2.75"

## GWP SERIES – WIRE GUARD



For MGWP and GWP Series. Steel guard provides protection to optical system. Attaches easily around lens frame with supplied #8 stainless steel screws. A black acrylic E-coat finish is standard.

### CATALOG # HOUSING

FWG-MW	12"
FWG-W	16"

## UNEVEN SURFACE MOUNTING PLATE




For MGWC, GWC, MGWP and GWP Series. Use to prevent water entry into the fixture through the back box due to uneven gasket sealing. Measures 9.69"L x 7.31"H. Edges have a 0.172" flange. **NOTE:** An uneven surface is any irregular surface including but not limited to: brick, stucco, corrugated (ribbed) metal, and architectural soffits less than 7" wide.

### CATALOG #

WM-GW

## EMERGENCY EGRESS REMOTE-MOUNTED BATTERY PACK

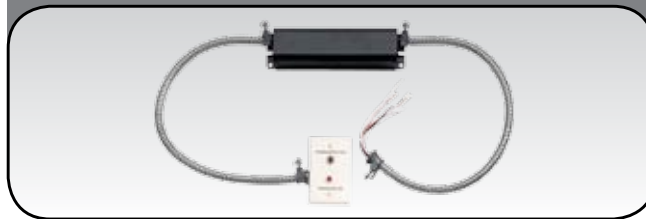

For GWC Series fixtures with a 57-watt CFL lamp.

### CATALOG #

EFBP2-D13



# HIGH & LOW BAY

		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	TYPICAL MOUNTING HEIGHT	PAGE NUMBER
STANDARD		<b>H SERIES 2-LAMP</b> 2-lamp Linear Fluorescent High Bay	32W T8 54W T5HO	10'-18' ▲	Page 19
		<b>H SERIES 4-LAMP</b> 4-lamp Linear Fluorescent High Bay	32W T8 54W T5HO	10'-30' ▲	Pages 20-21
		<b>H SERIES 6-LAMP</b> 6-lamp Linear Fluorescent High Bay	32W T8 54W T5HO	12'-40' ▲	Pages 22-23
ECONOMY		<b>HN SERIES 6-LAMP</b> 6-lamp Slim Economy Fluorescent High Bay	32W T8 54W T5HO	25'-40'+ ▲	Page 24
		<b>HN SERIES 8-LAMP</b> 8-lamp Slim Economy Fluorescent High Bay	32W T8 54W T5HO	25'-40'+ ▲	Page 25
HIGH BAY		<b>IA SERIES</b> 16" Aluminum High Bay	150W - 1000W HID	15'-30' +	Page 26
		<b>IAP SERIES</b> 16" Prismatic High Bay	150W - 400W HID	12'-20'	Page 27
		<b>IAR SERIES</b> 22" Prismatic High Bay (25" for 750W & 1000W)	250W - 1000W HID	12'-30' +	Page 28
LOW BAY		<b>IC SERIES</b> 16" Compact Low Bay	150W - 400W HID	14'-25'	Page 29
		<b>ICM SERIES</b> 22" Medium Low Bay	150W - 400W HID	12'-25'	Page 30
		<b>ICJ SERIES</b> 28" Jumbo Low Bay	150W - 400W HID	10'-20'	Page 31

▲ Use white or prismatic reflectors if fixture brightness or glare is a concern.




# H SERIES by RUUD LIGHTING DIRECT

## 2-LAMP LINEAR FLUORESCENT HIGH BAY

Fixtures feature a die-formed galvanized steel housing. T5HO fixture is supplied with programmed-start electronic ballast. T8 fixture is supplied with a high-ballast-factor, instant-start electronic ballast. Available reflectors include super specular aluminum (95% reflectance) or clear acrylic prismatic. Premium lamp option includes long life, higher lumen lamps. Meets 2008 NEC Article 410.130(G) and CEC ballast disconnect requirements. **NOTE:** Mount fixtures a minimum distance of 7.5" below ceiling. Prismatic reflectors not for use in gymnasiums or machine shops.

**ALL FIXTURES COME WITH TWO WIRE-FORM HANGERS FOR MOUNTING**

### DIMENSIONS



**A**=6.0" (152 mm), **B**=3.5" (89 mm),  
**C**=49.3" (125 cm), **D**=Minimum distance  
 between hangers is 39.4" (100 cm)  
 Fixture is 12.5" (317.5 mm) wide.




**APPLICATIONS:** Warehouse, industrial, commercial, retail projects. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

### LAMPS INCLUDED

LAMP WATTAGE	HARD WIRE	WITH 6' CORD & PLUG
● (2) 32W T8	H1A2X32-U <b>(b)</b>	H2A2X32- <b>(a)(b)</b>
● (2) 32W T8	H1F2X32-U <b>(b)</b>	H2F2X32- <b>(a)(b)</b>
● (2) 54W T5HO	H1A2X54-U <b>(b)</b>	H2A2X54- <b>(a)(b)</b>
● (2) 54W T5HO	H1F2X54-U <b>(b)</b>	H2F2X54- <b>(a)(b)</b>

### OPTICAL CONFIGURATIONS



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HARD WIRE</b>		
480V (T5HO only)	5	
Canada 347V	6	
<b>BALLAST CHOICES WITH 6' CORD &amp; PLUG (a)</b>		
120V	1	
277V	2	
208V	3	
240V	4	
480V (T5HO only)	5	
Canada 347V	6	
● 2-Level Integrated Motion Sensor T5HO (120-277V, 347V, 480V) T8 (120-277V) (uses program start ballast)		K
Housing for use with Plug-N-Go Emergency Ballast <sup>▲</sup> (120 or 277V only)	1 or 2	EB
High Reflectance White Reflector (A optical configuration only)		W
Lamp Color Temperature <b>(b)</b>		
3500K		3
4100K		4
5000K		5
Premium XL/SPX T8 Lamps by GE <sup>®</sup> (Replace "X" with "P". Example: H1A2 <b>X</b> 32-U4 becomes H1A2 <b>P</b> 32-U4)		

<sup>▲</sup> Order emergency ballast from **FIELD-INSTALLED ACCESSORIES**

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
● <b>Locking-type Receptacle</b> (120V)	L5-15R
<b>Locking-type Receptacle</b> (120V, 4-wire EB option)	L14-20R
<b>Locking-type Receptacle</b> (208V or 240V)	L6-15R
<b>Locking-type Receptacle</b> (277V)	L7-15R
<b>Locking-type Receptacle</b> (277V, 4-wire EB option)	L16-20R
<b>Locking-type Receptacle</b> (Canada 347V)	L37-20R
<b>Locking-type Receptacle</b> (480V) <i>(available with fixture purchase only)</i>	L8-20R
● <b>5-foot Safety Cable</b> (Order 2 if using to mount fixture)	SC-5
● <b>Wire Guard</b> (Grid pattern of wires is 2" x 2.5")	H-WG2
● <b>Plug-N-Go Emergency Ballast<sup>▼</sup></b> T8: 800 Lumens (120- or 277V) T8: 1350 Lumens (120- or 277V) T8: 3000 Lumens (120- or 277V) <i>Consult factory for T5HO lumen data</i>	H-EB800D H-EB1400D H-EB3000D

<sup>▼</sup> Fixture must be ordered with option "EB" from **FACTORY-INSTALLED OPTIONS**

**SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**



## 4-LAMP LINEAR FLUORESCENT HIGH BAY


Fixtures feature a die-formed galvanized steel housing. T5HO fixture is supplied with programmed-start electronic ballast. T8 fixture is supplied with a high-ballast-factor, instant-start electronic ballast. Available reflectors include super specular aluminum (95% reflectance) or clear acrylic prismatic. Premium lamp option includes long life, higher lumen lamps. Meets 2008 NEC Article 410.130(G) and CEC ballast disconnect requirements. **NOTE:** Mount fixtures a minimum distance of 7.5" below ceiling. Prismatic reflectors not for use in gymnasiums or machine shops.

ALL FIXTURES COME WITH TWO WIRE-FORM HANGERS FOR MOUNTING




**APPLICATIONS:** Warehouse, industrial, commercial, retail projects. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

### DIMENSIONS




**A**=6.0" (152 mm), **B**=3.5" (89 mm),  
**C**=49.3" (125 cm), **D**=Minimum distance between hangers is 39.4" (100 cm).  
 Fixture is 21.0" (533 mm) wide with 4.3" (108 mm) spacing between lamps.


### OPTICAL CONFIGURATIONS

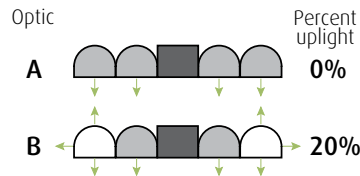

## 2-LEVEL INTEGRATED SENSOR

Studies have shown the average warehouse aisle is occupied less than 20% of the time. Our optional 2-level control turns off two, four or all lamps within the fixture, **reducing total energy usage by up to 85%**.

Our 2-level control uses an integrated 360° motion sensor that is integrated directly into the fixture. The sensor uses an external two-position switch and adjustable time delay (from 30 seconds to 20 minutes). Two lamp and 347-volt fixtures are pre-wired for "all on/all off" operation. A dual-switching option allows for hard-wired individual ballast switching. Automatic switching, programmed switching, and manual switching controls are available. Two-level is a simple and effective way to maximize energy efficiency and reduce cost. Fixtures that are capable of supporting the 2-level sensor are designated by the  symbol.

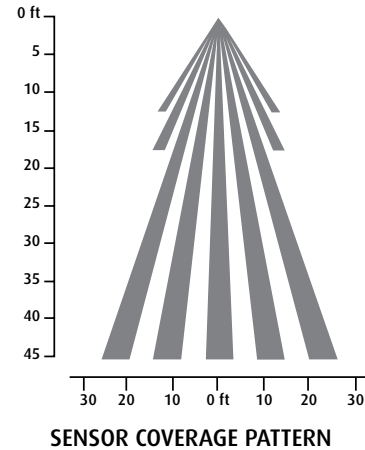

## PREMIUM LAMPS & BALLASTS

Ruud Lighting is pleased to offer premium T8 lamps and ballasts with select linear fluorescent fixtures. Premium high efficiency UltraMax® ballasts from GE® have a ballast factor of 1.18. The optional premium GE lamp is the extra-life, high lumen XL/SPX lamp. The combination of the UltraMax® ballast and the XL/SPX high lumen premium lamp meet or exceed all Consortium of Energy Efficiency (CEE) specifications and are suitable for most federal, state and utility rebate programs.



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## 4-LAMP LINEAR FLUORESCENT HIGH BAY

### LAMPS INCLUDED

LAMP WATTAGE	CATALOG NUMBER				
<b>HARD WIRE</b>					
(4) 32W T8	H1A4X32-U <b>(b)</b>				
(4) 32W T8	H1B4X32-U <b>(b)</b>				
(4) 54W T5HO	H1A4X54-U <b>(b)</b>				
(4) 54W T5HO	H1B4X54-U <b>(b)</b>				
<b>6' CORD &amp; PLUG</b>					
(4) 32W T8	H2A4X32- <b>(a)(b)</b>				
(4) 32W T8	H2B4X32- <b>(a)(b)</b>				
(4) 54W T5HO	H2A4X54- <b>(a)(b)</b>				
(4) 54W T5HO	H2B4X54- <b>(a)(b)</b>				
<b>2-LEVEL INTEGRATED MOTION SENSOR<sup>†</sup> (ADD "K" AFTER CATALOG NUMBER SUFFIX TO DENOTE MOTION SENSOR OPTION)</b>					
T8 (120-277V) (uses program start ballast)					
T5HO (120-277V, 347V [Canada only], 480V)					

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>BALLAST CHOICES FOR HARD WIRE</b>			
480V (T5HO only)	5		
Canada 347V	6		
<b>BALLAST CHOICES WITH 6' CORD &amp; PLUG <sup>(a)</sup></b>			
120V	1		
277V	2		
208V	3		
240V	4		
480V (T5HO only)	5		
Canada 347V	6		
Dual Switching (120V Cord & Plug)	1	D	
Dual Switching (277V Cord & Plug)	2	D	
Dual Switching (without cord)		D	
Housing for use with Plug-N-Go			
Emergency Ballast <sup>▲</sup> (120 or 277V only)	1 or 2	EB	
High Reflectance White Reflector		W	
Lamp Color Temperature <sup>(b)</sup>			
3500K		3	
4100K		4	
5000K		5	
Premium XL/SPX T8 Lamps by GE <sup>®</sup>			
(Replace "X" with "P". Example: H1A4X32-U4 becomes H1A4P32-U4)			

† Consult factory if ordering "K" and "D" option on same fixture

▲ Order emergency ballast from **FIELD-INSTALLED ACCESSORIES**

#### WIRING FOR DUAL SWITCHING

Fixture is factory wired as follows:  
**T8 & T5HO:** Circuit 1 - 2 lamps  
 Circuit 2 - 2 lamps

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Locking-type Receptacle</b> (120V) <b>Locking-type Rec.</b> (120V, 4-wire D or EB option) <b>Locking-type Receptacle</b> (208V or 240V) <b>Locking-type Receptacle</b> (277V) <b>Locking-type Rec.</b> (277V, 4-wire D or EB option) <b>Locking-type Receptacle</b> (Canada 347V) <b>Locking-type Receptacle</b> (480V) <i>(available with fixture purchase only)</i>	L5-15R L14-20R L6-15R L7-15R L16-20R L37*20R L8-20R
 <b>5-foot Safety Cable</b> <i>(Order 2 if using to mount fixture)</i>	SC-5
 <b>Lens Kit</b>	H-LK4
 <b>Wire Guard</b> <i>(Grid pattern of wires is 2" x 2.5")</i>	H-WG4
 <b>Plug-N-Go Emergency Ballast<sup>▼</sup></b> T8: 800 Lumens (120- or 277V) T8: 1350 Lumens (120- or 277V) T8: 3000 Lumens (120- or 277V) <i>Consult factory for T5HO lumen data</i>	H-EB800D H-EB1400D H-EB3000D

▼ Fixture must be ordered with option "EB" from **FACTORY-INSTALLED OPTIONS**

SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES



## 6-LAMP LINEAR FLUORESCENT HIGH BAY


Fixtures feature a die-formed galvanized steel housing. T5HO fixture is supplied with programmed-start electronic ballast. T8 fixture is supplied with a high-ballast-factor, instant-start electronic ballast. Available reflectors include super specular aluminum (95% reflectance) or clear acrylic prismatic. Premium lamp option includes long life, higher lumen lamps. Meets 2008 NEC Article 410.130(G) and CEC ballast disconnect requirements. **NOTE:** Mount fixtures a minimum distance of 7.5" below ceiling. Prismatic reflectors not for use in gymnasiums or machine shops.

**APPLICATIONS:** Warehouse, industrial, commercial, retail projects. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

ALL FIXTURES COME WITH TWO WIRE-FORM HANGERS FOR MOUNTING




### DIMENSIONS




**A**=6.0" (152 mm), **B**=3.5" (89 mm),  
**C**=49.3" (125 cm), **D**=Minimum distance between hangers is 39.4" (100 cm).  
 Fixture is 29.5" (749 mm) wide with 4.3" (108 mm) spacing between lamps.


### OPTICAL CONFIGURATIONS



## 2-LEVEL INTEGRATED SENSOR

Studies have shown the average warehouse aisle is occupied less than 20% of the time. Our optional 2-level control turns off two, four or all lamps within the fixture, **reducing total energy usage by up to 85%**.

Our 2-level control uses an integrated 360° motion sensor that is integrated directly into the fixture. The sensor uses an external two-position switch and adjustable time delay (from 30 seconds to 20 minutes). Two lamp and 347-volt fixtures are pre-wired for "all on/all off" operation. A dual-switching option allows for hard-wired individual ballast switching. Automatic switching, programmed switching, and manual switching controls are available. Two-level is a simple and effective way to maximize energy efficiency and reduce cost. Fixtures that are capable of supporting the 2-level sensor are designated by the  symbol.

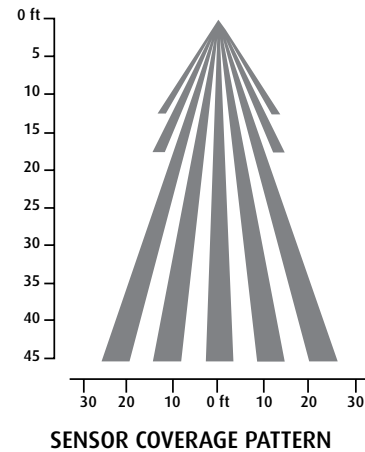

## PREMIUM LAMPS & BALLASTS

Ruud Lighting is pleased to offer premium T8 lamps and ballasts with select linear fluorescent fixtures. Premium high efficiency UltraMax® ballasts from GE® have a ballast factor of 1.18. The optional premium GE lamp is the extra-life, high lumen XL/SPX lamp. The combination of the UltraMax® ballast and the XL/SPX high lumen premium lamp meet or exceed all Consortium of Energy Efficiency (CEE) specifications and are suitable for most federal, state and utility rebate programs.



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



## 6-LAMP LINEAR FLUORESCENT HIGH BAY

### LAMPS INCLUDED

LAMP WATTAGE	CATALOG NUMBER				
<b>HARD WIRE</b>					
⊖ (6) 32W T8	H1A6X32-U <b>(b)</b>				
⊖ (6) 32W T8	H1B6X32-U <b>(b)</b>				
⊖ (6) 54W T5HO	H1A6X54-U <b>(b)</b>				
⊖ (6) 54W T5HO	H1B6X54-U <b>(b)</b>				
<b>6' CORD &amp; PLUG</b>					
⊖ (6) 32W T8	H2A6X32- <b>(a)(b)</b>				
⊖ (6) 32W T8	H2B6X32- <b>(a)(b)</b>				
⊖ (6) 54W T5HO	H2A6X54- <b>(a)(b)</b>				
⊖ (6) 54W T5HO	H2B6X54- <b>(a)(b)</b>				
<b>2-LEVEL INTEGRATED MOTION SENSOR<sup>†</sup> (ADD "K" AFTER CATALOG NUMBER SUFFIX TO DENOTE MOTION SENSOR OPTION)</b>					
⊖ T8 (120-277V) (uses program start ballast)					
⊖ T5HO (120-277V, 347V [Canada only], 480V)					

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HARD WIRE</b>		
480V (T5HO only)	5	
Canada 347V	6	
<b>BALLAST CHOICES WITH 6' CORD &amp; PLUG (a)</b>		
120V	1	
277V	2	
208V	3	
240V	4	
480V (T5HO only)	5	
Canada 347V	6	
Dual Switching (120V Cord & Plug)	1	D
Dual Switching (277V Cord & Plug)	2	D
Dual Switching (without cord)		D
Housing for use with Plug-N-Go		
Emergency Ballast <sup>▲</sup> (120 or 277V only)	1 or 2	EB
High Reflectance White Reflector		W
Lamp Color Temperature (b)		
3500K		3
4100K		4
5000K		5
Premium XL/SPX T8 Lamps by GE <sup>®</sup>		
(Replace "X" with "P". Example: H1A6X32-U4 becomes H1A6P32-U4)		


† Consult factory if ordering "K" and "D" option on same fixture

▲ Order emergency ballast from **FIELD-INSTALLED ACCESSORIES**

#### WIRING FOR DUAL SWITCHING


Fixture is factory wired as follows:  
**T8:** Circuit 1 - 3 lamps    **T5HO:** Circuit 1 - 4 lamps  
 Circuit 2 - 3 lamps        Circuit 2 - 2 lamps

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Locking-type Receptacle</b> (120V) <b>Locking-type Rec.</b> (120V, 4-wire D or EB option)	L5-15R L14-20R
<b>Locking-type Receptacle</b> (208V or 240V) <b>Locking-type Receptacle</b> (277V) <b>Locking-type Rec.</b> (277V, 4-wire D or EB option)	L6-15R L7-15R L16-20R
<b>Locking-type Receptacle</b> (Canada 347V) <b>Locking-type Receptacle</b> (480V) <i>(available with fixture purchase only)</i>	L37*20R L8-20R
 <b>5-foot Safety Cable</b> (Order 2 if using to mount fixture)	SC-5
 <b>Lens Kit</b>	H-LK6
 <b>Wire Guard</b> (Grid pattern of wires is 2" x 2.5")	H-WG6
 <b>Plug-N-Go Emergency Ballast<sup>▼</sup></b> T8: 800 Lumens (120- or 277V) T8: 1350 Lumens (120- or 277V) T8: 3000 Lumens (120- or 277V) <i>Consult factory for T5HO lumen data</i>	H-EB800D H-EB1400D H-EB3000D

▼ Fixture must be ordered with option "EB" from **FACTORY-INSTALLED OPTIONS**


SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

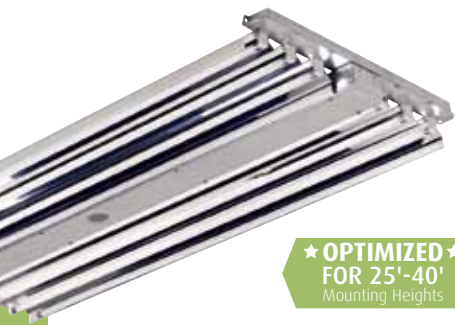

★ **OPTIMIZED** ★  
FOR 25'-40'  
Mounting Heights

ALL FIXTURES COME WITH TWO  
WIRE-FORM HANGERS FOR MOUNTING

## DIMENSIONS



A=6.0" (152 mm), B=3.3" (83 mm),  
C=48.8" (124 cm), D=Minimum distance  
between hangers is 39.4" (100 cm).  
Fixture is 24" (610 mm) wide.



# HN SERIES by RUUD LIGHTING DIRECT

## 6-LAMP SLIM ECONOMY FLUORESCENT HIGH BAY

Fixtures feature a die-formed galvanized steel housing. T5HO fixture is supplied with programmed-start electronic ballast. T8 fixture is supplied with a high-ballast-factor, instant-start electronic ballast. The fixture is supplied with high-efficiency specular aluminum (95% reflectance) reflectors for narrow distribution. Premium lamp option includes long life, higher lumen lamps. Meets 2008 NEC Article 410.130(G) and CEC ballast disconnect requirements. **NOTE:** Mount fixtures a minimum distance of 7.5" below ceiling.

**APPLICATIONS:** Warehouse, industrial, commercial, retail projects and aisles. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

### LAMPS INCLUDED

LAMP WATTAGE	CATALOG NUMBER				
<b>HARD WIRE</b>					
● (6) 32W T8	HN16X32-U <b>(b)</b>				
● (6) 54W T5HO	HN16X54-U <b>(b)</b>				
<b>6' CORD &amp; PLUG</b>					
● (6) 32W T8	HN26X32- <b>(a)(b)</b>				
● (6) 54W T5HO	HN26X54- <b>(a)(b)</b>				
<b>2-LEVEL INTEGRATED MOTION SENSOR</b> † (ADD "K" AFTER CATALOG NUMBER SUFFIX TO DENOTE MOTION SENSOR OPTION)					
● T8 (120-277V) (uses program start ballast)					
● T5HO (120-277V, 347V [Canada only], 480V)					

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HARD WIRE</b>		
480V (T5HO only)	5	
Canada 347V	6	
<b>BALLAST CHOICES WITH 6' CORD &amp; PLUG (a)</b>		
120V	1	
277V	2	
208V	3	
240V	4	
480V (T5HO only)	5	
Canada 347V	6	
Dual Switching (120V Cord & Plug)	1	D
Dual Switching (277V Cord & Plug)	2	D
Dual Switching (without cord)		D
Housing for use with Plug-N-Go Emergency Ballast <sup>▲</sup> (120 or 277V only)	1 or 2	EB
High Reflectance White Reflector		W
Lamp Color Temperature <b>(b)</b>		
3500K		3
4100K		4
5000K		5

Premium XL/SPX T8 Lamps by GE<sup>®</sup>  
(Replace "X" with "P". Example: HN16X32-U4 becomes HN16P32-U4)

† Consult factory if ordering "K" and "D" option on same fixture

▲ Order emergency ballast from **FIELD-INSTALLED ACCESSORIES**

### DUAL SWITCHING WIRING

Fixture is factory wired as follows:  
T8: Circuit 1 - 3 lamps T5HO: Circuit 1 - 4 lamps  
Circuit 2 - 3 lamps Circuit 2 - 2 lamps

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V)	L5-15R
Locking-type Rec. (120V, 4-wire D or EB option)	L14-20R
Locking-type Receptacle (208V or 240V)	L6-15R
Locking-type Receptacle (277V)	L7-15R
Locking-type Rec. (277V, 4-wire D or EB option)	L16-20R
Locking-type Receptacle (Canada 347V)	L37+20R
Locking-type Receptacle (480V)	L8-20R
<i>(available with fixture purchase only)</i>	
<b>5-foot Safety Cable</b> (Order 2 if using to mount fixture)	SC-5
<b>Wire Guard</b> (Grid pattern of wires is 2.375" x 2.375")	H-WG6N
<b>Plug-N-Go Emergency Ballast</b> † T8: 800 Lumens (120- or 277V) T8: 1350 Lumens (120- or 277V) T8: 3000 Lumens (120- or 277V) <i>Consult factory for T5HO lumen data</i>	H-EB800D H-EB1400D H-EB3000D

† Fixture must be ordered with option "EB" from **FACTORY-INSTALLED OPTIONS**

SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES


Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



★ OPTIMIZED ★  
FOR 25'-40'  
Mounting Heights

ALL FIXTURES COME WITH TWO  
WIRE-FORM HANGERS FOR MOUNTING

### DIMENSIONS



A=6.0" (152 mm), B=3.3" (83 mm),  
C=48.8" (124 cm), D=Minimum distance  
between hangers is 39.4" (100 cm).  
Fixture is 24" (610 mm) wide.



# HN SERIES by RUUD LIGHTING DIRECT

## 8-LAMP SLIM ECONOMY FLUORESCENT HIGH BAY

Fixtures feature a die-formed galvanized steel housing. T5HO fixture is supplied with programmed-start electronic ballast. T8 fixture is supplied with a high-ballast-factor, instant-start electronic ballast. The fixture is supplied with high-efficiency specular aluminum (95% reflectance) reflectors for narrow distribution. Premium lamp option includes long life, higher lumen lamps. Meets 2008 NEC Article 410.130(G) and CEC ballast disconnect requirements. **NOTE:** Mount fixtures a minimum distance of 7.5" below ceiling.

**APPLICATIONS:** Warehouse, industrial, commercial, retail projects and aisles. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

### LAMPS INCLUDED

LAMP WATTAGE	CATALOG NUMBER				
<b>HARD WIRE</b>					
(8) 32W T8	HN18X32-U <b>(b)</b>				
(8) 54W T5HO	HN18X54-U <b>(b)</b>				
<b>6' CORD &amp; PLUG</b>					
(8) 32W T8	HN28X32- <b>(a)(b)</b>				
(8) 54W T5HO	HN28X54- <b>(a)(b)</b>				
<b>2-LEVEL INTEGRATED MOTION SENSOR † (ADD "K" AFTER CATALOG NUMBER SUFFIX TO DENOTE MOTION SENSOR OPTION)</b>					
T8 (120-277V) (uses program start ballast)					
T5HO (120-277V)					

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES WITH 6' CORD &amp; PLUG (a)</b>		
120V	1	
277V	2	
208V	3	
240V	4	
Dual Switching (120V Cord & Plug)	1	D
Dual Switching (277V Cord & Plug)	2	D
Dual Switching (without cord)		D
Housing for use with Plug-N-Go Emergency Ballast <sup>▲</sup> (120 or 277V only)	1 or 2	EB
High Reflectance White Reflector		W
Lamp Color Temperature (b)		
3500K		3
4100K		4
5000K		5
Premium XL/SPX T8 Lamps by GE <sup>®</sup> (Replace "X" with "P". Example: HN18X32-U4 becomes HN18P32-U4)		

† Consult factory if ordering "K" and "D" option on same fixture

▲ Order emergency ballast from **FIELD-INSTALLED ACCESSORIES**

### DUAL SWITCHING WIRING

Fixture is factory wired as follows:  
T8 & T5HO: Circuit 1 – 4 lamps  
Circuit 2 – 4 lamps

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V) Locking-type Rec. (120V, 4-wire D or EB option) Locking-type Receptacle (208V or 240V) Locking-type Receptacle (277V) Locking-type Rec. (277V, 4-wire D or EB option) <i>(available with fixture purchase only)</i>	L5-15R L14-20R L6-15R L7-15R L16-20R
5-foot Safety Cable (Order 2 if using to mount fixture)	SC-5
Wire Guard (Grid pattern of wires is 2.375" x 2.375")	H-WG6N
Plug-N-Go Emergency Ballast <sup>▼</sup> T8: 800 Lumens (120- or 277V) T8: 1350 Lumens (120- or 277V) T8: 3000 Lumens (120- or 277V) <i>Consult factory for T5HO lumen data</i>	H-EB800D H-EB1400D H-EB3000D

▼ Fixture must be ordered with option "EB" from **FACTORY-INSTALLED OPTIONS**


SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

# IA SERIES by RUUD LIGHTING DIRECT

## 16" ALUMINUM HIGH BAY



A Minimum 105°C Supply Conductors Are Required for HSB Mount. NOT FOR USE IN DWELLINGS.



NOTE: \* 1000W MH uses a spacer between the reflector and the housing, adding 2" (51 mm) to overall fixture height.



All PSMH fixtures are supplied with open-rated lamps and sockets

The IA Series fixture is designed to control glare and is a good option for a variety of commercial and retail applications. The sealed die-cast aluminum housing with aluminum reflector provides more than 80% efficiency. Select from a variety of lamp types and wattages through 1000W, ballast options and mounts. Wet listed fixture option available.

**APPLICATIONS:** Commercial or retail projects where controlling glare is important.

### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
150W PSMH	IA1615-MO	IA2615-(a)O
250W PSMH	IA1625-MO	IA2625-(a)O
320W PSMH	IA1632-MO	IA2632-(a)O
400W PSMH	IA1640-MO	IA2640-(a)O
750W PSMH*	IA1675-MN	IA2675-(a)N
1000W PSMH	IA1699-MEN	IA2699-(a)EN
1000W MH*	IA1499-MN	IA2499-(a)N
150W HPS	IA1515-M	IA2515-(a)
250W HPS	IA1525-M	IA2525-(a)
400W HPS	IA1540-M	IA2540-(a)

⊕ Reduced envelope lamp. ED28 for 320W PSMH. BT37 for 1000W PSMH.

▲ S-rated lamp, open-rated not available; specify enclosed if required. See Options.

▼ S-rated lamp, specify open-rated lamp if required. See Options.



HINGED SPLICE BOX



HOOK, CORD & PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

### WET LISTED OPTION

EZ Bay Plus Wet Listed fixtures are an excellent choice for environments with heavy spray-downs such as produce storage centers, dairy barns, misting zones and other commercial locations. Our reflectors are totally enclosed with full silicone gasketing at connection to fixture and between lens and frame.

To order replace "I" prefix with "IP" and add "E" lens suffix. 400W maximum.

Example: IA1625-MO becomes **IPA1625-ME**



EYEBOLT & CORD



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
277V Reactor (150W-400W PSMH only)	27	
480V (150W HPS only)	5	
(MH, PSMH, and 250W-400W HPS only)	5	
Canada Tri-volt (120/277/347V) (150W HPS only)	T	
(MH, PSMH, and 250W-400W HPS only)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
277V Reactor ballast (PSMH only)	27	
120V, 277V, 208V, or 240V	1, 2, 3 or 4	
480V (150W HPS only)	5	
(MH, PSMH, and 250W-400W HPS only)	5	
Canada 347V	6	
Single Fuse (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
Dual Fuse (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
2-Level Integrated Sensor (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
Quartz Standby (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q
Flat Glass Lens (Standard on 1000W PSMH) 750W PSMH, 1000W MH, HPS (IP65 400W max) (⊕ BT37 reduced envelope lamp on MH & PSMH) (150W - 400W PSMH only)		E change O to E
Adjustable Neck Housing (standard on 750W-1000W PSMH & 1000W MH)		N
Open-rated lamp (1000W MH only)		O
Optical Chamber Air Filter (for use only with "E" lens options)		B
Wire Guard (750W PSMH, 1000W MH, HPS only) (use only with "E" Flat Glass Lens) (see Accessories for fixture with no lens)		W

† Available for use on Wet Listed fixtures. No adder for "E" lens on Wet Listed fixtures.

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V)	L5-15R
Locking-type Receptacle (208V or 240V)	L6-15R
Locking-type Receptacle (277V)	L7-15R
Locking-type Receptacle (Canada 347V)	L37*20R
Locking-type Receptacle (480V)	L8-20R
(available with fixture purchase only)	
Power Hook (for use with HCP mount) (120V, 277V or 277V Reactor, 208V, 240V)	PH-(a) (1, 2, 3, 4)
Power Hook (480V)	PH-5
Power Hook (Canada 347V)	PH+6
Safety Cable with Hang-Fast, Galvanized	SC-5
Safety Cable with Hang-Fast, Stainless (Wet Listed) †	SC-5C
(Cable is 5' / 1.5 m)	
Wire Guard (for fixture with no lens)	WG-A
Wire Guard with Relamp Opening (for fixture with no lens)	WG-A/OC


† Available for use on Wet Listed fixtures.

SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## ADJUSTABLE NECK OPTION

STANDARD ON 750W & 1000W PSMH and 1000W MH

NOTE: \* 1000W MH, use a spacer between the reflector and the housing, adding 2" (51 mm) to overall fixture height.



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# IAP SERIES by RUUD LIGHTING DIRECT

## 16" PRISMATIC HIGH BAY

The IAP Series fixture is the perfect choice for commercial and retail applications. The sealed die-cast aluminum housing with clear acrylic prismatic reflector delivers more than 90% efficiency and approximately 15% uplight. Select from a variety of lamp types and wattages through 400W, ballast options and mounts. **NOTE:** Enclosure not available higher than 250 watts.

**APPLICATIONS:** Commercial or retail projects. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

A Minimum 105°C Supply Conductors Are Required for HSB Mount. NOT FOR USE IN DWELLINGS.



**NOTE:** \* 400W PSMH uses a spacer between the reflector and the housing, adding 2" (51 mm) to overall fixture height.

### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
150W PSMH	IAP1615-MO	IAP2615-(a)0
250W PSMH	IAP1625-MO	IAP2625-(a)0
320W PSMH	IAP1632-MO	IAP2632-(a)0
400W PSMH	IAP1640-MO	IAP2640-(a)0
150W HPS	IAP1515-M	IAP2515-(a)
250W HPS	IAP1525-M	IAP2525-(a)
400W HPS	IAP1540-M	IAP2540-(a)

Ⓢ Reduced envelope lamp. ED28 for 320W PSMH.



HINGED SPLICE BOX



HOOK, CORD & PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS



All PSMH fixtures are supplied with open-rated lamps and sockets

## FACTORY-INSTALLED OPTIONS


DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
277V Reactor (150W-400W PSMH only)	27	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada Tri-volt (120/277/347V) (150W HPS only)	T	
(PSMH & 250W-400W HPS only)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
277V Reactor ballast (PSMH only)	27	
120V, 277V, 208V, or 240V	1, 2, 3 or 4	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada 347V	6	
Single Fuse (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
Dual Fuse (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
2-Level Integrated Sensor (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
Quartz Standby (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q
Prismatic Acrylic Drop Lens 250W HPS max (n/a with "W" option) 250W PSMH max (n/a with "W" option)		A change O to A
Flat Acrylic Lens 250W HPS max 250W PSMH max		E change O to E
Conical Acrylic Drop Lens 250W HPS max (n/a with "W" option) 250W PSMH max (n/a with "W" option)		Y change O to Y
Adjustable Neck Housing		N
Optical Chamber Air Filter (250W max) (for use only with "A", "E" or "Y" lens options)		B
Wire Guard (use only with "E" Flat Acrylic Lens) (see Accessories for fixture with no lens)		W

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V)	L5-15R
Locking-type Receptacle (208V or 240V)	L6-15R
Locking-type Receptacle (277V)	L7-15R
Locking-type Receptacle (Canada 347V)	L37*20R
Locking-type Receptacle (480V)	L8-20R
<i>(available with fixture purchase only)</i>	
Power Hook (for use with HCP mount) (120V, 277V or 277V Reactor, 208V, 240V)	PH-(a) (1, 2, 3, 4)
Power Hook (480V)	PH-5
Power Hook (Canada 347V)	PH*6
Safety Cable with Hang-Fast (Cable is 5' / 1.5 m)	SC-5
Wire Guard (for fixture with no lens)	WG-AP
Wire Guard with Relamp Opening (for fixture with no lens)	WG-AP/OC

SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

### ADJUSTABLE NECK OPTION



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# IAR SERIES by

## 22"/25" PRISMATIC HIGH BAY



A Minimum 105°C Supply Conductors Are Required for HSB Mount. NOT FOR USE IN DWELLINGS.



The IAR Series fixture is an ideal choice for a variety of commercial and retail applications. The sealed die-cast aluminum housing with clear acrylic prismatic reflector provides more than 90% efficiency and approximately 15% uplight. Select from a variety of lamp types and wattages through 1000W, ballast options and mounts. **NOTE:** Enclosure not available higher than 400 watts.

**APPLICATIONS:** Commercial or retail projects. Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids.

### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
250W PSMH	IAR1625-MO	IAR2625-(a)O
320W PSMH	IAR1632-MO	IAR2632-(a)O
400W PSMH	IAR1640-MO	IAR2640-(a)O
750W PSMH	IAR1675-MN	IAR2675-(a)N
1000W MH	IAR1499-MN	IAR2499-(a)N
250W HPS	IAR1525-M	IAR2525-(a)
400W HPS	IAR1540-M	IAR2540-(a)

- ⊕ Reduced envelope lamp. ED28 for 320W PSMH.
- ▲ S-rated lamp, open-rated not available; wattage too high for enclosure
- ▼ 25" diameter reflector and Adjustable Neck (option "N") are standard



HINGED  
SPLICE  
BOX



HOOK,  
CORD &  
PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS



All PSMH fixtures are supplied with open-rated lamps and sockets

## FACTORY-INSTALLED OPTIONS


DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
277V Reactor (250W-400W PSMH only)	27	
480V	5	
Canada Tri-volt (120/277/347V)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
277V Reactor ballast (PSMH only)	27	
120V, 277V, 208V, or 240V	1, 2, 3 or 4	
480V	5	
Canada 347V	6	
Single Fuse (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
Dual Fuse (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
2-Level Integrated Sensor (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
Quartz Standby (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q
Prismatic Acrylic Drop Lens 400W HPS max (n/a with "W" option) 400W PSMH max (n/a with "W" option)		A change O to A
Flat Acrylic Lens 400W HPS max 400W PSMH max		E change O to E
Conical Acrylic Drop Lens 400W HPS max (n/a with "W" option) 400W PSMH max (n/a with "W" option)		Y change O to Y
Adjustable Neck Housing (standard on 750W PSMH & 1000W MH)		N
Open-rated lamp (1000W MH only)		O
Optical Chamber Air Filter (250W max) (for use only with "A", "E" or "Y" lens options)		B
Wire Guard (use only with "E" Flat Acrylic Lens) (see Accessories for fixture with no lens)		W

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V) Locking-type Receptacle (208V or 240V) Locking-type Receptacle (277V) Locking-type Receptacle (Canada 347V) Locking-type Receptacle (480V) <i>(available with fixture purchase only)</i>	L5-15R L6-15R L7-15R L37*20R L8-20R
Power Hook (for use with HCP mount) (120V, 277V or 277V Reactor, 208V, 240V) Power Hook (480V) Power Hook (Canada 347V)	PH-(a) (1, 2, 3, 4) PH-5 PH+6
Safety Cable with Hang-Fast (Cable is 5' /1.5 m)	SC-5
Wire Guard (for fixture with no lens) (n/a with 750W PSMH or 1000W MH)	WG-AR
Wire Guard with Relamp Opening (for fixture with no lens) (n/a with 750W PSMH or 1000W MH)	WG-AR/OC

SEE PAGES 32-33 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

### ADJUSTABLE NECK OPTION STANDARD ON 750W PSMH & 1000W MH



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# IC SERIES by RUUD LIGHTING DIRECT

## 16" COMPACT LOW BAY

The Compact Low Bay features an acrylic refractor that is injection molded with a prismatic design to soften and disperse light from the reflector for maximum efficiency and glare control. Choose from a variety of high-power factor ballasts, mogul-base lamps up to 400W, and mountings. Wet listed fixture option is available.

**APPLICATIONS:** Low to medium mounting heights, commercial or retail projects.



### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
150W PSMH	IC1615-M	IC2615-(a)
250W PSMH	IC1625-M	IC2625-(a)
320W PSMH <sup>†</sup>	IC1632-M	IC2632-(a)
400W PSMH	IC1640-M	IC2640-(a)
150W HPS	IC1515-M	IC2515-(a)
250W HPS	IC1525-M	IC2525-(a)
400W HPS	IC1540-M	IC2540-(a)

<sup>†</sup> Reduced envelope lamp. ED28 for 320W PSMH.



HINGED SPLICE BOX



HOOK, CORD & PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

### WET LISTED OPTION

EZ Bay Plus Wet Listed fixtures are an excellent choice for environments with heavy spray-downs such as produce storage centers, dairy barns, misting zones and other commercial locations. Our reflectors are totally enclosed with full silicone gasketing at connection to fixture and between lens and frame.

To order replace "I" prefix with "IP".

**Example:** IC1625-M becomes **IP**C1625-M



EYEBOLT & CORD



for Wet Locations



for Damp Locations

All PSMH fixtures are supplied with open-rated lamps and sockets

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
<b>277V Reactor</b> (150W-400W PSMH only)	27	
<b>480V</b> (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
<b>Canada Tri-volt</b> (120/277/347V) (150W HPS only)	T	
(PSMH & 250W-400W HPS only)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
<b>277V Reactor ballast</b> (PSMH only)	27	
<b>120V, 277V, 208V, or 240V</b>	1, 2, 3 or 4	
<b>480V</b> (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
<b>Canada 347V</b>	6	
<b>Single Fuse</b> (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>2-Level Integrated Sensor</b> (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
<b>Quartz Standby</b> <sup>†</sup> (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q
<b>Polycarbonate Prismatic Drop Lens</b>		V

<sup>†</sup> Available for use on Wet Listed fixtures.

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Locking-type Receptacle</b> (120V)	L5-15R
<b>Locking-type Receptacle</b> (208V or 240V)	L6-15R
<b>Locking-type Receptacle</b> (277V)	L7-15R
<b>Locking-type Receptacle</b> (Canada 347V)	L37*20R
<b>Locking-type Receptacle</b> (480V)	L8-20R
<i>(available with fixture purchase only)</i>	
<b>Power Hook</b> (for use with HCP mount) (120V, 277V or 277V Reactor, 208V, 240V)	PH-(a)
<b>Power Hook</b> (480V)	(1, 2, 3, 4) PH-5
<b>Power Hook</b> (Canada 347V)	PH*6
<b>Safety Cable with Hang-Fast, Galvanized</b>	SC-5
<b>Safety Cable with Hang-Fast, Stainless</b> (Wet Listed) <sup>†</sup>	SC-5C
<i>(Cable is 5' / 1.5 m)</i>	

<sup>†</sup> Available for use on Wet Listed fixtures.

SEE PAGE 32 FOR MORE INFORMATION ABOUT THESE ACCESSORIES


# ICM SERIES by RUUD LIGHTING DIRECT

## 22" MEDIUM LOW BAY



The Medium Low Bay provides diffuse light distribution without glare where high illumination is needed. The acrylic refractor lens disperses light evenly and controls glare. Choose from a variety of high-power factor ballasts, mogul-base lamps up to 400W, and mountings. Wet listed fixture option is available.

**APPLICATIONS:** Low heights, commercial or retail projects.

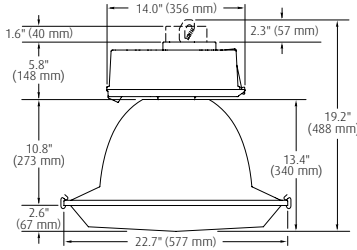

### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
150W PSMH	ICM1615-M	ICM2615-(a)
250W PSMH	ICM1625-M	ICM2625-(a)
320W PSMH	ICM1632-M	ICM2632-(a)
400W PSMH	ICM1640-M	ICM2640-(a)
150W HPS	ICM1515-M	ICM2515-(a)
250W HPS	ICM1525-M	ICM2525-(a)
400W HPS	ICM1540-M	ICM2540-(a)

⚡ Reduced envelope lamp. ED28 for 320W PSMH.



HINGED SPLICE BOX



HOOK, CORD & PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

### WET LISTED OPTION

EZ Bay Plus Wet Listed fixtures are an excellent choice for environments with heavy spray-downs such as produce storage centers, dairy barns, misting zones and other commercial locations. Our reflectors are totally enclosed with full silicone gasketing at connection to fixture and between lens and frame.

To order replace "I" prefix with "IP".

**Example:** ICM1625-M becomes IPICM1625-M



EYEBOLT & CORD



for Wet Locations



for Damp Locations

All PSMH fixtures are supplied with open-rated lamps and sockets

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
277V Reactor (150W-400W PSMH only)	27	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada Tri-volt (120/277/347V) (150W HPS only)	T	
(PSMH & 250W-400W HPS only)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
277V Reactor ballast (PSMH only)	27	
120V, 277V, 208V, or 240V	1, 2, 3 or 4	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada 347V	6	
Single Fuse (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
Dual Fuse (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
2-Level Integrated Sensor (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
Quartz Standby † (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q
Polycarbonate Prismatic Drop Lens		V

† Available for use on Wet Listed fixtures.

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V)	L5-15R
Locking-type Receptacle (208V or 240V)	L6-15R
Locking-type Receptacle (277V)	L7-15R
Locking-type Receptacle (Canada 347V)	L37*20R
Locking-type Receptacle (480V)	L8-20R
<i>(available with fixture purchase only)</i>	
Power Hook (for use with HCP mount)	PH-(a)
(120V, 277V or 277V Reactor, 208V, 240V)	(1, 2, 3, 4)
Power Hook (480V)	PH-5
Power Hook (Canada 347V)	PH*6
Safety Cable with Hang-Fast, Galvanized	SC-5
Safety Cable with Hang-Fast, Stainless (Wet Listed) †	SC-5C
(Cable is 5' / 1.5 m)	

† Available for use on Wet Listed fixtures.

SEE PAGE 32 FOR MORE INFORMATION ABOUT THESE ACCESSORIES




# ICJ SERIES by RUUD LIGHTING DIRECT

## 28" JUMBO LOW BAY

The ICJ Low Bay provides efficient, symmetric light distribution for warehouses, aisle lighting and applications where high illumination levels are required. The acrylic refractor is injection molded with a prismatic design to soften and disperse light from the reflector for maximum efficiency and glare control. Choose from a variety of high-power factor ballasts, mogul-base lamps up to 400W, and mountings. Wet listed fixture option is available.

**APPLICATIONS:** Lowest mounting heights, commercial or retail projects.

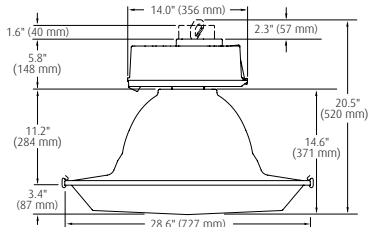

### LAMP INCLUDED

LAMP WATTAGE	CATALOG # HSB MOUNT	CATALOG # HCP MOUNT
150W PSMH	ICJ1615-M	ICJ2615-(a)
250W PSMH	ICJ1625-M	ICJ2625-(a)
320W PSMH	ICJ1632-M	ICJ2632-(a)
400W PSMH	ICJ1640-M	ICJ2640-(a)
150W HPS	ICJ1515-M	ICJ2515-(a)
250W HPS	ICJ1525-M	ICJ2525-(a)
400W HPS	ICJ1540-M	ICJ2540-(a)

⚡ Reduced envelope lamp. ED28 for 320W PSMH.



HINGED  
SPLICE  
BOX



HOOK,  
CORD &  
PLUG

SEE PAGE 49 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

### WET LISTED OPTION

EZ Bay Plus Wet Listed fixtures are an excellent choice for environments with heavy spray-downs such as produce storage centers, dairy barns, misting zones and other commercial locations. Our reflectors are totally enclosed with full silicone gasketing at connection to fixture and between lens and frame.

To order replace "I" prefix with "IP".

Example: ICJ1625-M becomes IPJ1625-M



EYEBOLT  
& CORD



for Wet  
Locations



for Damp  
Locations

All PSMH fixtures are supplied with open-rated lamps and sockets

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>BALLAST CHOICES FOR HINGED SPLICE BOX</b>		
277V Reactor (150W-400W PSMH only)	27	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada Tri-volt (120/277/347V) (150W HPS only)	T	
(PSMH & 250W-400W HPS only)	T	
<b>BALLAST CHOICES FOR HOOK, CORD &amp; PLUG (a)</b>		
277V Reactor ballast (PSMH only)	27	
120V, 277V, 208V, or 240V	1, 2, 3 or 4	
480V (150W HPS only)	5	
(PSMH & 250W-400W HPS only)	5	
Canada 347V	6	
Single Fuse (277V reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
Dual Fuse (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
2-Level Integrated Sensor (120, 277, 208, 240, 480, or 347V) (n/a 277V Reactor)	1, 2, 3, 4, 5 or 6	K
Quartz Standby † (delay-relay type) (includes 100W Q lamp) (n/a 277V Reactor)		Q

† Available for use on Wet Listed fixtures.

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
Locking-type Receptacle (120V)	L5-15R
Locking-type Receptacle (208V or 240V)	L6-15R
Locking-type Receptacle (277V)	L7-15R
Locking-type Receptacle (Canada 347V)	L37*20R
Locking-type Receptacle (480V)	L8-20R
<i>(available with fixture purchase only)</i>	
Power Hook (for use with HCP mount) (120V, 277V or 277V Reactor, 208V, 240V)	PH-(a)
Power Hook (480V)	PH-5
Power Hook (Canada 347V)	PH-6
Safety Cable with Hang-Fast, Galvanized	SC-5
Safety Cable with Hang-Fast, Stainless (Wet Listed) †	SC-5C
(Cable is 5' / 1.5 m)	

† Available for use on Wet Listed fixtures.

SEE PAGE 32 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

# HIGH & LOW BAY

## Mounting Options & Accessories

**HINGED SPLICE BOX – HSB**



Designed for surface or pendant mounting, the HSB has two 3/4" and six 1/2" knockouts on the sides and one 3/4" adjustable knockout and mounting holes for common junction boxes on top. The galvanized steel HSB is roomy, measuring 4"W x 4"L x 1.6"H (102 mm W x 102 mm L x 41 mm H).

**HOOK, CORD & PLUG – HCP**



To suspend luminaire from a ceiling eye hanger (customer supplied), a quick connect hook with retainer spring is provided. Supplied with a 30-inch (762 mm) SJEOW cord and a voltage-specific NEMA standard locking-type plug for appropriate voltage.

**EYEBOLT & CORD – WET LISTED**



For IA, IC, ICM and ICJ fixtures when ordered with Wet Listed option. To suspend fixture from a ceiling eye hanger (customer supplied), an eyebolt and C-clasp is provided. Furnished with a 30-inch (762 mm) cord connected to fixture with wet location fitting. Cord to be hard wired.

**OPTICAL CHAMBER AIR FILTER**



For IA, IAP and IAR Series. Helps prevent dirt contaminants from entering the optical chamber. The Dacron Polyester felt filter is installed in the top closure of the enclosure option; add suffix "B" to enclosure catalog number.

**DESCRIPTION**

Optical Chamber Air Filter

**POWER HOOK**



Use with Hook, Cord & Plug mounts. Provides three threaded knockouts for 1/2" conduit, an eye hanger to support the luminaire and a locking-type receptacle for appropriate voltage.

VOLTAGE	CATALOG #
120V	PH-1
277V	PH-2
208V	PH-3
240V	PH-4
480V	PH-5
Canada 347V	PH*6

**LOCKING-TYPE RECEPTACLE**



A NEMA standard, locking-type receptacle is available for use with any Hook, Cord & Plug mount fixture.

4-wire receptacle for use with "EB" or "D" options on fluorescent fixtures.

Available with fixture purchase only.


VOLTAGE	CATALOG #
120V	L5-15R
120V, 4-wire	L14-20R
277V	L7-15R
277V, 4-wire	L16-20R
208/240V	L6-15R
480V	L8-20R
Canada 347V	L37*20R

**SAFETY CABLE – EZ BAY PLUS®**



5' (1.5 m) long safety cable with Hang-Fast provides added safety. Recommended for all Hook, Cord & Plug mount fixtures. SC-5C required for Wet Listed fixtures.

**CATALOG #**

- SC-5 (galvanized)
- SC-5C (stainless steel) 

**SAFETY CABLE – H & HN SERIES**



5' (1.5 m) long safety cable with Hang-Fast provides added safety. Two required if using for mounting.

**CATALOG #**

SC-5

**EXTERNAL FUSE**



Fusing can help troubleshoot a short or overload in the circuit. A single fuse is used for fixtures with a 120-, 277- or Canada 347-volt ballast. A dual fuse is used for fixtures with a 208-, 240- or 480-volt ballast. Single-voltage ballast supplied (n/a on dual-volt, multi-volt or tri-volt). Add suffix "F" to the catalog number.

**DESCRIPTION**

- Single Fuse
- Dual Fuse (n/a Canada)

**DELAY-RELAY QUARTZ STANDBY**



Delay-relay, quartz standby option is available for all fixtures, except the Shallow Low Bays. After a momentary power interruption, the quartz standby supplies safety lighting until the HID lamp restrikes and reaches approximately 50 percent brightness. This option includes a 100-watt quartz lamp. Add suffix "Q" to the catalog number.

**DESCRIPTION**

Quartz Option

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# HIGH & LOW BAY

Mounting Options & Accessories



DROP PRISMATIC ACRYLIC LENS

Add suffix "A" to the catalog number.

**DESCRIPTION**

16" IAP Series - 3.2" deep  
(250W max.)

22" IAR Series - 2.3" deep  
(400W max.)



FLAT ACRYLIC LENS

For 16-inch IAP Series fixtures. It is also available for 22-inch IAR Series fixtures. Add suffix "E" to the catalog number.

**DESCRIPTION**

16" IAP Series (250W max.)

22" IAR Series (400W max.)



ACRYLIC CONICAL LENS

Attaches easily with a V-band collar.

**DESCRIPTION**

**ADDER**

**IAP Series** (1.7" deep)  
(n/a with "W" option)  
(250W max.)

**\$34**

Add suffix "Y" to catalog no.

**IAR Series** (2" deep)  
(n/a with "W" option)  
(400W max.)

**\$45**

Add suffix "Y" to catalog no.

**FP Series** (1.06" deep)

**\$19**

PSMH (Change suffix "O" to "Y")

HPS (Add suffix "Y" to catalog #)



FLAT GLASS LENS

A clear, tempered-glass lens in a gasketed steel frame simply clips onto the bottom of the reflector. Included top enclosure attaches to the reflector, reducing dirt contamination in the optical chamber. Standard on 1000-watt PSMH fixtures. Hardware included. Add suffix "E" to catalog number. **FACTORY INSTALLED.**

**DESCRIPTION**

IA Series



WIRE GUARD

Steel guard attaches to reflector with V-band. Not for use with lens enclosures. Hardware included. Factory-installed option for 1000W PSMH fixtures, suffix "W."

**SERIES CATALOG #**

IA Series WG-A

IAP Series WG-AP

IAR Series<sup>▲</sup> WG-AR

<sup>▲</sup> n/a 750W & 1000W



WIRE GUARD W/RELAMP OPENING

Relamp easily without removing the wire guard. Attaches to reflector with V-band. Not for use with lens enclosures. Hardware included.

**SERIES CATALOG #**

IA Series WG-A/OC

IAP Series WG-AP/OC

IAR Series<sup>▲</sup> WG-AR/OC

<sup>▲</sup> n/a 750W & 1000W



EM BALLAST - H & HN SERIES

800 lumens

1350 lumens

3000 lumens

For H and HN Series fixtures only. Single lamp field installed Plug-N-Go emergency ballast. Will operate one lamp for 90 minutes. Available on 120- or 277-volt only. Provides easy field installation and maintenance of battery packs. Fixture must be ordered with "EB" option. If using with Cord & Plug mount, 4-wire receptacle must be used.


**DESCRIPTION CATALOG #**

T8: 800 lumens H-EB800D

T8: 1350 lumens H-EB1400D

T8: 3000 lumens H-EB3000D

Consult factory for T5HO lumen data.



LENS KIT - H SERIES

Clear acrylic lens with white painted steel end-covers. Available for four- or six-lamp H Series fixtures.

**SERIES CATALOG #**

H (4-lamp) H-LK4

H (6-lamp) H-LK6



WIRE GUARD - H SERIES

Steel wire guard with white painted finish. Includes mounting hardware.

**SERIES CATALOG #**

H (2-lamp) H-WG2

H (4-lamp) H-WG4

H (6-lamp) H-WG6



WIRE GUARD - HN SERIES

Steel wire guard with white painted finish. Includes mounting hardware.

**SERIES CATALOG #**

HN (6/8 lamp) H-WG6N

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	OPTICAL PATTERN	PAGE NUMBER
STANDARD		<b>NSF SERIES</b> Standard Economy Flood	150W – 400W HID		Page 37
		<b>NSW SERIES</b> Wide Economy Flood	150W – 400W HID		Page 39
		<b>NS SERIES</b> Compact Economy Flood	50W – 150W HID 13 – 42W CFL		Page 40
		<b>FS SERIES</b> Square Standard Floodlight	70W – 1000W HID		Page 42
		<b>LFS SERIES</b> Rectangular Standard Floodlight	70W – 150W HID		Page 43
SIGN UPLIGHT		<b>W SERIES</b> Sign Uplight	70W – 400W HID		Page 41
FORWARD THROW		<b>NSC SERIES</b> Forward Throw Economy Flood	150W – 400W HID		Page 38
		<b>CF SERIES</b> Square Forward Throw Floodlight	70W – 1000W HID		Page 44
		<b>LCF SERIES</b> Rectangular Forward Throw Floodlight	70W – 150W HID		Page 45
SPOTLIGHT		<b>PM SERIES</b> Square Spotlight	70W – 1000W HID		Page 46
		<b>LPM SERIES</b> Rectangular Spotlight	70W – 150W HID		Page 47
		<b>PN SERIES</b> Square Narrow Spotlight	70W – 1000W HID		Page 48
		<b>LPN SERIES</b> Rectangular Narrow Spotlight	70W – 150W HID		Page 49

# CUTOFF PARKING & AREA

		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	OPTICAL PATTERN	PAGE NUMBER
WIDE THROW	 <b>PR SERIES</b>	Square Wide Throw Area Light	70W - 1000W HID		Page 50
	 <b>LPR SERIES</b>	Rectangular Wide Throw Area Light	70W - 150W HID		Page 51
	 <b>AVH3 SERIES</b>	Horizontal-Lamp Wide Throw Aviator®	70W - 400W HID		Page 52
	 <b>AVV3 SERIES</b>	Vertical-Lamp Wide Throw AeroDome®	150W - 1000W HID		Page 53
	 <b>VPR SERIES</b>	Square Vertical-Lamp Wide Throw Area Light	250W - 1000W HID		Page 54
	 <b>WPR SERIES</b>	Wedge Wide Throw Area Light	100W - 400W HID		Page 55
	 <b>AVVA SERIES</b>	Automotive Frontline AeroDome®	250W - 1000W HID		Page 64
FORWARD THROW	 <b>AC SERIES</b>	Square Forward Throw Area Light	70W - 750W HID		Page 56
	 <b>LAC SERIES</b>	Rectangular Forward Throw Area Light	70W - 150W HID		Page 57
	 <b>AVH4 SERIES</b>	Horizontal-Lamp Forward Throw Aviator®	70W - 400W HID		Page 58
	 <b>AVV4 SERIES</b>	Vertical-Lamp Forward Throw AeroDome®	150W - 1000W HID		Page 59
	 <b>VFT SERIES</b>	Square Vertical-Lamp Forward Throw Area Light	250W - 1000W HID		Page 60
	 <b>WAC SERIES</b>	Wedge Forward Throw Area Light	100W - 400W HID		Page 61
SYMMETRIC	 <b>QV SERIES</b>	Square Vertical-Lamp Symmetric Post Top Light	70W - 1000W HID		Page 62
	 <b>AVV5 SERIES</b>	Vertical-Lamp Symmetric AeroDome®	150W - 1000W HID		Page 63

# PROPER ETIQUETTE FOR LIGHTING "OLD GLORY"

## Guidelines for appropriate lighting of the U.S. Flag

The American flag is the nation's most recognizable symbol. The flag is a way to celebrate freedom and show patriotism. In order to protect the integrity of the flag, many regulations, including how the flag is displayed, have been put into place by the government.

According to the U.S. Flag Code, flags are traditionally displayed from sunrise to sunset but can be presented continuously if properly illuminated during nighttime hours. The flag must be clearly visible at all times regardless of wind direction or visibility.

### FLAG LIGHTING GUIDELINES

- In most instances, a single ground mounted metal halide fixture placed in close proximity (2' to 5') to the base of the flagpole will provide sufficient illumination to the flag.
- Depending on the height of the pole and the ambient light levels in the area, various wattages and/or fixture types should be considered.

Up to 20'	150W PSMH Spotlight, PM Series (page 46)
20' to 25'	320W/400W PSMH Spotlight, PM Series (page 46)
25' to 40'	320W/400W PSMH Narrow Spotlight, PN Series (page 48)
40' and up	1000W MH Narrow Spotlight, PN Series (page 48)

*Order fixtures with Uplight Lens, option "U"*

- These recommendations are based on average flag light levels with moderately lit surrounding areas. If ambient light levels in the area are higher, you might consider increasing the wattage. Likewise, if the surrounding area is dimly lit, lower wattages may be used.



As a precaution, check local Dark Sky guidelines on using floodlights for flagpole illumination. Many floodlights can be ordered with glare shields or internal louvers that help to direct light into the targeted area.



For help with an upcoming lighting project, contact our Application Engineering Team at **(800) 236-7000**

or by email at

[applications@ruudlightingdirect.com](mailto:applications@ruudlightingdirect.com)





# NSF SERIES by **RUUD LIGHTING DIRECT**

## STANDARD ECONOMY FLOOD

The NSF Series Flood is typically installed with a 45- to 60-degree tilt above horizontal to provide wide coverage of illumination. The 14-inch square fixture features a copper-free, die-cast aluminum housing and lens frame and is designed for easy installation and serviceability. A versatile lens frame makes this fixture suitable for downlighting and uplighting applications.

**APPLICATIONS:** Large open areas, facades, sign lighting, and security applications

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	14"	NSF*615-M
250W PSMH	14"	NSF*625-M
320W PSMH 	14"	NSF*632-M
400W PSMH 	14"	NSF*640-M
150W HPS	14"	NSF*515-M
250W HPS	14"	NSF*525-M
400W HPS	14"	NSF*540-M

 Reduced envelope lamp. ED28 for 320W and 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS



MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (PSMH only)	27		
<b>480V Ballast</b> (not available on 150W HPS)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (PSMH & 250W-400W HPS only) (150W HPS only)	T		
<b>Button Photocell</b> (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	

## FIELD-INSTALLED ACCESSORIES



DESCRIPTION	CATALOG NUMBER
 <b>Deep Baffle</b>	DB-14
 <b>Wire Guard</b>	FWG-14
 <b>Glare Shield</b>	GS-14
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

SEE PAGE 66 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## FORWARD THROW ECONOMY FLOOD

NSC Series fixtures provide narrow vertical and wide horizontal distribution in a compact housing size. The 14" Flood-Cutoff is typically installed with a 45- to 60-degree tilt angle. The optical system is designed with sharp cutoff to reduce glare for pedestrians and vehicular traffic. The 14-inch square fixture features a copper-free, die-cast aluminum housing and lens frame and is designed for easy installation and serviceability. A versatile lens frame makes this fixture suitable for downlighting and uplighting applications.

**APPLICATIONS:** Parking lots, facades, sign lighting and security applications



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	14"	NSC*615-M
250W PSMH	14"	NSC*625-M
320W PSMH	14"	NSC*632-M
400W PSMH	14"	NSC*640-M
150W HPS	14"	NSC*515-M
250W HPS	14"	NSC*525-M
400W HPS	14"	NSC*540-M

Reduced envelope lamp. ED28 for 320W and 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70





## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (PSMH only)	27		
<b>480V Ballast</b> (not available on 150W HPS)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (PSMH & 250W-400W HPS only) (150W HPS only)	T T		
<b>Button Photocell</b> (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
<b>Deep Baffle</b>	DB-14	
<b>Wire Guard</b>	FWG-14	
<b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

SEE PAGE 66 FOR MORE INFORMATION ABOUT THESE ACCESSORIES





## WIDE ECONOMY FLOOD

The NSW Series is designed to provide maximum side-to-side coverage. This fixture is typically installed from a 15- to 25-degree tilt above horizontal to prevent glare and ensure optimum performance. The 14-inch square floodlight features a copper-free, die-cast aluminum housing and lens frame and is designed for easy installation and serviceability. The versatile lens frame makes this fixture suitable for downlighting or uplighting applications.

**APPLICATIONS:** Roadway, parking areas, sign lighting and security applications

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	14"	NSW*615-M
250W PSMH	14"	NSW*625-M
320W PSMH 	14"	NSW*632-M
400W PSMH 	14"	NSW*640-M
150W HPS	14"	NSW*515-M
250W HPS	14"	NSW*525-M
400W HPS	14"	NSW*540-M

 Reduced envelope lamp. ED28 for 320W and 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX		
<b>277V Reactor Ballast</b> (PSMH only)	27			
<b>480V Ballast</b> (not available on 150W HPS)	5			
<b>Canada Tri-volt Ballast</b> (120/277/347V) (PSMH & 250W-400W HPS only) (150W HPS only)	T T			
<b>Button Photocell</b> (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P		
<b>External Photocell</b> For fixtures w/480V	5	P		

## FIELD-INSTALLED ACCESSORIES



DESCRIPTION	CATALOG NUMBER		
 <b>Deep Baffle</b>	DB-14		
 <b>Wire Guard</b>	FWG-14		
 <b>Glare Shield</b>	GS-14		
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6		

SEE PAGE 66 FOR MORE INFORMATION ABOUT THESE ACCESSORIES



# NS SERIES by RUUD LIGHTING DIRECT

## COMPACT ECONOMY FLOOD



The NS Series is designed to provide conventional floodlighting for a variety of surfaces and areas. The fixture features a compact, seamless, die-cast aluminum housing and a high impact, clear tempered and annealed glass lens. Complete silicone gasketing at lens and mounting provides a watertight seal.

**APPLICATIONS:** Facades, small sign lighting, and security applications

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
50W PSMH	9.8" x 6.3"	NS6405-D
70W PSMH	9.8" x 6.3"	NS6407-D
50W HPS (120V)	9.8" x 6.3"	NS6505-1
70W HPS (120V)	9.8" x 6.3"	NS6507-1
100W HPS (120V)	9.8" x 6.3"	NS6510-1
150W HPS (120V)	9.8" x 6.3"	NS6515-1
13W CFL	9.8" x 6.3"	NS6213-UL
26/32/42W CFL <sup>▲</sup>	9.8" x 6.3"	NS6242-UL



Back view of NS Series with supplied 1/2" Adjustable Fitter

**MOUNTING ALTERNATIVES START ON PAGE 70**

<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory if discrete wattage label is required to meet state and/or local regulations.



Adding a photocell eliminates IP Rating



for Wet Locations

## FACTORY-INSTALLED OPTIONS


DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>Dual-volt Ballast</b> (120/277V) (50W & 70W HPS only)	D	
<b>208V or 240V Ballast</b> (PSMH only) (50W & 70W HPS only)	3 or 4 3 or 4	
<b>Canada 347V Ballast</b> (PSMH only) (50W HPS only) (70W HPS only) (26W, 32W, 42W CFL only)	D to 6 D to 6 D to 6 UL to 6L	
<b>High Power Factor Ballast</b> (standard on CFL)		H
<b>Button Photocell</b> (n/a on 100W MH) (P=HID only, LP=CFL only) (120V, 277V, 208V, or 240V) (Canada 347V)	1, 2, 3, or 4 6	P or LP P or LP
<b>Tamperproof Lens Fasteners</b>		J

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Deep Baffle</b>	DB-9
<b>Wire Guard</b>	FWG-9
<b>Glare Shield</b>	GS-9
<b>Mounting Box</b>	MNB-1
<b>Mounting Box with Stake, Cord &amp; Plug</b>	MNB-2
<b>Conduit Slipfitter</b>	MNH-2
<b>Ground Mount Post</b>	PGM-1
<b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 66 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)

## SIGN UPLIGHT

The Sign Uplight is available in 12- or 16-inches square, this fixture features a die-cast aluminum, weather-tight housing. The precision specular reflector has a strong main beam of 67 degrees and exceptional lateral distribution to provide excellent uniformities from top to bottom and left to right. The optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** Mount 5-feet away and 2-feet below for optimum lighting of a 12ft. area. Mounting arm not included. **NOTE:** Consult factory if used as a downlight.

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MW*407-M
100W PSMH	12"	MW*410-M
150W PSMH	12"	MW*615-M
250W PSMH	16"	W*625-M
320W PSMH	16"	W*632-M
400W PSMH	16"	W*640-M
70W HPS	12"	MW*507-M
100W HPS	12"	MW*510-M
150W HPS	12"	MW*515-M
250W HPS	16"	W*525-M
400W HPS	16"	W*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**  
**MOUNTING ALTERNATIVES START ON PAGE 70**



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 250W & 400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W & 400W HPS only)	T	
(70W-150W HPS and 70W & 100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER
 <b>Wire Guard</b> 12" Housing 16" Housing	FWG-12 FWG-16
 <b>Glare Shield</b> 12" Housing 16" Housing	GS-12 GS-16
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## SQUARE STANDARD FLOODLIGHT

A general-purpose floodlight, the FS Series is available in three sizes, 12-, 16- and 22-inches square and features a die-cast aluminum, weather-tight housing. The diffused reflector is designed to provide conventional floodlighting for a variety of applications and mounting positions. Fixtures are typically installed with a 45- to 60-degree tilt above the horizon. The optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** Illuminating signs, large open areas, and facades



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MFS*407-M
100W PSMH	12"	MFS*410-M
150W PSMH	12"	MFS*615-M
250W PSMH	16"	FS*625-M
320W PSMH <sup>Ⓛ</sup>	16"	FS*632-M
400W PSMH	16"	FS*640-M
1000W MH	22"	FS*499-M
70W HPS	12"	MFS*507-M
100W HPS	12"	MFS*510-M
150W HPS	12"	MFS*515-M
250W HPS	16"	FS*525-M
400W HPS	16"	FS*540-M

<sup>Ⓛ</sup> Reduced envelope lamp. ED28 for 320W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**6** = 1/2" Adjustable Fitter (12" housing only)

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**

**MOUNTING ALTERNATIVES START ON PAGE 70**



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 250W & 400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 1000W MH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T	
	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V or 480V Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Uplight Lens Frame</b>		U
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4	P
	6	P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Deep Baffle</b> 12" Housing 16" Housing 22" Housing	DB-12 DB-16 DB-22
 <b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
 <b>Glare Shield</b> <sup>▲</sup> 12" Housing 16" Housing 22" Housing	GS-12 GS-16 GS-22
 <b>Polycarbonate Vandal Shield</b> <sup>▲▽</sup> 12" Housing 16" Housing 22" Housing	LS-12 LS-16 LS-22
 <b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6



<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together

<sup>▽</sup> n/a if fixture is used in an upright position

**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

# LFS SERIES by RUUD LIGHTING DIRECT

## RECTANGULAR STANDARD FLOODLIGHT



A general-purpose floodlight, the LFS Series is typically installed with a 45-to 60-degree tilt back from vertical to provide a wide coverage of illumination. Fixture features an aluminum die-cast housing, precise reflector system and tempered glass lens for optimized lighting performance. The optical chamber is sealed to reduce dirt and insect contamination, and allows fixture operation in any position.

**APPLICATIONS:** Ideal for lighting signs and facades as well as uplighting and downlighting applications

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LFS*407-M
100W PSMH	16.0" x 9.3"	LFS*410-M
150W PSMH	16.0" x 9.3"	LFS*615-M
70W HPS	16.0" x 9.3"	LFS*507-M
100W HPS	16.0" x 9.3"	LFS*510-M
150W HPS	16.0" x 9.3"	LFS*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (HPS only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER	
 <b>Deep Baffle</b>	DB-12	
 <b>Wire Guard</b>	FWG-L	
 <b>Glare Shield</b> ▲	GS-12	
 <b>Polycarbonate Vandal Shield</b> ▼	LS-L	
 <b>Ground Mount Post</b>	PGM-1	
 <b>Tamperproof Screwdriver</b>	TPS-1	
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

▲ Consult factory if using Glare Shield and Polycarbonate Vandal Shield together  
▼ n/a if fixture is used in an upright position

SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## SQUARE FORWARD THROW FLOODLIGHT



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

This forward throw fixture has an optical system specifically designed to assure maximum main beam projection, while minimizing spill light. It is generally positioned with a 15- to 25-degree tilt above horizontal to reduce glare and obtain optimum performance. The fixture features an aluminum die-cast, weather-tight housing.

**APPLICATIONS:** Parking lots, auto sales lots and outdoor sports areas

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MCF*407-M
100W PSMH	12"	MCF*410-M
150W PSMH	12"	MCF*615-M
250W PSMH	16"	CF*625-M
320W PSMH <sup>⚡</sup>	16"	CF*632-M
400W PSMH	16"	CF*640-M
750W PSMH	22"	CF*675-M
1000W MH	22"	CF*499-M
70W HPS	12"	MCF*507-M
100W HPS	12"	MCF*510-M
150W HPS	12"	MCF*515-M
250W HPS	16"	CF*525-M
400W HPS	16"	CF*540-M

<sup>⚡</sup> Reduced envelope lamp. ED28 for 320W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**5** = 20° Fixed Mount

**6** = 1/2" Adjustable Fitter (12" housing only)

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-750W PSMH, 1000W MH, 250W-400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-750W PSMH, 1000W MH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Uplight Lens Frame</b>		U
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V For fixtures w/480V	1 5	P P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
<b>Backlight Shield</b> 12" Housing 16" Housing 22" Housing	SBL-12 SBL-16 SBL-22
<b>Polycarbonate Vandal Shield<sup>▲</sup></b> 12" Housing 16" Housing 22" Housing	LS-12 LS-16 LS-22
<b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6


<sup>▲</sup> n/a if fixture is used in an upright position

SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## RECTANGULAR FORWARD THROW FLOODLIGHT

This forward throw luminaire has an optical system specifically designed to assure maximum main beam projection, while minimizing spill light. The fixture features an aluminum die-cast housing, precise reflector system, and tempered glass lens. It is generally positioned with a 20-degree tilt above horizontal to reduce glare and obtain maximum performance. The optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** Ideal for small parking areas and building-mounted security lighting



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LCF*407-M
100W PSMH	16.0" x 9.3"	LCF*410-M
150W PSMH	16.0" x 9.3"	LCF*615-M
70W HPS	16.0" x 9.3"	LCF*507-M
100W HPS	16.0" x 9.3"	LCF*510-M
150W HPS	16.0" x 9.3"	LCF*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (HPS only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W-100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
 <b>Wire Guard</b>	FWG-L	
 <b>Polycarbonate Vandal Shield<sup>▲</sup></b>	LS-L	
 <b>Ground Mount Post</b>	PGM-1	
 <b>Tamperproof Screwdriver</b>	TPS-1	
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

<sup>▲</sup> n/a if fixture is used in an upright position


SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES



## SQUARE SPOTLIGHT


The Square Spotlight features a smooth diffuse reflector providing an intermediate distribution. The fixture features an aluminum die-cast, weather-tight housing and a sealed optical chamber reduces dirt and insect contamination.

**APPLICATIONS:** Illuminating tall, narrow subjects such as flagpoles, steeples, columns, and signs



NEMA TYPE 4x4

SHOWN WITH OPTIONAL UPLIGHT LENS



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MPM*407-M
100W PSMH	12"	MPM*410-M
150W PSMH	12"	MPM*615-M
250W PSMH	16"	PM*625-M
320W PSMH <sup>⚡</sup>	16"	PM*632-M
400W PSMH <sup>⚡</sup>	16"	PM*640-M
1000W MH	22"	PM*499-M
70W HPS	12"	MPM*507-M
100W HPS	12"	MPM*510-M
150W HPS	12"	MPM*515-M
250W HPS	16"	PM*525-M
400W HPS	16"	PM*540-M

<sup>⚡</sup> Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**6** = 1/2" Adjustable Fitter (12" housing only)

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 1000W MH, 250W-400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 1000W MH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Uplight Lens Frame</b>		U
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Deep Baffle</b> 12" Housing 16" Housing 22" Housing	DB-12 DB-16 DB-22
<b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
<b>Glare Shield<sup>▲</sup></b> 12" Housing 16" Housing 22" Housing	GS-12 GS-16 GS-22
<b>Polycarbonate Vandal Shield<sup>▲▼</sup></b> 12" Housing 16" Housing 22" Housing	LS-12 LS-16 LS-22
<b>Internal Louver</b> 12" Housing 16" Housing 22" Housing	DL-12 DL-16 not available
<b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together



<sup>▼</sup> n/a if fixture is used in an upright position

SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## RECTANGULAR SQUARE SPOTLIGHT

The Rectangular Spotlight has a smooth aluminum diffuse reflector providing an intermediate distribution. The housing is constructed of die-cast aluminum and the optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** For illuminating tall, narrow subjects such as flagpoles and steeples



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LPM*407-M
100W PSMH	16.0" x 9.3"	LPM*410-M
150W PSMH	16.0" x 9.3"	LPM*615-M
70W HPS	16.0" x 9.3"	LPM*507-M
100W HPS	16.0" x 9.3"	LPM*510-M
150W HPS	16.0" x 9.3"	LPM*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (HPS only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W-100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
 <b>Deep Baffle</b>	DB-12	
 <b>Wire Guard</b>	FWG-L	
 <b>Glare Shield</b> <sup>▲</sup>	GS-12	
 <b>Polycarbonate Vandal Shield</b> <sup>▲▼</sup>	LS-L	
 <b>Internal Louver</b>	DL-L	
 <b>Ground Mount Post</b>	PGM-1	
 <b>Tamperproof Screwdriver</b>	TPS-1	
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together  
<sup>▼</sup> n/a if fixture is used in an upright position

SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## SQUARE NARROW SPOTLIGHT




The Square Narrow Spotlight features a smooth, bright, anodized reflector, providing a precise distribution. The fixture features an aluminum die-cast, weather-tight housing and a sealed optical chamber to reduce dirt and insect contamination.

**APPLICATIONS:** Illuminating tall, narrow subjects such as flagpoles, steeples, columns, and signs



SHOWN WITH OPTIONAL UPLIGHT LENS



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MPN*407-M
100W PSMH	12"	MPN*410-M
150W PSMH	12"	MPN*615-M
250W PSMH	16"	PN*625-M
320W PSMH <sup>Ⓢ</sup>	16"	PN*632-M
400W PSMH <sup>Ⓢ</sup>	16"	PN*640-M
1000W MH	22"	PN*499-M
70W HPS	12"	MPN*507-M
100W HPS	12"	MPN*510-M
150W HPS	12"	MPN*515-M
250W HPS	16"	PN*525-M
400W HPS	16"	PN*540-M

<sup>Ⓢ</sup> Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**6** = 1/2" Adjustable Fitter (12" housing only)

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 1000W MH, 250W-400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 1000W MH, 250W-400W HPS)	T	
(70W-150W HPS and 70W & 100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Uplight Lens Frame</b>		U
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES



DESCRIPTION	CATALOG NUMBER
<b>Deep Baffle</b> 12" Housing 16" Housing 22" Housing	DB-12 DB-16 DB-22
<b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
<b>Glare Shield<sup>▲</sup></b> 12" Housing 16" Housing 22" Housing	GS-12 GS-16 GS-22
<b>Polycarbonate Vandal Shield<sup>▲▽</sup></b> 12" Housing 16" Housing 22" Housing	LS-12 LS-16 LS-22
<b>Internal Louver</b> 12" Housing 16" Housing 22" Housing	DL-12 DL-16 not available
<b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together  
<sup>▽</sup> n/a if fixture is used in an uplight position

SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## RECTANGULAR NARROW SPOTLIGHT



The optics for the Rectangular Narrow Spotlight feature a smooth, bright reflector, providing a precise distribution. The housing is constructed of die-cast aluminum and the optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** For illuminating tall, narrow subjects such as flagpoles and steeples

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LPN*407-M
100W PSMH	16.0" x 9.3"	LPN*410-M
150W PSMH	16.0" x 9.3"	LPN*615-M
70W HPS	16.0" x 9.3"	LPN*507-M
100W HPS	16.0" x 9.3"	LPN*510-M
150W HPS	16.0" x 9.3"	LPN*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (HPS only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W-100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
 <b>Deep Baffle</b>	DB-12	
 <b>Wire Guard</b>	FWG-L	
 <b>Glare Shield</b> <sup>▲</sup>	GS-12	
 <b>Polycarbonate Vandal Shield</b> <sup>▲▼</sup>	LS-L	
 <b>Internal Louver</b>	DL-L	
 <b>Ground Mount Post</b>	PGM-1	
 <b>Tamperproof Screwdriver</b>	TPS-1	
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together  
<sup>▼</sup> n/a if fixture is used in an upright position

SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## SQUARE WIDE THROW AREA LIGHT



The 12-inch and 16-inch housings of the Wide Throw Area Light have a Type III asymmetric distribution pattern. The 22-inch aluminum die-cast housing has Type II asymmetric distribution. The precise reflector system provides wide side-to-side and moderate front distribution.

**APPLICATIONS:** Roadway, parking areas or for building-mounted security lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MPR*407-M
100W PSMH	12"	MPR*410-M
150W PSMH	12"	MPR*615-M
250W PSMH	16"	PR*625-M
320W PSMH	16"	PR*632-M
400W PSMH	16"	PR*640-M
750W PSMH	22"	PR*675-M
1000W MH	22"	PR*499-M
70W HPS	12"	MPR*507-M
100W HPS	12"	MPR*510-M
150W HPS	12"	MPR*515-M
250W HPS	16"	PR*525-M
400W HPS	16"	PR*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number




- 1** = 1-1/2" Close Pole Mount
- 2** = 6" Extended Pole Mount
- 3** = 2" Adjustable Fitter
- 4** = Yoke Mount
- 6** = 1/2" Adjustable Fitter (12" housing only)
- 8** = No Mounting Hardware (factory-drilled with 2-foot cord)
- K** = Round Tube Off-Center Tenon (16" housing only) (Fits up to 3" O.D.)
- M** = Round Tube Off-Center Tenon (16" housing only) (Direct fitter for 4" sq. pole)
- W** = Wall Mount (Backlight Shield is standard)

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**

**MOUNTING ALTERNATIVES START ON PAGE 70**

Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-750W PSMH, 1000W MH, 250W-400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-750W PSMH, 1000W MH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T	
	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
<b>Backlight Shield</b> <sup>▲</sup> 12" Housing 16" Housing 22" Housing	SBL-12 SBL-16 SBL-22
<b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

<sup>▲</sup> Standard on Wall Mount, mounting code "W"

**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)


## RECTANGULAR WIDE THROW AREA LIGHT

The Wide Throw Area Light reflector provides wide side-to-side and moderate front distribution with a Type III asymmetric distribution pattern. The housing is constructed of die-cast aluminum and the optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** For illuminating small parking lots and building mounted security lighting



Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LPR*407-M
100W PSMH	16.0" x 9.3"	LPR*410-M
150W PSMH	16.0" x 9.3"	LPR*615-M
70W HPS	16.0" x 9.3"	LPR*507-M
100W HPS	16.0" x 9.3"	LPR*510-M
150W HPS	16.0" x 9.3"	LPR*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

**W** = Wall Mount

SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (HPS only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W-100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER	
<b>Wire Guard</b>	FWG-L	
<b>Glare Shield</b> <sup>▲</sup>	GS-12	
<b>Polycarbonate Vandal Shield</b> <sup>▲▼</sup>	LS-L	
<b>Backlight Shield</b> (standard on Wall Mount)	SBL-L	
<b>Tamperproof Screwdriver</b>	TPS-1	
<b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6	

<sup>▲</sup> Consult factory if using Glare Shield and Polycarbonate Vandal Shield together  
<sup>▼</sup> n/a if fixture is used in an uplight position

SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES






# AVH3 SERIES by **RUUD LIGHTING DIRECT**

## HORIZONTAL-LAMP WIDE THROW AVIATOR®

This distinctive full cutoff fixture combines a horizontal lamp and features a segmented reflector designed to provide excellent side-to-side distribution. The housing and door frame are constructed from die-cast aluminum and features a high impact, strength-tempered glass lens. The no-leak silicone gasket assures a lifetime seal.

**APPLICATIONS:** Roadway, parking areas or for building-mounted security lighting



"A"	"B"
14.4" (366 mm)	6.3" (160 mm)
18.5" (470 mm)	7.9" (201 mm)
"C"	"D"
15.5" (393 mm)	20.9" (532 mm)
19.6" (498 mm)	26.5" (674 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	14.4" x 15.5"	MAVH30407-M
100W PSMH	14.4" x 15.5"	MAVH30410-M
150W PSMH	14.4" x 15.5"	MAVH30615-M
250W PSMH	18.5" x 19.6"	AVH30625-M
320W PSMH	18.5" x 19.6"	AVH30632-M
400W PSMH	18.5" x 19.6"	AVH30640-M
70W HPS	14.4" x 15.5"	MAVH30507-M
100W HPS	14.4" x 15.5"	MAVH30510-M
150W HPS	14.4" x 15.5"	MAVH30515-M
250W HPS	18.5" x 19.6"	AVH30525-M
400W HPS	18.5" x 19.6"	AVH30540-M

MOUNTING ALTERNATIVES START ON PAGE 70

Reduced envelope lamp. ED28 for 320W & 400W PSMH.



### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 250W & 400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> (For fixtures w/480V)	5	P

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Extended Arm</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	AVE-1 AVE-2
<b>Upsweep Extended Arm</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	AVU-1 AVU-2
<b>Round Pole Adaptor</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing (fits round poles 3" to 6" in diameter)	AVRP-1 AVRP-2
<b>Backlight Shield</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	SBL-AV1 SBL-AV2

SEE PAGE 69 FOR MORE INFORMATION ABOUT THESE ACCESSORIES



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# AVV3 SERIES by RUUD LIGHTING DIRECT

## VERTICAL-LAMP WIDE THROW AERODOME®

The AeroDome is a stylish fixture that features a high-impact, clear tempered glass lens, reflectors made of premium-grade pre-finished aluminum, and a rugged, die-cast housing. The AVV3 Series delivers excellent photometric performance, higher footcandle averages, and improved uniformity. The AVV3 Series provides an IES Type III Full Cutoff distribution with a vertical lamp position that provides excellent performance.

**APPLICATIONS:** Roadway and parking areas

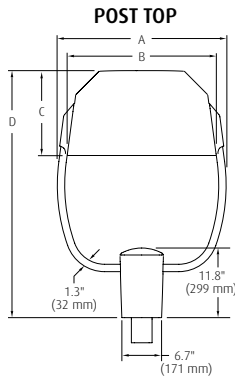

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	20"	AVV3*615-M
250W PSMH	20"	AVV3*625-M
320W PSMH	20"	AVV3*632-M
400W PSMH	20"	AVV3*640-M
750W PSMH	25"	AVV3*675-M
1000W PSMH	25"	AVV3*699-M
1000W MH	25"	AVV3*499-M
150W HPS	20"	AVV3*515-M
250W HPS	20"	AVV3*525-M
400W HPS	20"	AVV3*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**O, L, R** **F, H, I, J**

**O** = Side-Arm Mount

**L** = Side-Arm Mount (optic rotated)

**R** = Side-Arm Mount (optic rotated)

**F** = Round Tube Center Tenon

**H** = Round Tube Center 4" Square Pole

**I** = Round Tube Center 5" Square Pole


**J** = Round Tube Center 6" Square Pole

**MOUNTING ALTERNATIVES START ON PAGE 70**

HOUSING	"A"	"B"	"C"	"D"	"E"	"F"	"G"
20" (501 mm)	23.0" (585 mm)	20.0" (501 mm)	11.8" (300 mm)	36.0" (913 mm)	12.0" (305 mm)	20.0" (501 mm)	28.8" (733 mm)
25" (635 mm)	28.6" (726 mm)	25.0" (635 mm)	14.4" (366 mm)	41.8" (1062 mm)	14.5" (368 mm)	25.0" (635 mm)	36.7" (931 mm)

### ROTATABLE OPTICS

AeroDome Type III optics can be rotated 90 degrees to meet site light distribution requirements while retaining the visual orientation of the AeroDome housing and pole. Rotatable optics are factory set or field rotatable on the Side-Arm Mount and field rotatable in the Round Tube Center Post-Top Mount.

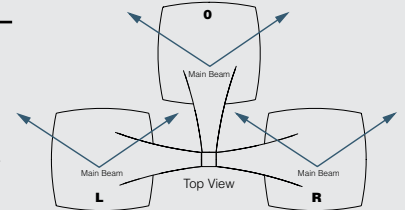

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (150W HPS)	5	
(PSMH, 1000W MH, 250W-400W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W HPS)	T	
(150W-1000W PSMH, 1000W MH, 250W-400W HPS)	T	
<b>Single Fuse</b> (n/a with Post-Top fixtures) (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (n/a with Post-Top fixtures) (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V For fixtures w/480V	1 5	P P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Full Cutoff External Backlight Shield</b> <sup>▲</sup> 20" Housing 25" Housing	SBL-AVV20CBZ SBL-AVV25CBZ
<b>External Backlight Shield</b> <sup>▼</sup> 20" Housing 25" Housing	SBL-AVV20EBZ SBL-AVV25EBZ
<b>Round Pole Adaptor</b> (fits round poles 4" to 6" in diameter)	AVRP-3


<sup>▲</sup> Full Cutoff External Backlight Shield includes the External Backlight Shield

<sup>▼</sup> For backlight cutoff. To maintain "full cutoff" order Full Cutoff External Backlight Shield.


**SEE PAGE 69 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## SQUARE VERTICAL-LAMP WIDE THROW AREA LIGHT



Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY

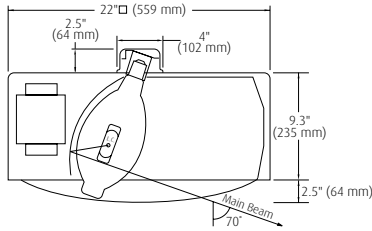

4" square x 2.5" H (102 mm x 64 mm) cast aluminum, gasketed box supplied on 1000W MH and 250W - 400W HPS fixtures.

The VPR Series fixture features a 70-degree main beam. Inside the die-cast aluminum housing, the lamp is tilted 20 degrees from vertical toward the house-side of the fixture. This fixture provides low nadir candlepower and great lateral distribution. 250W through 400W fixtures feature an acrylic sag lens; 750W and 1000W fixtures feature a glass sag lens.

**APPLICATIONS:** Wide roadway areas, large parking areas

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
250W PSMH	22"	VPR*6925-M
320W PSMH $\Phi$	22"	VPR*6932-M
400W PSMH $\Phi$	22"	VPR*6940-M
750W PSMH	22"	VPR*675-M
1000W PSMH $\Phi$	22"	VPR*699-M
1000W MH $\Phi$	22"	VPR*499-M
250W HPS	22"	VPR*592-M
400W HPS	22"	VPR*594-M

$\Phi$  Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**2** = 6" Extended Pole Mount

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

**W** = Wall Mount

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**



**MOUNTING ALTERNATIVES START ON PAGE 70**



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (250W-400W PSMH only)	27	
<b>480V Ballast</b>	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V For fixtures w/480V	1 5	P P

## FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER
 <b>Cutoff Baffle</b>	CSF-22
 <b>Backlight Shield</b>	SBL-22

**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## WEDGE WIDE THROW AREA LIGHT

Available in 16-inch or 22-inch square, the distinctive architectural styling of WPR Series fixtures offers an estimated 50% lower EPA values than typical shoebox housings. Fixtures feature a clear, tempered glass lens mounted securely in the recessed die-cast door frame. WPR Series fixtures use a parking/roadway reflector with Type III asymmetric distribution.


**APPLICATIONS:** Roadway, parking areas or for building-mounted security lighting

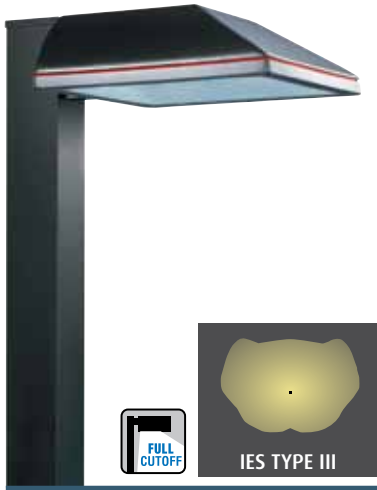

IES TYPE III

**STANDARD IN BLACK  
SHOWN WITH OPTIONAL ACCENT STRIPE**

Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



"A"	"B"	"C"
16" Square (406 mm)	9.5" (241 mm)	5.1" (129 mm)
22" Square (559 mm)	13.4" (340 mm)	6.5" (165 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
100W PSMH	16"	WPR*410-M
150W PSMH	16"	WPR*615-M
250W PSMH	22"	WPR*6925-M
320W PSMH	22"	WPR*6932-M
400W PSMH	22"	WPR*6940-M
100W HPS	16"	WPR*510-M
150W HPS	16"	WPR*515-M
250W HPS	22"	WPR*592-M
400W HPS	22"	WPR*594-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**2** = 6" Extended Pole Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

**W** = Wall Mount

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS  
MOUNTING ALTERNATIVES START ON PAGE 70**



Rating applies as  
a downlight only



for Wet  
Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W PSMH only)	5		
(150W-400W PSMH, 250W & 400W HPS only)	5		
(70W-100W HPS only)	5		
(150W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W-400W HPS only)	T		
(100W & 150W HPS and 100W PSMH only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q	
<b>Button Photocell</b> (n/a on 480V) (277V Reactor, 120V, 277V, 208V, or 240V)	27, 1, 2, 3, or 4	P	
(Canada 347V)	6	P	
<b>External Photocell</b> (480V only)	5	P	


**Accent Stripe** (note at end of catalog number prefix: G=Grey, R=Red (WPR1615R-M))

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Wire Guard</b> 16" Housing 22" Housing	FWG-16 FWG-22
<b>Backlight Shield</b> 16" Housing 22" Housing	SBL-16 SBL-22


**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## SQUARE FORWARD THROW AREA LIGHT



† Actual IES Type III

Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

This compact forward-throw reflector has a main beam of 60+ degrees from vertical (30 degrees from horizontal), providing wide lateral distribution and excellent uniformities. The housing is aluminum die-cast. A backlight shield accessory (standard on wall mount) permits precise cutoff adjustability.

**APPLICATIONS:** Parking lots and area lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MAC*407-M
100W PSMH	12"	MAC*410-M
150W PSMH	12"	MAC*615-M
250W PSMH	16"	AC*625-M
320W PSMH	16"	AC*632-M
400W PSMH	16"	AC*640-M
750W PSMH	22"	AC*675-M
70W HPS	12"	MAC*507-M
100W HPS	12"	MAC*510-M
150W HPS	12"	MAC*515-M
250W HPS	16"	AC*525-M
400W HPS	16"	AC*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



- 1** = 1-1/2" Close Pole Mount
- 2** = 6" Extended Pole Mount
- 3** = 2" Adjustable Fitter
- 4** = Yoke Mount
- 6** = 1/2" Adjustable Fitter (12" housing only)
- 8** = No Mounting Hardware (factory-drilled with 2-foot cord)
- K** = Round Tube Off-Center Tenon (16" housing only) (Fits up to 3" O.D.)
- M** = Round Tube Off-Center Tenon (16" housing only) (Direct fitter for 4" sq. pole)
- W** = Wall Mount (Backlight Shield is standard)

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 250W & 400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-750W PSMH, 250W-400W HPS)	T	
(70W-150W HPS and 70W & 100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (n/a 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V For fixtures w/480V	1 5	P P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
<b>Backlight Shield</b> <sup>▲</sup> 12" Housing 16" Housing 22" Housing	SBL-12 SBL-16 SBL-22
<b>Button Photocell</b> (for 2" fitter) 120V (n/a 1000W) 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

<sup>▲</sup> standard on Wall Mount, mounting code "W"


SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## RECTANGULAR FORWARD THROW AREA LIGHT


This compact forward-throw reflector has a main beam of 60+ degrees from vertical (30 degrees from horizontal), providing wide lateral distribution and improved uniformities. The backlight shield accessory (standard on wall mount) permits precise cutoff adjustability. The housing is constructed of die-cast aluminum and the optical chamber is sealed to reduce dirt and insect contamination.

**APPLICATIONS:** For illuminating small parking lots and building mounted security lighting



† Actual IES Type III

Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LAC*407-M
100W PSMH	16.0" x 9.3"	LAC*410-M
150W PSMH	16.0" x 9.3"	LAC*615-M
70W HPS	16.0" x 9.3"	LAC*507-M
100W HPS	16.0" x 9.3"	LAC*510-M
150W HPS	16.0" x 9.3"	LAC*515-M

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**3** = 2" Adjustable Fitter

**4** = Yoke Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

**W** = Wall Mount

SEE PAGE 65 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS

MOUNTING ALTERNATIVES START ON PAGE 70

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>120V Reactor Ballast</b> (70W-150W HPS, only)	1		
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W-100W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH & 70W-100W HPS only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a on 480V) (factory-installed except in 2" adjustable fitter) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/480V	5	P	
<b>Tamperproof Lens Fasteners</b>		J	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Wire Guard</b>	FWG-L
 <b>Polycarbonate Vandal Shield<sup>▲</sup></b>	LS-L
 <b>Backlight Shield<sup>▼</sup></b>	SBL-L
 <b>Tamperproof Screwdriver</b>	TPS-1
 <b>Button Photocell</b> (for 2" fitter) 120V 208V, 240V or 277V Canada 347V	PC-1 PC-2 PC*6

<sup>▲</sup> n/a if fixture is used in an uplight position

<sup>▼</sup> standard on Wall Mount, mounting code "W"


SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES





## HORIZONTAL-LAMP FORWARD THROW AVIATOR®

This distinctive full cutoff fixture combines a horizontal lamp and features a segmented reflector designed to provide forward throw and substantial lateral distribution. The housing and door frame are constructed from die-cast aluminum and features a high impact, strength-tempered glass lens. The no-leak silicone gasket assures a lifetime seal.

**APPLICATIONS:** Parking lots



† Actual IES Type III



"A"	"B"
14.4" (366 mm)	6.3" (160 mm)
18.5" (470 mm)	7.9" (201 mm)
"C"	"D"
15.5" (393 mm)	20.9" (532 mm)
19.6" (498 mm)	26.5" (674 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	14.4" x 15.5"	MAVH40407-M
100W PSMH	14.4" x 15.5"	MAVH40410-M
150W PSMH	14.4" x 15.5"	MAVH40615-M
250W PSMH	18.5" x 19.6"	AVH40625-M
320W PSMH	18.5" x 19.6"	AVH40632-M
400W PSMH	18.5" x 19.6"	AVH40640-M
70W HPS	14.4" x 15.5"	MAVH40507-M
100W HPS	14.4" x 15.5"	MAVH40510-M
150W HPS	14.4" x 15.5"	MAVH40515-M
250W HPS	18.5" x 19.6"	AVH40525-M
400W HPS	18.5" x 19.6"	AVH40540-M

MOUNTING ALTERNATIVES START ON PAGE 70

Reduced envelope lamp. ED28 for 320W & 400W PSMH.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W PSMH only)	5		
(150W-400W PSMH, 250W & 400W HPS only)	5		
(70W-100W HPS only)	5		
(150W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W-400W HPS) (70W-150W HPS and 70W & 100W PSMH only)	T		
	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q	
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> (For fixtures w/480V)	5	P	

## FIELD-INSTALLED ACCESSORIES




DESCRIPTION	CATALOG NUMBER
<b>Extended Arm</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	AVE-1 AVE-2
<b>Upsweep Extended Arm</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	AVU-1 AVU-2
<b>Round Pole Adaptor</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing (fits round poles 3" to 6" in diameter)	AVRP-1 AVRP-2
<b>Backlight Shield</b> 14.4" x 15.5" Housing 18.5" x 19.6" Housing	SBL-AV1 SBL-AV2

SEE PAGE 69 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

## VERTICAL-LAMP FORWARD THROW AERODOME®

The Forward Throw AeroDome is a stylish fixture that features a high-impact, clear tempered glass lens, reflectors made of premium-grade pre-finished aluminum, and a rugged, die-cast housing. The AVV4 Series delivers excellent photometric performance, higher footcandle averages, and improved uniformity. The AVV4 Series has a main beam of 67.5 degrees and provides IES Type IV distribution.

**APPLICATIONS:** Parking lots, auto sales lots and tennis courts

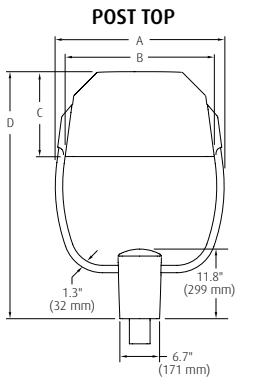

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	20"	AVV4*615-M
250W PSMH	20"	AVV4*625-M
320W PSMH	20"	AVV4*632-M
400W PSMH	20"	AVV4*640-M
750W PSMH	25"	AVV4*675-M
1000W PSMH	25"	AVV4*699-M
1000W MH	25"	AVV4*499-M
150W HPS	20"	AVV4*515-M
250W HPS	20"	AVV4*525-M
400W HPS	20"	AVV4*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**O, L, R** **F, H, I, J**

**O** = Side-Arm Mount

**L** = Side-Arm Mount (optic rotated)

**R** = Side-Arm Mount (optic rotated)

**F** = Round Tube Center Tenon

**H** = Round Tube Center 4" Square Pole

**I** = Round Tube Center 5" Square Pole


**J** = Round Tube Center 6" Square Pole

**MOUNTING ALTERNATIVES START ON PAGE 70**

HOUSING	"A"	"B"	"C"	"D"	"E"	"F"	"G"
20" (501 mm)	23.0" (585 mm)	20.0" (501 mm)	11.8" (300 mm)	36.0" (913 mm)	12.0" (305 mm)	20.0" (501 mm)	28.8" (733 mm)
25" (635 mm)	28.6" (726 mm)	25.0" (635 mm)	14.4" (366 mm)	41.8" (1062 mm)	14.5" (368 mm)	25.0" (635 mm)	36.7" (931 mm)

### ROTATABLE OPTICS

AeroDome Type IV optics can be rotated 90 degrees to meet site light distribution requirements while retaining the visual orientation of the AeroDome housing and pole. Rotatable optics are factory set or field rotatable on the Side-Arm Mount and field rotatable in the Round Tube Center Post-Top Mount.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (150W HPS)	5	
(PSMH, 1000W MH, 250W-400W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W HPS)	T	
(PSMH, 1000W MH, 250W-400W HPS only)	T	
<b>Single Fuse</b> (n/a with Post-Top fixtures) (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (n/a with Post-Top fixtures) (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P


## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Full Cutoff External Backlight Shield<sup>▲</sup></b> 20" Housing 25" Housing	SBL-AVV20CBZ SBL-AVV25CBZ
<b>External Backlight Shield<sup>▼</sup></b> 20" Housing 25" Housing	SBL-AVV20EBZ SBL-AVV25EBZ
<b>Round Pole Adaptor</b> (fits round poles 4" to 6" in diameter)	AVRP-3


<sup>▲</sup> Full Cutoff External Backlight Shield includes the External Backlight Shield accessory  
<sup>▼</sup> For backlight cutoff. To maintain "full cutoff" order Full Cutoff External Backlight Shield.

**SEE PAGE 69 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## SQUARE VERTICAL-LAMP FORWARD THROW AREA LIGHT



Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY

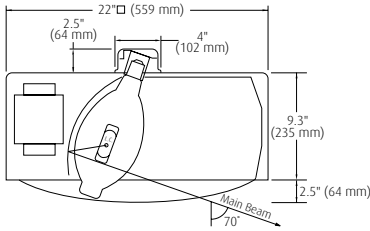

4" square x 2.5" H (102 mm x 64 mm) cast aluminum, gasketed box supplied on 1000W MH and 250W - 400W HPS fixtures.

The VFT Series fixture features a 70-degree main beam. Inside the die-cast aluminum housing, the lamp is tilted 20 degrees from vertical toward the house-side of the fixture. The VFT provides low nadir candlepower and great forward and lateral distribution. 250W through 400W fixtures feature an acrylic sag lens; 750W and 1000W fixtures feature a glass sag lens.

**APPLICATIONS:** Wide roadways areas and large parking areas

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
250W PSMH	22"	VFT*6925-M
320W PSMH	22"	VFT*6932-M
400W PSMH	22"	VFT*6940-M
750W PSMH	22"	VFT*675-M
1000W PSMH	22"	VFT*699-M
1000W MH	22"	VFT*499-M
250W HPS	22"	VFT*592-M
400W HPS	22"	VFT*594-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**2** = 6" Extended Pole Mount

**8** = No Mounting Hardware (factory-drilled with 2-foot cord)

**W** = Wall Mount

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**

**MOUNTING ALTERNATIVES START ON PAGE 70**



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (250W-400W PSMH only)	27		
<b>480V Ballast</b>	5		
<b>Tri-volt Ballast</b> (120/277/347V)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)			Q
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P	P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P	
For fixtures w/480V	5	P	

## FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER
<b>Cutoff Baffle</b>	CSF-22
<b>Backlight Shield</b>	SBL-22

**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## WEDGE FORWARD THROW AREA LIGHT

Available in 16-inch or 22-inch square, the distinctive architectural styling of WPR Series fixtures offers an estimated 50% lower EPA values than typical shoebox housings. Fixtures feature a clear, tempered glass lens mounted securely in the recessed die-cast door frame. WAC Series fixtures use a forward throw area cutoff reflector with a main beam of 60+ degrees from vertical providing great lateral distribution and uniformity.

**APPLICATIONS:** Parking areas

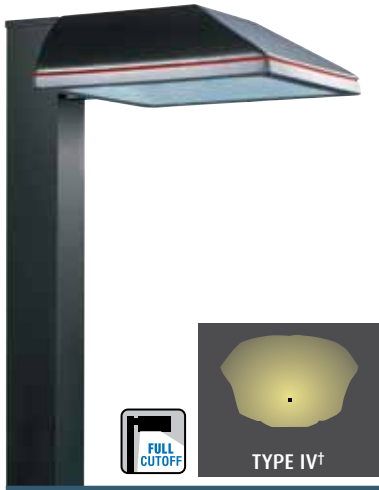


TYPE IV†

† Actual IES Type III

**STANDARD IN BLACK  
SHOWN WITH OPTIONAL ACCENT STRIPE**

Minimum 150°C Supply Conductors  
Required for Wall Mount.  
NON COMBUSTIBLE SURFACE ONLY



"A"	"B"	"C"
16" Square (406 mm)	9.5" (241 mm)	5.1" (129 mm)
22" Square (559 mm)	13.4" (340 mm)	6.5" (165 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
100W PSMH	16"	WAC*410-M
150W PSMH	16"	WAC*615-M
250W PSMH	22"	WAC*6925-M
320W PSMH	22"	WAC*6932-M
400W PSMH	22"	WAC*6940-M
100W HPS	16"	WAC*510-M
150W HPS	16"	WAC*515-M
250W HPS	22"	WAC*592-M
400W HPS	22"	WAC*594-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**1** = 1-1/2" Close Pole Mount

**2** = 6" Extended Pole Mount

**8** = No Mounting Hardware  
(factory-drilled with 2-foot cord)

**W** = Wall Mount

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 68 FOR MORE INFORMATION  
ABOUT THESE MOUNTINGS  
MOUNTING ALTERNATIVES START ON PAGE 70**



Rating applies as  
a downlight only



for Wet  
Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W PSMH only)	5		
(150W-400W PSMH, 250W & 400W HPS only)	5		
(70W-100W HPS only)	5		
(150W HPS only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W-400W HPS only)	T		
(100W & 150W HPS and 100W PSMH only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q	
<b>Button Photocell</b> (n/a on 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> (480V only)	5	P	

**Accent Stripe** (note at end of catalog number prefix: G=Grey, R=Red (WAC1615R-M))

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Wire Guard</b> 16" Housing 22" Housing	FWG-16 FWG-22
<b>Backlight Shield<sup>▲</sup></b> 16" Housing 22" Housing	SBL-16 SBL-22



<sup>▲</sup> standard on Wall Mount, mounting code "W"

**SEE PAGE 67 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

## SQUARE VERTICAL-LAMP SYMMETRIC POST TOP LIGHT

The QV Series, for 70-to 150-watt medium base lamps and 250- to 1000-watt mogul-base lamps, provides quadrate distribution resulting in great uniformity and optimum pole spacing. The housing is constructed of die-cast aluminum and the optical chamber is sealed to reduce dirt contamination. **NOTE:** All 22-inch fixtures have a sag lens. Order CSF-22 Cutoff Baffle accessory to maintain full cutoff.

**APPLICATIONS:** Parking lots and area lighting



"A"	"B"
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16"	QV*407-M
100W PSMH	16"	QV*410-M
150W PSMH	16"	QV*615-M
250W PSMH	22"	QV*6925-M
320W PSMH	22"	QV*6932-M
400W PSMH	22"	QV*6940-M
750W PSMH	22"	QV*675-M
1000W PSMH	22"	QV*699-M
1000W MH	22"	QV*499-M
70W HPS	16"	QV*507-M
100W HPS	16"	QV*510-M
250W HPS	22"	QV*592-M
400W HPS	22"	QV*594-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

### MOUNTING CODES

Insert Code at \* in Catalog Number



**A** = Center Tenon Mount – Square Tube  
(For 2-3/8" up to 3" O.D.)

**C** = 4" Center Direct Mount – Square Tube

**D** = 5" Center Direct Mount – Square Tube  
(22" housing only)

**E** = 6" Center Direct Mount – Square Tube  
(22" housing only)

**F** = Center Tenon Mount – Round Tube  
(16" housing only, for 2-3/8" up to 3" O.D.)

**H** = 4" Center Direct Mount – Round Tube  
(16" housing only)

**1** = 1-1/2" Close Pole Mount

**2** = 6" Extended Pole Mount

**NOTE:** When using multiple 22" sq. housings at a 90° configuration, a special 12" arm is required; see page 71.

**SEE PAGE 65 FOR MORE INFORMATION ABOUT THESE MOUNTINGS**

**MOUNTING ALTERNATIVES START ON PAGE 70**



22" fixtures are IP54



for Wet Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-1000W PSMH, 1000W MH, 250W-400W HPS)	5	
(70W-100W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-1000W PSMH, 1000W MH, 250W-400W HPS)	T	
(70W-100W HPS and 70W-100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V)	27, 1, 2, 3, or 4	P
(Canada 347V)	6	P
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Cutoff Baffle</b> 16" Housing 22" Housing	not available CSF-22
<b>Wire Guard</b> 16" Housing 22" Housing	FWG-16 not available




**SEE PAGE 68 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## VERTICAL-LAMP SYMMETRIC AERODOME®

The Symmetric AeroDome is a stylish fixture that features a high-impact, clear tempered glass lens, reflectors made of premium-grade pre-finished aluminum, and a rugged, die-cast housing. The AVV5 Series delivers excellent photometric performance and improved uniformity with an IES Type V distribution.

**APPLICATIONS:** Parking and area lighting



### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
150W PSMH	20"	AVV5*615-M
250W PSMH	20"	AVV5*625-M
320W PSMH	20"	AVV5*632-M
400W PSMH	20"	AVV5*640-M
750W PSMH	25"	AVV5*675-M
1000W PSMH	25"	AVV5*699-M
1000W MH	25"	AVV5*499-M
150W HPS	20"	AVV5*515-M
250W HPS	20"	AVV5*525-M
400W HPS	20"	AVV5*540-M

Reduced envelope lamp. ED28 for 320W & 400W PSMH. BT37 for 1000W MH & PSMH.

HOUSING	"A"	"B"	"C"	"D"	"E"	"F"	"G"
20" (501 mm)	23.0" (585 mm)	20.0" (501 mm)	11.8" (300 mm)	36.0" (913 mm)	12.0" (305 mm)	20.0" (501 mm)	28.8" (733 mm)
25" (635 mm)	28.6" (726 mm)	25.0" (635 mm)	14.4" (366 mm)	41.8" (1062 mm)	14.5" (368 mm)	25.0" (635 mm)	36.7" (931 mm)

### MOUNTING CODES

Insert Code at \* in Catalog Number



**O** = Side-Arm Mount

**F** = Round Tube Center Tenon

**H** = Round Tube Center 4" Square Pole

**I** = Round Tube Center 5" Square Pole

**J** = Round Tube Center 6" Square Pole

**MOUNTING ALTERNATIVES START ON PAGE 70**

## FACTORY-INSTALLED OPTIONS


DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (150W HPS)	5	
(PSMH, 1000W MH, 250W-400W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V)		
(150W HPS)	T	
(PSMH, 1000W MH, 250W-400W HPS only)	T	
<b>Single Fuse</b> (n/a with Post-Top fixtures)		
(277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (n/a with Post-Top fixtures)		
(208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Button Photocell</b> (n/a 1000W 120V & all 480V)		
(277V Reactor, 120V, 277V, 208V, or 240V)	27, 1, 2, 3, or 4	P
(Canada 347V)	6	P
<b>External Photocell</b>		
For fixtures w/1000W, 120V	1	P
For fixtures w/480V	5	P

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
<b>Round Pole Adaptor</b> (fits round poles 4" to 6" in diameter)	AVRP-3

SEE PAGE 69 FOR MORE INFORMATION ABOUT THIS ACCESSORY







# AVVA SERIES by RUUD LIGHTING DIRECT


## AUTOMOTIVE FRONTLINE AERODOME®

AeroDome Automotive Frontline is a stylish fixture that features a high-impact, clear tempered glass lens, reflectors made of premium-grade pre-finished aluminum, and a rugged, die-cast housing. Optics are IES Full Cutoff and rotatable for mounting and layout flexibility plus provides high light levels on the frontline.

**APPLICATIONS:** Specifically designed for frontline automotive sales lots

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
250W PSMH	25"	AVVA*6925-M
320W PSMH	25"	AVVA*6932-M
400W PSMH	25"	AVVA*6940-M
750W PSMH	25"	AVVA*675-M
1000W PSMH 	25"	AVVA*699-M
1000W MH 	25"	AVVA*499-M
250W HPS	25"	AVVA*592-M
400W HPS	25"	AVVA*594-M

 Reduced envelope lamp. BT37 for 1000W MH & PSMH.


### MOUNTING CODES

Insert Code at \* in Catalog Number



- O** = Side-Arm Mount
- L** = Side-Arm Mount (optic rotated)
- R** = Side-Arm Mount (optic rotated)
- F** = Round Tube Center Tenon
- H** = Round Tube Center 4" Square Pole
- I** = Round Tube Center 5" Square Pole
- J** = Round Tube Center 6" Square Pole


**MOUNTING ALTERNATIVES START ON PAGE 70**

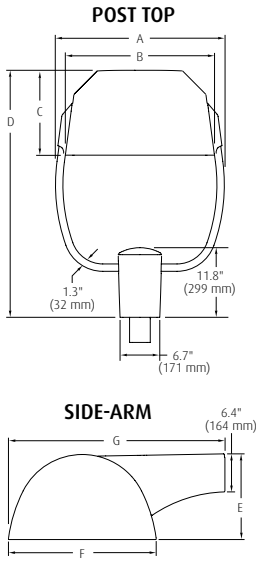

HOUSING	"A"	"B"	"C"	"D"	"E"	"F"	"G"
25"	28.6"	25.0"	14.4"	41.8"	14.5"	25.0"	36.7"
(635 mm)	(726 mm)	(635 mm)	(366 mm)	(1062 mm)	(368 mm)	(635 mm)	(931 mm)

### ROTATABLE OPTICS

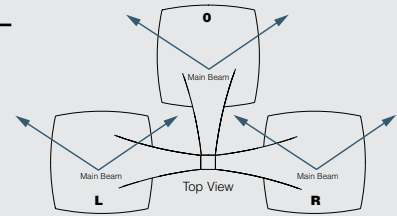

AeroDome Frontline optics can be rotated 90 degrees to meet site light distribution requirements while retaining the visual orientation of the AeroDome housing and pole. Rotatable optics are factory set or field rotatable on the Side-Arm Mount and field rotatable in the Round Tube Center Post-Top Mount.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (250W-400W PSMH only)	27		
<b>480V Ballast</b>	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V)	T		
<b>Single Fuse</b> (n/a with Post-Top fixtures) (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (n/a with Post-Top fixtures) (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Button Photocell</b> (n/a 1000W 120V & all 480V) (277V Reactor, 120V, 277V, 208V, or 240V) (Canada 347V)	27, 1, 2, 3, or 4 6	P P	
<b>External Photocell</b> For fixtures w/1000W, 120V	1	P	
For fixtures w/480V	5	P	

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Frontline Automotive External Backlight Shield</b>	SBL-AVVA25EBZ
 <b>Round Pole Adaptor</b> (fits round poles 4" to 6" in diameter)	AVRP-3

**SEE PAGE 69 FOR MORE INFORMATION ABOUT THESE ACCESSORIES**

# FLOOD & AREA Mountings

**1-1/2" CLOSE POLE MOUNT**



**MOUNTING CODE 1**

- For AC, LAC, WAC, PR, LPR, WPR, QV, VFT and VPR Series.
- Extruded aluminum mounting arm attaches fixture in a fixed horizontal position to the side of a square pole. A steel backing plate inside the pole secures the fixture.
- On 12" and rectangular housings, the arm measures 1-1/2" L x 2-1/2" H; on 16" and 22" housings, it measures 1-1/2" L x 4-1/2" H.

**6" EXTENDED POLE MOUNT**



**MOUNTING CODE 2**

- For AC, WAC, PR, WPR, QV, VFT and VPR Series.
- Extruded aluminum mounting arm attaches fixture in a fixed horizontal position to the side of a square pole. A steel backing plate inside the pole secures the fixture.
- On 12" housings, the arm measures 1-1/2" L x 2-1/2" H; on 16" and 22" housings, it measures 1-1/2" L x 4-1/2" H.
- When using multiple 22" square housings at a 90° configuration, a special 12" arm is required; see page 71.

**2" ADJUSTABLE FITTER**



**MOUNTING CODE 3**

- For NSF, NSC, NSW, W, FS, LFS, CF, LCF, PM, LPM, PN, LPN, PR, LPR, AC and LAC Series.
- Slip-fits over a 2" pole or tenon (2-3/8" O.D.).
- Allows tilt above horizontal in 2-1/2° increments, as well as lateral rotation.
- Provides enclosed and gasketed internal wiring chamber.
- Knockout provided for field-installed photocell accessory.

**YOKE MOUNT**



**MOUNTING CODE 4**

- For NSF, NSC, NSW, W, FS, LFS, CF, LCF, PM, LPM, PN, LPN, PR, LPR, AC and LAC Series.
- Ideal for wall, ground, roof or wood pole mounting; bolts directly to almost any surface.
- Provided with 36" external cord for ease of wiring.
- Allows tilt above horizontal to any angle, and double locks in 5° increments.

**20° FIXED MOUNT**



**MOUNTING CODE 5**

- For CF Series only.
- Provides optimum tilt above horizontal angle for cutoff optics, where adjustability is not required.
- Arm bolts directly to side of square pole; backing plate secures arm inside pole.

**1/2" ADJUSTABLE FITTER**



**MOUNTING CODE 6**

- For 12" AC, CF, FS, PM, PN, and PR Series.
- NPSM threaded end for mounting to 1/2" threaded pipe or junction box.
- Allows tilt above horizontal in 5° increments.


**NO MOUNTING HARDWARE**



**MOUNTING CODE 8**

- For all Square and Rectangular Series fixtures.
- Fixture comes factory-drilled to accept mounting codes 1, 2, 3, 4, 5, 6, 8 and W. Also used with PT & PBD tenons and 12" arm.
- Comes supplied with 2-foot cord.


**SQUARE TUBE CENTER**



**DIRECT – MOUNTING CODE C, D, E  
TENON – MOUNTING CODE A**

- For QV Series only.
- Fabricated aluminum yoke comprised of square extruded arms and base (C, D or E) or cast hub (A) supports fixture housing directly over pole.
- Base (C, D or E) fits inside a 4", 5" or 6" square pole, secured with four 5/16-18 steel screws. (5" or 6" base available with 22" square housing only).
- Mounting hub (A) is secured with eight allen head set screws (supplied) to prevent rotation. The hub slip-fits over a steel or aluminum tenon measuring 2-3/8" (standard) up to 3" O.D. When mounting 22" square fixtures on fiberglass or aluminum poles, a 3" O.D. steel tenon that mounts inside the pole is required.

**ROUND TUBE CENTER**



**DIRECT – MOUNTING CODE H  
TENON – MOUNTING CODE F**

- For 16" QV Series only.
- Fabricated aluminum yoke comprised of round extruded arms and base (H) or cast hub (F) supports fixture housing directly over pole.
- Base (H) fits inside a 4" square pole, and is secured with four 5/16-18 steel screws.
- Hub (F) slip-fits over a steel or aluminum tenon or pole measuring 2-3/8" up to 3" O.D., and is secured with eight allen head set screws to prevent rotation.

**ROUND TUBE -OFF CENTER**



**DIRECT – MOUNTING CODE M  
TENON – MOUNTING CODE K**

- For 16" AC and PR Series only.
- Fabricated aluminum yoke comprised of round extruded arms and base (M) or cast hub (K) supports fixture housing off-center of pole.
- Base (M) fits inside a 4" square pole, and is secured with four 5/16-18 steel screws.
- Hub (K) slip-fits over a steel tenon or pole measuring 2-3/8" up to 3" O.D.; secured with eight allen head set screws to prevent rotation.

**WALL MOUNT**




**MOUNTING CODE W**

- For AC, LAC, WAC, PR, LPR, WPR, VFT and VPR Series.
- Cast aluminum mounting box with gasket attaches in a fixed position to the side of fixture, utilizing threaded mounting studs supplied.
- Provided with 4 threaded and closed 1/2" conduit entries.
- 150°C minimum supply wire is required.

**ACCESSORIES**

# FLOOD & AREA Economy Flood Accessories

## DEEP BAFFLE – NS SERIES



For use with NS Series. The aluminum baffle controls light direction and provides full side cutoff. It simply wraps around lens frame and is secured with two supplied fasteners. Standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat.▲

### CATALOG #

DB-9

## GLARE SHIELD – NS SERIES




For use with NS Series. The aluminum glare shield holds forward brightness to a minimum for eye-level fixtures. It simply wraps around lens frame and is secured with two supplied fasteners. Standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat.▲

### CATALOG #

GS-9

## WIRE GUARD – NS SERIES



For use with NS Series. The steel Wire Guard provides protection in high vandalism areas. It attaches to the lens with supplied #8-32 black stainless steel screws. A black acrylic E-coat finish is standard. Size is 9.64" x 6.13" x 1.46". 1" between wires.

### CATALOG #

FWG-9

## MOUNTING BOX



For use with NS Series. The cast aluminum box measures 2.5" x 2.5" x 3.75" W, and provides an enclosed wiring chamber to mount a fixture with the 1/2" Adjustable Fitter. Four threaded knockouts are provided for 1/2" conduit entry, one on the top, back and on either side. Standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat.▲

### CATALOG #

MNB-1

## MOUNTING BOX W/STAKE, CORD & PLUG



For use with NS Series. This is the same construction as the MNB-1 Mounting Box, but with a 6.5" long aluminum stake for mounting into the ground. A gasketed, 10 ft. cord is supplied with a 120V straight blade plug. Standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat.▲

### CATALOG #

MNB-2

## CONDUIT SLIPFITTER



For use with NS Series. The cast aluminum hub provides a threaded entry for the 1/2" Adjustable Fitter, and slips over a 2-3/8" O.D. pipe or tenon. A 3/8" allen set screw is provided to secure the slipfitter. Standard with our exclusive Colorfast DeltaGuard® finish, featuring an E-coat epoxy primer with bronze ultra-durable powder topcoat.▲

### CATALOG #

MNH-2

## GROUND MOUNT POST



Use with 2" Adjustable Fitter for ground mounted floodlight fixtures. Wiring or conduit feeds through post base. Overall: 24"H (610 mm) Tube: 18"H x 2.4"D (457 x 60 mm) Base: 4.9"W x 6.3"L (124 x 159 mm)

### CATALOG #

PGM-1

## DEEP BAFFLE – 14" FLOOD



For NSF and NSC Series. Aluminum baffle allows precise control of light direction while maintaining full side cutoff. Attaches to lens frame with supplied #8 fasteners. Finished in black ultra-durable powder topcoat.

### CATALOG #

DB-14

## WIRE GUARD – 14" FLOOD



For NSF, NSC, and NSW Series. Steel guard provides protection to optical system. Attaches easily around lens frame with supplied #8 stainless steel screws. A black acrylic E-coat finish is standard.

### CATALOG #

FWG-14

## GLARE SHIELD – 14" FLOOD



For NSF and NSW Series. The aluminum glare shield holds forward brightness to a minimum for eye level fixtures. It attaches easily around lens frame with two supplied fasteners. Finished in black ultra durable powder topcoat.

### CATALOG #

GS-14

## BUTTON PHOTOCELL



This photocell is suitable for any outdoor fixture with a 120, 208, 240, 277 or 347V ballast. A knockout is provided in the 2" Adjustable Fitter to field install the button-type photocell. There is no sensitivity adjustment.

VOLTAGE	CATALOG #
120V	PC-1
208/240/277V	PC-2
Canada 347V	PC*6

## EXTERNAL PHOTOCELL



For 480V fixtures. This photocell is factory-installed and must be ordered at the same time as the fixture. It measures 3-3/8"L x 2"W x 1-1/2"H. An adjustable window slide allows setting of early turn off/on.

VOLTAGE	SUFFIX
480V	-5P

▲ Consult factory for availability of other finish colors.

# FLOOD & AREA Rectangular Accessories

DEEP BAFFLE



For LFS, LPM and LPN Series. Aluminum baffle allows precise control of light direction while maintaining full side cutoff. Attaches to lens frame with supplied #8 fasteners. Finished with black ultra durable powder paint.

CATALOG # DEPTH

DB-12 3.5"

GLARE SHIELD



Aluminum shield deters brightness for pedestrian traffic. Attaches easily to lens frame with supplied #8 fasteners. Finished with an ultra-durable black powder coat paint. (Glare Shield is not recommended for the LCF or LAC Series.) Consult factory if use of Glare Shield with Polycarbonate Vandal Shield is intended.

CATALOG # DEPTH

GS-12 4.0"

WIRE GUARD



Steel guard provides protection to optical system of any L Series fixture. Attaches easily to lens frame with supplied #8 fasteners. Finished with an acrylic black E-coat paint. 1" (25 mm) space between wires.

CATALOG #

FWG-L

POLYCARBONATE VANDAL SHIELD




Clear polycarbonate shield 0.118" (3 mm) thick provides protection to optical system of any L Series fixture. Attaches easily to lens frame with supplied #8 fasteners. Consult factory if use of Polycarbonate Vandal Shield with Glare Shield is intended. (n/a if fixture is used in an upright position)

CATALOG # DEPTH

LS-L 2.0"

INTERNAL LOUVER



For LPM and LPN Series. Field-installed Internal Louver accessory provides light pollution control and helps conceal the light source (reduces brightness).

CATALOG #

DL-L

BACKLIGHT SHIELD



For LPR and LAC fixtures (standard on LAC Wall Mount). This pre-finished, anodized-aluminum shield provides backlight cutoff for floodlights. It mounts easily inside the fixture lens.

CATALOG #

SBL-L

GROUND MOUNT POST



Use with 2" Adjustable Fitter for ground mounted floodlight fixtures. Wiring or conduit feeds through post base. Overall: 24"H (610 mm). Tube: 18"H x 2.4"D (457 x 60 mm). Base: 4.9"W x 6.3"L (124 x 159 mm).

CATALOG #

PGM-1

TAMPERPROOF SCREWDRIVER



For use with fixtures using Tamperproof Lens Fasteners.

CATALOG #

TPS-1

BUTTON PHOTOCELL



This photocell is suitable for any outdoor fixture with a 120, 208, 240, 277 or 347V ballast. A knockout is provided in the 2" Adjustable Fitter to field install the button-type photocell. There is no sensitivity adjustment.

VOLTAGE CATALOG #

120V PC-1

208/240/277V PC-2

Canada 347V PC\*6

EXTERNAL PHOTOCELL



For 480V fixtures. This photocell is factory-installed and must be ordered at the same time as the fixture. It measures 3-3/8"L x 2"W x 1-1/2"H. An adjustable window slide allows setting of early turn off/on.

VOLTAGE SUFFIX


480V -5P

MORE ACCESSORIES



# FLOOD & AREA Square Accessories

**DEEP BAFFLE**



For FS, PM, and PN Series. Aluminum baffle allows precise control of light direction while maintaining full side cutoff. Attaches to lens frame with supplied #8 fasteners. Available for all housing sizes. Finished with an acrylic black E-coat paint.

CAT. #	HOUSING DEPTH	
DB-12	12"	3.5"
DB-16	16"	5.0"
DB-22	22"	6.0"

**GLARE SHIELD**



Aluminum shield deters second story brightness and holds forward light fixture. Attaches easily to lens frame with supplied #8 fasteners. Available for all housing sizes. Finished with an ultra-durable black powder coat paint. Glare Shield is not recommended for the CF Series. Consult factory if use of Glare Shield with Polycarbonate Vandal Shield is intended.

CAT. #	HOUSING DEPTH	
GS-12	12"	4.0"
GS-16	16"	5.0"
GS-22	22"	6.5"

**WIRE GUARD**



Steel guard provides protection to optical system of any outdoor or square commercial fixture with 12", 16" or 22" housing. Attaches easily to lens frame with supplied #8 fasteners. Finished with an acrylic black E-coat paint. 1" space between wires.

CATALOG #	HOUSING
FWG-12	12"
FWG-16	16"
FWG-22	22"

**POLYCARBONATE VANDAL SHIELD**



Clear polycarbonate shield 0.118" thick provides protection to optical system of any size floodlight or commercial fixture. Attaches easily to lens frame with supplied #8 fasteners. Consult factory if use of Polycarbonate Vandal Shield with Glare Shield is intended. (n/a if fixture is used in an upright position.)

CAT. #	HOUSING DEPTH	
LS-12	12"	2.0"
LS-16	16"	2.5"
LS-22	22"	3.5"

**CUTOFF BAFFLE**



For QV, VFT and VPR series. Aluminum shield for achieving full-cutoff performance. Attaches to lens frame with supplied #8 fasteners. Standard with our Colorfast DeltaGuard® finish.

CAT. #	HOUSING DEPTH	
CSF-22	22"	2.375"

**INTERNAL LOUVER**



For PM and PN Series. Internal Louver provides light pollution control and helps conceal the light source (reduces brightness).

CATALOG #	HOUSING
DL-12	12"
DL-16	16"

**BACKLIGHT SHIELD**



For AC, CF, PR, VFT, VPR, WAC and WPR fixtures. This prefinished anodized aluminum shield provides backlight cutoff for floodlights. It mounts easily inside the fixture lens and can be position adjusted. Is available for all housing sizes (standard on the AC and WAC Series Wall Mount, mounting code "W").

CATALOG #	HOUSING
SBL-12	12"
SBL-16	16"
SBL-22	22"

**BUTTON PHOTOCELL**



This photocell is suitable for any outdoor fixture with a 120, 208, 240, 277 or 347V ballast. A knockout is provided in the 2" Adjustable Fitter to field install the button-type photocell. There is no sensitivity adjustment.

VOLTAGE	CATALOG #
120V	PC-1
208/240/277V	PC-2
Canada 347V	PC+6

**EXTERNAL PHOTOCELL**



For 1000W fixtures at 120V or 480V fixtures. This photocell is factory installed and must be ordered at the same time as the fixture. It measures 3-3/8"L x 2"W x 1-1/2"H. An adjustable window slide allows setting of early turn off/on.

VOLTAGE	SUFFIX
120V (1000W)	-1P
480V	-5P



# FLOOD & AREA AeroDome® & Aviator® Accessories

## EXTENDED ARM



For AVH3 and AVH4 Series. Extended Arm is cast aluminum and is field installed to the standard Integrated Arm. Mounts directly to a square pole.

CAT. #	HOUSING	LENGTH
AVE-1	14.4"x15.5"	15"
AVE-2	18.5"x19.6"	18"

## UPSWEEP EXTENDED ARM



For AVH3 and AVH4 Series. Extended Upsweep Arm is cast aluminum and is field-installed to the standard Integrated Arm, blending the shape of the fixture housing. Mounts directly to a square pole. Raises fixture housing by 7.5" (small housing) or 9.0" (medium housing).

CAT. #	HOUSING	LENGTH
AVU-1	14.4"x15.5"	15"
AVU-2	18.5"x19.6"	18"


## ROUND POLE ADAPTOR



Cast aluminum adaptor secures fixture to 3" to 6" round pole (AVH Series) or 4" to 6" round pole (AVV Series). Sized to mount up to four fixtures 90° apart.

CAT. #	HOUSING
AVRP-1	(AVH) 14.4"x15.5"
AVRP-2	(AVH) 18.5"x19.6"
AVRP-3	All AVV Series

## BACKLIGHT SHIELD – AVH SERIES



For AVH3 and AVH4 Series. This prefinished anodized aluminum shield provides backlight cutoff. It mounts easily inside the fixture lens and can be position adjusted.

CATALOG #	HOUSING
SBL-AV1	14.4" x 15.5"
SBL-AV2	18.5" x 19.6"

## BACKLIGHT SHIELD – AVV SERIES



For AVV3 and AVV4 Series. Fabricated of 0.063" (2 mm) thick aluminum. Used to reduce light level to house side of fixture. Attaches to any of the four sides of the lens frame with supplied black stainless steel hardware. Shield measures 2.4" deep. To maintain full cutoff order SBL-AVV20CBZ or SBL-AVV25CBZ.

CATALOG #	HOUSING
SBL-AVV20EBZ	20"
SBL-AVV25EBZ	25"

## BACKLIGHT SHIELD – AVVA SERIES



For AVVA Series only. Fabricated of 0.063" (2 mm) thick aluminum. Used to reduce light level to house side of fixture. Attaches to lens frame with supplied black stainless steel hardware. Shield measures 10.9" deep.

CATALOG #
SBL-AVVA25EBZ

## FULL CUTOFF W/BACKLIGHT SHIELD



For AVV3 and AVV4 Series. Fabricated of 0.063" (2 mm) thick aluminum. Includes External Backlight Shield (SBL-AVV20EBZ or SBL-AVV25EBZ), which is used for achieving full cutoff performance. Attaches to lens frame with supplied black stainless steel hardware. Shield measures 2.3" deep.

CATALOG #	HOUSING
SBL-AVV20CBZ	20"
SBL-AVV25CBZ	25"

## EXTERNAL PHOTOCELL



For 1000W fixtures at 120V or 480V fixtures. This photocell is factory installed and must be ordered at the same time as the fixture. It measures 3-3/8"L x 2"W x 1-1/2"H. An adjustable window slide allows setting of early turn off/on.

VOLTAGE	SUFFIX
120V (1000W)	-1P
480V	-5P



# FLOOD & AREA Mounting Alternatives

## TENON ADAPTER



The Tenon Adaptor supports single or multiple square outdoor fixtures using a 6.1" (155 mm) or 12.1" (308 mm) long horizontal arm. This arm mounts to a round hub that slip-fits over a tenon or pole ranging in size from 2-3/8" to 3" O.D. The cast aluminum hub is provided with eight allen set screws. Order the fixture "without arm" (mounting code "8") and specify the Tenon Adaptor configuration as follows:

### TENON ADAPTOR WITH 6" ARM FOR 16", 22" OR 22" WEDGE HOUSING

#### CATALOG # MOUNTING

PT-11	1 fixture
PT-12(90)	90° twin
PT-12(180)	180° twin
PT-13(90)	90° triple
PT-13(120)	120° triple
PT-14(90)	90° quad

**NOTE:** PT-12(90), PT-13(90) and PT-14(90) can not be used with 22" Housing.

### TENON ADAPTOR WITH 6" ARM FOR 12", 16" WEDGE OR RECTANGULAR HOUSING

#### CATALOG # MOUNTING

PT-21	1 fixture
PT-22(90)	90° twin
PT-22(180)	180° twin
PT-23(90)	90° triple
PT-23(120)	120° triple
PT-24(90)	90° quad

### TENON ADAPTOR WITH 12" ARM FOR 16" OR 22" HOUSING

#### CATALOG # MOUNTING

PT-61	1 fixture
PT-62(90)	90° twin
PT-62(180)	180° twin
PT-63(90)	90° triple
PT-63(120)	120° triple
PT-64(90)	90° quad

## ADAPTER FOR AERODOME/AVIATOR



The Tenon Adapter for the AeroDome and Aviator supports multiple direct-arm mounted fixtures using round pole adaptors (AVRP included). The round pole adaptors mount to a round hub that slip-fits over a tenon or pole ranging in size from 2-3/8" to 3" O.D. The cast aluminum hub is provided with eight allen set screws.

### TENON ADAPTOR FOR AVIATOR 14.4" x 15.5" HOUSING

#### CATALOG # MOUNTING

PT-A11	1 fixture
PT-A12(90)	90° twin
PT-A12(180)	180° twin
PT-A13(90)	90° triple
PT-A13(120)	120° triple
PT-A14(90)	90° quad

### TENON ADAPTOR FOR AVIATOR 18.5" x 19.6" HOUSING

#### CATALOG # MOUNTING

PT-A21	1 fixture
PT-A22(90)	90° twin
PT-A22(180)	180° twin
PT-A23(90)	90° triple
PT-A23(120)	120° triple
PT-A24(90)	90° quad

### TENON ADAPTOR FOR AERODOME 20" AND 25" HOUSING

#### CATALOG # MOUNTING

PT-A31	1 fixture
PT-A32(90)	90° twin
PT-A32(180)	180° twin
PT-A33(90)	90° triple
PT-A33(120)	120° triple
PT-A34(90)	90° quad

## MID-POLE MOUNTING BRACKET




Mount a floodlight to the side of a square pole. Typically, two brackets are mounted on either side to provide accent lighting for the front row of an automobile sales lot. The 11" (279 mm) long by 3" (76 mm) square steel arm bolts securely to the pole, and provides a 2-3/8" O.D. tenon to mount a fixture with our 2" Adjustable Fitter. Two 1/2" hex head bolts are supplied to secure the bracket to the pole. Provided friction fit end cap encloses the wiring chamber. **NOTE:** Pole must be field drilled before installation of Bracket.

#### CATALOG # MOUNTING

PW-1A3(**)	1 fixture
PW-2A3(**)	2 fixtures

\*\* Indicate 3", 4", 5", or 6" pole

## CROSS-ARM ADAPTOR



This adaptor is designed to attach any square outdoor fixture with the Yoke Mount to a horizontal surface, such as a wood cross arm or a parapet. Supplied with three 3/8" x 3/4" long stainless steel screws to mount the bracket to the Yoke Mount. The base of the adaptor is marked in 10° increments to set the rotation angle of the fixture. Vertical tilt adjustment of the fixture is made with the Yoke bracket. We recommend use of 1/2" bolt or screw to attach Cross-Arm Adaptor to its mounting surface (supplied by others). Measures 2.7"L x 4.3"W x 4.3"D (69 x 109 x 109 mm).

#### CATALOG #

CA-1

## MOUNTING BOX



The cast aluminum box measures 2.5" x 2.5" x 3.8" W (64 x 64 x 95 mm), and provides an enclosed wiring chamber to mount a fixture with the 1/2" Adjustable Fitter. Four threaded knockouts are provided for 1/2" conduit entry, on top, back and on either side. The box is supplied with a gasket at the cover to ensure a watertight seal. Three screws are provided to secure the cover to the box. A ground screw is provided inside the box.

#### CATALOG #

MNB-1

## MOUNTING BOX W/STAKE, CORD & PLUG



Same construction as the MNB-1 Mounting Box, but with a 6.5" (165 mm) long aluminum stake for ground mounting. A gasketed, 10-foot cord is supplied with a 120V straight blade plug.

#### CATALOG #


MNB-2

# FLOOD & AREA Mounting Alternatives




Order the fixture "without arm" (mounting code "8"). Consult factory for use with Round Tapered pole.

CAT. #	DESCRIPTION
PM-2/12-12	For 12" sq. housing, 16" Wedge, and Rectangular
PM-2/16-12	For 16" sq. housing, 22" Wedge
PM-2/22-12	For 22" sq. housing




The WM-1 Bracket attaches a Ruud outdoor light to almost any surface, including on the ground, to a wall, on a roof or to the side of a wood pole. The WM-1 Bracket provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our 2" Adjustable Fitter. We suggest use of 3/8" dia. bolts to mount bracket to wall. Drill points for box mounting provided by installer.

CATALOG #
WM-1




The WM-2 Bracket attaches a Ruud outdoor light to almost any surface, including on the ground, to a wall, on a roof or to the side of a wood pole. The WM-2 Bracket provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our 2" Adjustable Fitter. We suggest use of 3/8" dia. bolts to mount bracket to wall. Mounting holes are spaced 3-1/4" apart. If surface wiring is required, consult factory.

CATALOG #
WM-2



The WM-3 Bracket attaches a Ruud outdoor light to almost any surface, including to a wall, on a roof or to the side of a wood pole. Bracket is a 4.8" (121 mm) sq. and 1/4" (6 mm) thick aluminum plate to mount fixture with Direct Mount arm. **(NOTE: Not available with Fixed 20° Mount.)** We suggest use of 3/8" dia. bolts to mount bracket to wall. Mounting holes are spaced 4" apart.

CATALOG #
WM-3



The WM-4 Bracket attaches a Ruud outdoor light to almost any surface, including to a wall, on a roof or to the side of a wood pole. The WM-4 Bracket provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our 2" Adjustable Fitter. We suggest use of 3/8" dia. bolts to mount bracket to wall. Mounting holes are spaced 3-1/4" apart. If surface wiring is required, consult factory.

CATALOG #
WM-4



The cast aluminum hub provides a threaded entry for the 1/2" Adjustable Fitter, and slips over a 2-3/8" O.D. pipe or tenon. A 3/8" allen set screw is provided to secure the slipfitter. 1.9"/2"H (48/52 mm)

CATALOG #
MNH-2



Use with 2" Adjustable Fitter for ground mounted floodlight fixtures. Wiring or conduit feeds through post base. Overall: 24"H (610 mm)  
Tube: 18"H x 2.4"D (457 x 60 mm)  
Base: 4.9"W x 6.3"L (124 x 159 mm)

CATALOG #
PGM-1



Structural steel bracket attaches to Yoke Mount with supplied hardware and to pole with 5/8" through bolt or threaded rod (supplied by others). 6" to 12" (152 to 305 mm) diameter round wood poles.


CATALOG #
PWY-1

Many factors go into selecting the right pole for your application. Fixture size, shape, mounting method, Effective Projected Area (EPA) rating and even geographical location of the job site should all be considered.

Ruud Lighting offers three classes of poles to meet your project needs:

## PREMIUM

Premium steel poles include a Crown-Weld® pole base and is much stronger than traditional designs. Crown-Weld has four formed triangle sections and increased weld surface area that provides a dramatic improvement in pole fatigue resistance and yield strength and features a 50% higher EPA value.

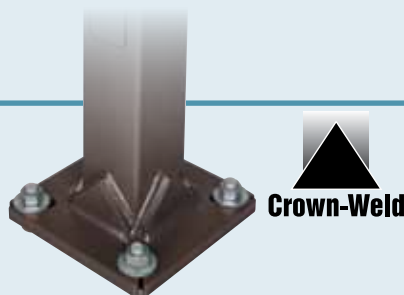

PAGE 74

## PREMIUM REINFORCED

We made our Premium Square Steel pole even better by reinforcing the inside of the first 24 inches of the pole, making it stronger than non-reinforced poles yet lighter than poles of greater width.



PAGE 74

### BENEFITS FOR PREMIUM POLES

#### Exclusive Colorfast DeltaGuard® Finish

DeltaGuard is our exclusive on-site total finishing system that ensures pole and fixture color are an exact match while providing unmatched protection against the elements.

The DeltaGuard process offers outstanding performance in durability and color retention in addition to:

- Ultraviolet Light Resistance
- Abrasion Resistance
- Superior Adhesion
- Corrosion Resistance
- Chemical Resistance



#### High-Quality Materials

Our poles are manufactured using the highest quality of aluminum and steel so you never have to worry about the integrity of your project.

#### NEC Requirements

All poles offered by Ruud Lighting meet or exceed NEC requirements.

**NOTE:** Ruud Lighting Premium Poles are intended to be sold with Ruud Lighting Fixtures. In some instances we may sell a pole for replacement purposes if existing Ruud fixtures are in use or for warranty purposes. We reserve the right to limit or refuse to sell poles independent of fixtures.

## ROUND TAPERED

Round Tapered Poles are available in aluminum or steel and combine a graceful, distinctive appearance with quality construction. The grounding lug meets UL and NEC requirements for electrical ground bonding.



PAGE 76

# POLE COMPARISON CHART

FEATURE	PREMIUM SQUARE STEEL					TAPERED STEEL	TAPERED ALUMINUM
	3"	4" (0.125 WALL)	4" (0.188 WALL)	5"	6"	ROUND	ROUND
<b>POLE LENGTH</b>							
10'	•	•					
12'		•					
15'	•	•					
17'		•					
20'	•	•					
22'		•	•				
25'		•	•	•		•	•
27'		•					
30'		•	•	•	•	•	•
35'						•	•
39'						•	•
45'						•	•
50'						•	
<b>FINISHES</b>							
Bronze (standard)	•	•	•	•	•	•	•
Black (extra charge)	•	•	•	•	•		
Black (no extra charge)						•	•
White (extra charge)	•	•	•	•	•		
White (no extra charge)						•	•
Silver (extra charge)	•	•	•	•	•		
<b>WARRANTY</b>							
7-year DeltaGuard®	•	•	•	•	•		
1-year						•	•
<b>SUPPLIED WITH</b>							
Masonite Template	•	•	•	•	•		
Paper Template (not to scale)						•	•
Anchor Bolts	•	•	•	•	•	•	•
Base Cover	•	•	•	•	•	•	•
Nut Cover							•
Pole Cap (Direct Mount)	•	•	•	•	•	•	•
<b>SHIPPING TIME</b>							
Quik Ship™	•	•	•	•	•		
4 weeks						1-50	1-30
5 weeks							31-75
6 weeks						51-99	76-99
Consult Factory						100+	100+
<b>FREIGHT</b>							
Based on Destination	•	•	•	•	•		
Included						•	•
<b>ACCESSORY</b>							
GFI Receptacle	•	•	•	•	•		

## REINFORCED WALL

## ORDERING THE PERFECT POLE

- 1 Select a fixture and desired pole height.
- 2 Determine EPA rating for the selected fixture and mounting method (see pages 100-101).
- 3 Find the geographic wind zone for the job site (see page 95 and 97).
- 4 Ensure the pole's EPA rating is equal to or greater than the EPA rating for your desired fixture and mount by comparing the fixture/mount EPA rating with the selected pole's rating.
- 5 If your pole isn't equal to or greater than EPA rating for the fixture and mount, look for our heavier duty pole in the desired height with sufficient EPA rating.
- 6 Have this information ready and call us for final pole selection.

**NOTE:** When selecting poles for geographic areas with winds or EPAs exceeding our published data, please consult a local civil engineer with the information from our catalog before ordering.



# PREMIUM

## STRAIGHT SQUARE STEEL POLES



Premium straight square steel poles offer the ultimate in strength and reliability. These non-tapered poles are available in 3-, 4-, 5- or 6-inch square, ranging from 10- through 30-feet in length and feature our Crown-Weld pole base. Steel pole base cover and pole cap with matching DeltaGuard® finish to match fixture.


Our Reinforced Premium Straight Square Steel poles fill the need for a stronger 27- and 30-foot 4-inch pole in tough wind conditions.

### PREMIUM EXCLUSIVE FEATURES

- Crown-Weld pole base featuring 50% higher EPA value
- Colorfast DeltaGuard® finish with 7-year warranty
- **EXACT** pole to fixture finish color match
- Steel pole base cover and pole cap with matching Colorfast DeltaGuard finish
- **QUICK SHIP™**
- Poles ship with fixtures
- Masonite bolt template
- Pole freight based on destination
- Comes complete with hand hole cover, pole base cover, and anchor bolts






Reinforced Wall for 27- and 30-foot 4-inch poles



Hanging signs, banners and flags on poles change the EPA rating and increase vibration. The EPA ratings data provided in this catalog does not allow for this added stress, which could result in pole or fixture failure.



## INCLUDED ACCESSORIES

DESCRIPTION	
	<b>Template and Anchor Bolts</b> Masonite template and galvanized anchor bolts are included with each Premium pole. Anchor bolts shipping in advance will incur additional freight charges.
	<b>Hand Hole Cover</b> Premium poles come with a 2" x 6" (51 x 152 mm) hand hole located 12-18" (305-457 mm) above the pole base, and they include a hand hole cover and grounding lug. Hand hole cover is shipped separately from pole.
	<b>Pole Base Cover</b> Each Premium pole is shipped complete with a welded base and base cover. The steel pole has Crown-Weld base and slotted holes.

## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <p><b>GFI Receptacle (120V)</b> The common-sense design of this accessory allows for easy installation; the outlet is built right into a pole hand hole cover—no extra holes to drill, extra conduit to install or separate boxes to attach, and it's UL Listed in the U.S. and Canada for wet locations. The assembly is tightened down with two internal locking brackets, and a gasketed, hinged cover is included. Order with your poles or retrofit an existing installation.</p>	REC-GFIBZ

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)


CATALOG #	LENGTH (FT) X WIDTH (IN) X WALL (IN)	BOLT CIRCLE RANGE (IN)	BOLT PATTERN RANGE (IN)	BOLT SIZE (IN)	POLE EPA RATINGS BASE WIND VELOCITY (MPH)								SHIPPING WEIGHT (LBS)
					70	80	90	100	110	120	130	140	
					PS3S10C*BZ	10 x 3 x 0.125	10/9.3-11	6.6-7.7	3/4	31.4	23.6	18.2	
PS3S15C*BZ	15 x 3 x 0.125	10/9.3-11	6.6-7.7	3/4	18.5	13.4	9.9	7.4	5.5	4.1	3.0	2.2	82
PS3S20C*BZ	20 x 3 x 0.125	10/9.3-11	6.6-7.7	3/4	11.5	7.8	5.2	3.3	2.0	0.9	0.1	0.0	119
PS4S10C*BZ	10 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	59.9	45.2	35.1	27.9	22.6	18.5	15.4	12.9	78
PS4S12C*BZ	12 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	48.4	36.2	27.9	21.9	17.5	14.2	11.6	9.5	99
PS4S15C*BZ	15 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	36.5	26.9	20.3	15.6	12.1	9.5	7.4	5.8	119
PS4S17C*BZ	17 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	30.7	22.3	16.6	12.5	9.41	7.1	5.3	3.9	131
PS4S20C*BZ	20 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	24.0	16.9	12.1	8.7	6.1	4.2	2.7	1.5	150
PS4S22C*BZ	22 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	20.4	14.0	9.7	6.6	4.3	2.5	1.2	0.1	163
PS4S22S*BZ	22 x 4 x 0.188	10/9.3-11	6.6-7.7	3/4	31.1	22.3	16.2	11.8	8.6	6.2	4.3	2.8	207
PS4S25C*BZ	25 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	15.9	10.4	6.6	3.9	1.9	0.4	0.0	0.0	182
PS4S25S*BZ	25 x 4 x 0.188	10/9.3-11	6.6-7.7	3/4	25.3	17.6	12.3	8.5	5.7	3.6	1.9	0.6	252
PS4S27R*BZ	27 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	22.0	14.9	10.0	6.6	4.0	2.0	0.0	0.0	232
PS4S30R*BZ	30 x 4 x 0.125	10/9.3-11	6.6-7.7	3/4	17.7	11.4	7.1	4.0	1.7	0.0	0.0	0.0	301
PS4S30H*BZ	30 x 4 x 0.188	10/9.3-11	6.6-7.7	3/4	19.5	12.5	7.8	4.4	1.9	0.0	0.0	0.0	337
PS5S25S*BZ	25 x 5 x 0.188	10/9.7-11.3	6.9-7.9	1	43.9	31.4	22.8	16.6	12.1	8.7	6.0	3.8	320
PS5S30S*BZ	30 x 5 x 0.188	10/9.7-11.3	6.9-7.9	1	32.2	21.9	14.9	9.9	6.2	3.4	1.2	0.0	379
PS6S30S*BZ	30 x 6 x 0.188	11.5/11.3-12.8	8.0-9.0	1	50.8	35.7	25.3	17.9	12.4	8.2	4.9	2.4	457

STEEL

**REINFORCED WALL**

**POLE NOTES:**

Insert Code at \* in Catalog Number



Indicate **T** for tenon mount.  
(Order tenon separately as found on pages 70 and 78-79.)

For CF Series fixtures with Fixed 20° Mount, add prefix "2" to configuration numbers (i.e. "21", "22", "23", "25", and "26").  
**EXAMPLE:** PS6S30S1BZ becomes PS6S30S21BZ



**BOLT CIRCLE:** Measure from the center of one stud hole directly across the center of the base plate, to the center of the opposite stud hole.




**BOLT PATTERN:** Measure from the center of one stud hole to the center of an adjacent stud hole.

# APPROXIMATE MAXIMUM WIND ZONES FOR PREMIUM POLES

This map indicates approximate maximum wind zones throughout the United States. Base wind velocities are established using a 50-year recurring mean. The EPA rating of the pole must be equal to or greater than that of the fixture(s), taking into consideration the wind conditions at the job site. Pole and fixture EPA ratings are on pages 80-81.

**NOTE:** When selecting poles for geographic areas with winds or EPAs exceeding our published data, please consult a local civil engineer with the information from our catalog before ordering.

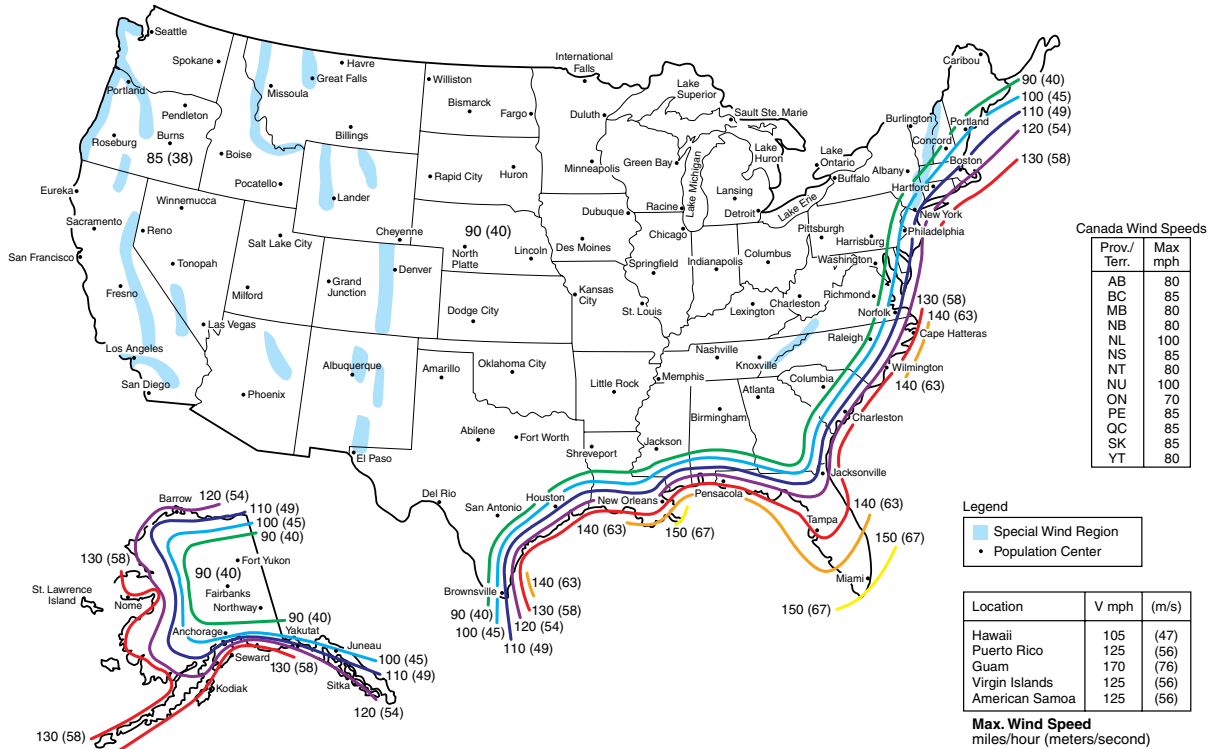






# ROUND TAPERED STEEL AND ALUMINUM POLES




Round Tapered poles are available in lengths of 25, 30, 35, 39, 45 and 50 feet. The steel shaft is composed of ASTM A595 Grade A 11-gauge steel with minimum yield strength of 55,000 psi. Shaft taper is a uniform 0.140-inch per foot, and the one-piece construction features a full-length, longitudinal, high frequency resistance weld. The base is made of carbon steel with 36,000-psi minimum yield strength and telescopes the shaft, welded top and bottom. The aluminum shaft is made of seamless 6063 alloy aluminum and the base is cast from A356 alloy aluminum. The ground lug meets UL and NEC requirements for electrical ground bonding.

## POLE FEATURES

- 1-year warranty bronze polyester powder finish
- Close pole to fixture finish color match
- Partially galvanized anchor bolts
- Reinforced hand hole welded to the shaft
- Steel hand-hole cover attached with two fasteners
- Comes complete with pole base cover or nut covers and anchor bolts



Tenon on top of pole



Hanging signs, banners and flags on poles change the EPA rating and increase vibration. The EPA ratings data provided in this catalog does not allow for this added stress, which could result in pole or fixture failure.

## INCLUDED ACCESSORIES

### DESCRIPTION



#### Template and Anchor Bolts

Paper template (not to scale) and anchor bolts are included with each round tapered pole. Anchor bolts shipping in advance will incur additional freight charges.



#### Hand Hole Cover

Steel cover and attachment bar with machine screw is included to cover the rectangular-shaped hand hole. Hand hole is located 18-inches above the pole base.



#### Pole Base Cover

Each Round Tapered steel pole (shown) is shipped with a full base cover made from ABS plastic. Its two-piece construction is secured with two plastic, hand-push rivets. Each Round Tapered Aluminum pole is shipped with nut covers.

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)


	CATALOG #	BASE O.D. (IN) X TOP O.D. (IN) X WALL (IN)	POLE LENGTH (FT)	BOLT CIRCLE RANGE (IN)	BOLT PATTERN RANGE (IN)	BOLT SIZE (IN)	80 MPH		90 MPH		100 MPH		SHIPPING WEIGHT (LBS)
							MAX EPA	MAX FIXTURE WEIGHT	MAX EPA	MAX FIXTURE WEIGHT	MAX EPA	MAX FIXTURE WEIGHT	
STEEL	%PSRV25C*BZ	7.0 x 3.5 RND x 0.125	25'	10.0/9.5-10.5	6.8-7.4	1	20.3	507	16.2	405	13.1	327	200
	%PSRV30C*BZ	8.0 x 3.8 RND x 0.125	30'	11.0/10.5-11.5	7.5-8.1	1	18.9	473	14.9	373	12.0	300	265
	%PSRV35C*BZ	8.5 x 3.6 RND x 0.125	35'	11.5/11-12	7.8-8.4	1	18.9	472	15.1	377	12.2	305	315
	%PSRV39C*BZ	9.0 x 3.6 RND x 0.125	39'	12.5/12-13	8.5-9.1	1	17.2	430	13.5	338	10.8	270	355
	%PSRV45C*BZ	10.0 x 3.7 RND x 0.125	45'	13.5/13-14	9.2-9.8	1	17.4	435	13.5	338	10.6	265	450
	%PSRV50C*BZ	10.0 x 3.0 RND x 0.125	50'	13.5/13-14	9.2-9.8	1	13.2	330	10.6	265	8.3	208	475
ALUMINUM	%PARV25C*BZ	6.0 x 4.0 RND x 0.188	25'	9.5/8.75-10.25	6.18-7.25	3/4	8.6	150	6.1	150	4.6	150	119
	%PARV30C*BZ	8.0 x 4.5 RND x 0.188	30'	11.5/11-12.12	7.75-8.56	1	14.6	150	11.1	150	8.6	150	182
	%PARV35C*BZ	8.0 x 4.5 RND x 0.188	35'	11.5/11-12.12	7.75-8.56	1	9.8	150	7.1	150	5.3	150	208
	%PARV39C*BZ	9.0 x 6.0 RND x 0.188	39'	14.0/13.38-15	9.43-10.56	1	16.7	200	12.4	200	9.2	200	285

**NOTE:** Only available in contiguous 48 states.

**POLE NOTES:**

Indicate **T** for tenon mount.  
(Order tenon separately as found on pages 70 and 78-79.)

Insert Code at \* in Catalog Number (for AeroDome/Aviator only)



AeroDome and Aviator fixtures require AVR accessory for each fixture. See page 69.



**BOLT CIRCLE:** Measure from the center of one stud hole directly across the center of the base plate, to the center of the opposite stud hole.



**BOLT PATTERN:** Measure from the center of one stud hole to the center of an adjacent stud hole.

**ORDERING**

Because poles are manufactured upon your order, your credit card will be charged immediately regardless of lead-time required prior to shipment. Please be sure to carefully select your poles based upon proper mounting configuration and wind loading in your area.

**POLE SHIPPING**

A complete shipping address must be provided at time of order (no P.O. boxes). Expedited orders cannot be accepted. Because poles and fixtures ship from different locations, we cannot guarantee arrival of fixtures and poles on the same day. Anchor bolts shipping in advance will incur additional freight charges.

**CHANGES AND CANCELLATIONS**

Your order cannot be changed or cancelled because these poles are manufactured for you specifically.

# APPROXIMATE MAXIMUM WIND ZONES FOR ROUND TAPERED POLES

This map indicates approximate maximum wind zones throughout the United States. Base wind velocities are established using a 50-year recurring mean. The EPA rating of the pole must be equal to or greater than that of the fixture(s), taking into consideration the wind conditions at the job site. Pole and fixture EPA ratings are on pages 80-81.

**NOTE:** When selecting poles for geographic areas with winds or EPAs exceeding our published data, please consult a local civil engineer with the information from our catalog before ordering.



## SQUARE INTERNAL – VERTICAL

**Steel (PB Series)** The square base of the PB Series bracket is designed to be inserted into a square, non-tapered pole. (When ordering, specify the appropriate pole width). The multiple PB Series brackets are supplied with snap-on end caps to enclose the wiring chamber. The PB Series brackets are constructed of square steel tubing. Fixtures mounted to these brackets can be adjusted both vertically and horizontally.


**Aluminum (PA Series)** The PA Series bracket is similar in design and function to the PB Series but is made of cast aluminum. Only the single PA Series tenon is available. It is used with square, non-tapered poles.

SINGLE MOUNT FOR SQUARE POLE




CAT #	SIZE	MATERIAL
PB-1A3	3"	Steel
PA-1A4	4"	Aluminum
PB-1A5	5"	Steel
PB-1A6	6"	Steel

TWIN MOUNT FOR SQUARE POLE




CAT #	SIZE	MATERIAL
PB-2A3	3"	Steel
PB-2A4	4"	Steel
PB-2A5	5"	Steel
PB-2A6	6"	Steel

TRIPLE MOUNT FOR SQUARE POLE




CAT #	SIZE	MATERIAL
PB-3A3	3"	Steel
PB-3A4	4"	Steel
PB-3A5	5"	Steel
PB-3A6	6"	Steel

QUAD 90° FOR SQUARE POLE



CAT #	SIZE	MATERIAL
PB-4A4(90)	4"	Steel
PB-4A5(90)	5"	Steel
PB-4A6(90)	6"	Steel

QUAD 180° FOR SQUARE POLE




CAT #	SIZE	MATERIAL
PB-4A4(180)	4"	Steel
PB-4A5(180)	5"	Steel
PB-4A6(180)	6"	Steel

## TENONS FOR ROUND POLE


**(PB Series)** Twin and Triple brackets for mounting over a round pole or tenon with an O.D. of 2-3/8". I.D. of base tube is 2.438".

TWIN MOUNT



CATALOG #
PB-2R2.375

TRIPLE MOUNT




CATALOG #
PB-3R2.375

## IN-LINE BRACKETS


**(PBD Series)** The square base of the steel PBD Series bracket is designed to be inserted into a 4" square, non-tapered steel pole. The bracket is supplied with end caps to enclose the wiring chamber, and with 1-1/2" direct mount arms to install the fixtures. Order fixture without mounting arm for use with this bracket. (Fixture Mounting Code "8").

TWIN MOUNT



CATALOG #
PBD-2A4

TRIPLE MOUNT



CATALOG #
PBD-3A4



Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# POLE TENONS Fixture Mounting Brackets

## ROUND EXTERNAL MOUNT

**(PT Series)** The round base of the cast aluminum PT Series bracket is designed to mount over a round pole or tenon ranging in size from 2-3/8 (60 mm) to 3 inches (76 mm) O.D. The PT Series brackets can be mounted on a square pole but require use of the Single Vertical Tenon (PB-1A or PA-1A). Fixtures mounted to these brackets can only be adjusted vertically.



SINGLE

CATALOG #

PT-1



90° TWIN

CATALOG #

PT-2(90)

Not for use with 22" housings



180° TWIN

CATALOG #

PT-2(180)



90° TRIPLE

CATALOG #

PT-3(90)

Not for use with 22" housings



120° TRIPLE

CATALOG #

PT-3(120)



90° QUAD

CATALOG #

PT-4(90)

Not for use with 22" housings

## SQUARE INTERNAL – HORIZONTAL

**(PD Series)** The square base of the PD Series aluminum bracket is designed to be inserted into square, non-tapered 4-inch steel or aluminum poles. Die formed end cap is supplied to enclose the wiring chamber. Fixtures mounted to these brackets can only be adjusted vertically.



90° TWIN

CATALOG #

PD-2A4(90)

Not for use with 22" housings



180° TWIN

CATALOG #

PD-2A4(180)



90° TRIPLE

CATALOG #

PD-3A4(90)

Not for use with 22" housings



90° QUAD

CATALOG #

PD-4A4(90)

Not for use with 22" housings



PT SERIES  
(ROUND EXTERNAL MOUNT)



PD SERIES  
(SQUARE INTERNAL - HORIZONTAL)

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# EFFECTIVE PROJECTED AREA (EPA) RATINGS – DIRECT MOUNT

## 1-1/2" CLOSE POLE MOUNT (0° TILT) – (MOUNTING CODE 1)

<b>CONFIGURATION NUMBER</b>	1	2	3	5	6
Square housing 12"	0.47	0.94	●	●	●
Square housing 16"	0.80	1.60	●	●	●
Square housing 22"	1.49	2.98	▲	▲	▲
Square housing 22" with Sag Lens (QV, VFT & VPR Series 250W & 400W PSMH)	1.58	3.16	▲	▲	▲
Square housing 22" with Sag Lens & back box (QV, VFT & VPR Series 1000W MH, 250W & 400W HPS)	1.64	3.28	▲	▲	▲
Wedge housing 16"	0.45	0.80	●	●	●
Wedge housing 22"	0.84	1.46	▲	▲	▲
Rectangular housing 16.0" x 9.3"	0.60	0.77	●	●	●

- For Configurations 3, 5 and 6, a 6" Extended Pole Mount must be used.
- ▲ For Configurations 3, 5, and 6 with a 22" square housing or 22" Wedge housing, a special 12" Extended Pole Mount must be used. See page 71.

## 6" EXTENDED POLE MOUNT (0° TILT) – (MOUNTING CODE 2)

<b>CONFIGURATION NUMBER</b>	1	2	3	5	6
Square housing 12"	0.55	1.10	0.92	1.40	1.84
Square housing 16"	0.95	1.90	1.50	2.25	3.00
Square housing 22"	1.64	3.28	▲	▲	▲
Square housing 22" with Sag Lens (QV, VFT & VPR Series 250W & 400W PSMH)	1.73	3.46	▲	▲	▲
Square housing 22" with Sag Lens & back box (QV, VFT & VPR Series 1000W MH, 250W & 400W HPS)	1.79	3.58	▲	▲	▲
Wedge housing 16"	0.53	0.96	0.93	1.41	1.86
Wedge housing 22"	0.99	1.76	▲	▲	▲
Rectangular housing 16.0" x 9.3"	0.60	1.06	0.93	1.27	1.86

- ▲ For Configurations 3, 5, and 6 with a 22" square housing or 22" Wedge housing, a special 12" Extended Pole Mount must be used. See page 71.

## 12" EXTENDED POLE MOUNT (ORDER SEPARATELY)

### FIXTURES AT 90° CONFIGURATION, ORDER FIXTURE WITHOUT ARM (MOUNTING CODE 8)

<b>CONFIGURATION NUMBER</b>	1	2	3	5	6
Square housing 22" with Flat Lens	1.79	3.58	3.03	4.61	6.06
Square housing 22" with Sag Lens (QV or VFT Series)	1.88	3.76	3.21	4.88	6.42
Square housing 22" with Sag Lens & back box (QV or VFT Series)	1.94	3.88	3.33	5.06	6.66

## FIXED 20° MOUNT – (MOUNTING CODE 5)

<b>CONFIGURATION NUMBER</b>	21	22	23	25	26
Square housing 12"	0.70	1.12	1.18	1.66	2.36
Square housing 16"	1.26	2.08	2.17	3.08	4.30
Square housing 22"	2.36	3.44	n/a	n/a	n/a
Rectangular housing 16.0" x 9.3"	0.88	1.24	1.50	2.12	3.00

## SIDE-ARM MOUNT (0° TILT) – (MOUNTING CODE 0)

<b>CONFIGURATION NUMBER</b>	1	2	3	5	6	7▼
Aviator 14.4" x 15.5"	0.62	1.24	1.06	1.67	2.11	1.45
Aviator 14.4" x 15.5" with Extended Arm (AVE-1)	1.05	2.10	1.49	2.54	2.98	2.15
Aviator 14.4" x 15.5" with Extended Upsweep Arm (AVU-1)	1.00	2.00	1.51	2.51	3.01	2.14
Aviator 18.5" x 19.6"	1.03	2.07	1.75	2.78	3.50	2.40
Aviator 18.5" x 19.6" with Extended Arm (AVE-2)	1.60	3.20	2.32	3.92	4.64	3.32
Aviator 18.5" x 19.6" with Extended Upsweep Arm (AVU-2)	1.52	3.03	2.35	3.87	4.70	3.29
AeroDome 20"	1.74	3.48	2.56	4.30	5.13	3.65
AeroDome 20" with External Backlight Shield	2.01	4.02	3.10	5.11	6.20	4.21
AeroDome 20" with External Backlight Shield – Full Cutoff	2.03	4.06	3.37	5.40	6.74	4.96
AeroDome 25"	2.59	5.18	3.87	6.46	7.74	5.52
AeroDome 25" with External Backlight Shield	2.65	5.30	4.37	7.02	8.74	6.44
AeroDome 25" with External Backlight Shield – Full Cutoff	3.06	6.13	5.20	8.27	10.40	7.69
AeroDome 25" with Frontline Backlight Shield	2.85	5.69	5.75	8.60	11.50	8.90

- ▼ Only for use on Round Tapered Poles, must be used with AVR P accessory. See page 69.

## IN-LINE BRACKET (PBD) – ORDER FIXTURE WITHOUT ARM (MOUNTING CODE 8)

<b>CONFIGURATION NUMBER</b>	2 FIXTURES	3 FIXTURES
Square housing 12"	1.39	2.33
Square housing 16"	1.88	3.00
Square housing 22"	3.02	4.62
Square housing 22" with Sag Lens (VFT Series)	3.11	4.71
Square housing 22" with Sag Lens & back box (VFT Series)	3.17	4.77
Rectangular housing 16.0" x 9.3"	1.49	2.38

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# EFFECTIVE PROJECTED AREA (EPA) RATINGS – DIRECT MOUNT

## SQUARE TUBE POST TOP – (MOUNTING CODE A, C, D or E)

CONFIGURATION NUMBER	A	C	D	E
Square housing 16" (QV Series)	2.23	2.23	n/a	n/a
Square housing 22" with Sag Lens (QV Series)	3.50	3.50	3.50	3.50
Square housing 22" with Sag Lens & back box (QV Series)	3.56	3.56	3.56	3.56

## ROUND TUBE POST TOP – (MOUNTING CODE F, H, I, J, K or M)

CONFIGURATION NUMBER	F	H	I	J	K	M
Square housing 16" (AC and PR Series)	n/a	n/a	n/a	n/a	1.21	1.21
Square housing 16" (QV Series)	1.21	1.21	n/a	n/a	n/a	n/a
AeroDome 20"	2.10	1.96	1.96	1.96	n/a	n/a
AeroDome 20" with External Backlight Shield	2.37	2.23	2.23	2.23	n/a	n/a
AeroDome 20" with External Backlight Shield - Full Cutoff	2.62	2.48	2.48	2.48	n/a	n/a
AeroDome 25"	2.69	2.55	2.55	2.55	n/a	n/a
AeroDome 25" with External Backlight Shield	3.13	2.99	2.99	2.99	n/a	n/a
AeroDome 25" with External Backlight Shield - Full Cutoff	3.55	3.41	3.41	3.41	n/a	n/a
AeroDome 25" with Frontline Backlight Shield	4.31	4.18	4.18	4.18	n/a	n/a

# EFFECTIVE PROJECTED AREA (EPA) RATINGS – TENONS & BRACKETS

## 2" ADJUSTABLE FITTER – 12" SQUARE HOUSING

CATALOG #	# FIXTURES	0°	10°	20°	30°	45°	60°	70°	80°	90°
PA/PB-1	1	0.61	0.65	0.77	0.84	0.91	1.07	1.16	1.20	1.21
PA/PB-2	2 in-line	2.82	2.89	3.14	3.28	3.41	3.73	3.91	3.99	4.01
PB-3	3 in-line	4.68	4.91	5.28	5.50	5.68	6.17	6.44	6.56	6.59
PB-4(90)	4 @ 90°	4.19	4.37	4.55	4.65	4.76	5.00	5.12	5.14	5.20
PB-4	4 in-line	6.54	6.93	7.42	7.71	7.95	8.60	8.97	9.13	9.17
PT-1	1	0.82	0.86	0.98	1.05	1.11	1.28	1.37	1.41	1.42
PT/PD-2(90)	2 @ 90°	1.26	1.41	1.52	1.58	1.62	1.77	1.84	1.87	n/a
PT/PD-2(180)	2 @ 180°	1.43	1.43	1.43	1.43	1.49	1.75	1.90	1.95	1.96
PT/PD-3(90)	3 @ 90°	1.87	2.02	2.13	2.19	2.23	2.38	2.45	2.48	n/a
PT-3(120)	3 @ 120°	1.70	1.89	2.21	2.36	2.47	2.76	3.08	3.16	3.16
PT/PD-4(90)	4 @ 90°	2.31	2.60	2.82	2.94	3.04	3.32	3.49	3.54	3.53
PW-1A3	1	1.08	1.12	1.24	1.31	1.38	1.54	1.63	1.67	1.68
PW-2A3	2	2.16	2.24	2.48	2.62	2.76	3.08	3.26	3.32	3.34

## 2" ADJUSTABLE FITTER – 16" SQUARE HOUSING

CATALOG #	# FIXTURES	0°	10°	20°	30°	45°	60°	70°	80°	90°
PA/PB-1	1	0.93	1.06	1.27	1.39	1.50	1.78	1.95	2.02	2.03
PA/PB-2	2 in-line	3.86	4.11	4.53	4.78	4.99	5.56	5.89	6.03	6.05
PB-3	3 in-line	6.35	6.87	7.51	7.88	8.19	9.04	9.55	9.76	9.79
PB-4(90)	4 @ 90°	5.84	6.17	6.49	6.67	6.83	7.25	7.50	7.60	7.62
PB-4	4 in-line	8.84	9.63	10.49	10.98	11.40	12.53	13.21	13.49	13.53
PT-1	1	1.14	1.26	1.48	1.60	1.71	1.99	2.16	2.23	2.24
PT/PD-2(90)	2 @ 90°	1.90	2.16	2.36	2.47	2.56	2.81	n/a	n/a	n/a
PT/PD-2(180)	2 @ 180°	2.09	2.09	2.10	2.34	2.40	2.84	3.08	3.18	3.19
PT/PD-3(90)	3 @ 90°	2.83	3.10	3.30	3.41	3.49	3.75	n/a	n/a	n/a
PT-3(120)	3 @ 120°	2.07	2.81	3.50	4.24	4.74	5.09	5.48	5.63	5.63
PT/PD-4(90)	4 @ 90°	3.57	4.13	4.53	4.72	4.90	5.42	n/a	n/a	n/a
PW-1A3	1	1.40	1.53	1.74	1.86	1.97	2.25	2.42	2.49	2.50
PW-2A3	2	2.80	3.06	3.48	3.72	3.94	4.50	4.84	4.98	5.00

## 2" ADJUSTABLE FITTER – 22" SQUARE HOUSING

CATALOG #	# FIXTURES	0°	10°	20°	30°	45°	60°	70°	80°	90°
PA/PB-1	1	1.62	1.94	2.34	2.56	2.74	3.26	3.57	3.69	3.69
PA/PB-2	2 in-line	5.63	6.28	7.07	7.51	7.87	8.91	9.51	9.77	9.77
PB-3	3 in-line	9.12	10.27	11.45	12.12	12.66	14.22	15.12	15.51	15.51
PB-4(90)	4 @ 90°	8.74	9.40	9.99	10.32	10.59	11.37	11.83	12.03	12.03
PB-4	4 in-line	12.62	14.27	15.84	16.73	17.45	19.53	20.73	21.25	21.25
PT-1	1	1.83	2.15	2.55	2.77	2.95	3.47	3.77	3.90	3.90
PT/PD-2(180)	2 @ 180°	3.45	3.45	3.87	3.99	4.23	4.97	5.44	5.60	5.60
PT-3(120)	3 @ 120°	3.33	3.68	4.97	5.33	5.51	6.41	n/a	n/a	n/a
PW-1A3	1	2.09	2.41	2.81	3.03	3.21	3.73	4.03	4.16	4.16
PW-2A3	2	4.18	4.82	5.62	6.06	6.42	7.46	8.06	8.32	8.32

\* These values must be multiplied by this ratio:  $\frac{\text{Fixture Mounting Height}}{\text{Total Pole Height}}$

## 2" ADJUSTABLE FITTER – ECONOMY FLOOD (EXCLUDES COMPACT)

CATALOG #	# FIXTURES	0°	10°	20°	30°	45°	60°	70°	80°	90°
PA/PB-1	1	0.78	0.88	1.02	1.09	1.14	1.34	1.45	1.53	1.61
PA/PB-2	2 in-line	3.54	3.75	4.04	4.18	4.28	4.67	4.90	5.05	5.21
PB-3	3 in-line	6.03	6.34	6.77	6.98	7.13	7.72	8.06	8.29	8.52
PB-4(90)	4 @ 90°	4.87	5.34	5.77	5.99	6.13	6.72	7.07	7.30	7.53
PB-4	4 in-line	8.51	8.95	9.50	9.78	9.97	10.76	11.23	11.53	11.84
PT-1	1	0.99	1.09	1.23	1.30	1.35	1.55	1.66	1.74	1.82
PT/PD-2(90)	2 @ 90°	1.40	1.58	1.73	1.81	1.90	2.14	n/a	n/a	n/a
PT/PD-2(180)	2 @ 180°	1.76	1.76	1.76	1.76	1.76	2.04	2.20	2.33	2.44
PT/PD-3(90)	3 @ 90°	2.08	2.26	2.41	2.49	2.58	2.86	n/a	n/a	n/a
PT-3(120)	3 @ 120°	2.02	2.37	2.57	2.63	2.64	2.98	3.08	3.26	3.33
PT/PD-4(90)	4 @ 90°	2.74	3.09	3.37	3.52	3.66	4.11	n/a	n/a	n/a
PW-1A3	1	1.25	1.35	1.49	1.56	1.61	1.81	1.92	2.00	2.08
PW-2A3	2	2.49	2.70	2.98	3.13	3.22	3.62	3.85	4.00	4.15

## 2" ADJUSTABLE FITTER – RECTANGULAR HOUSING

CATALOG #	# FIXTURES	0°	10°	20°	30°	45°	60°	70°	80°	90°
PA/PB-1	1	0.65	0.79	0.91	0.96	0.99	1.14	1.36	1.22	1.21
PA/PB-2	2 in-line	2.89	3.17	3.41	3.51	3.57	3.87	4.31	4.03	4.01
PB-3	3 in-line	4.91	5.33	5.69	5.84	5.93	6.38	7.04	6.62	6.59
PB-4(90)	4 @ 90°	4.11	4.53	4.89	5.04	5.13	5.58	6.24	5.82	5.79
PB-4	4 in-line	6.93	7.49	7.97	8.17	8.29	8.89	9.77	9.21	9.17
PT-1	1	0.86	1.00	1.12	1.17	1.20	1.35	1.57	1.43	1.42
PT/PD-2(90)	2 @ 90°	1.32	1.45	1.56	1.60	1.61	1.74	n/a	n/a	n/a
PT/PD-2(180)	2 @ 180°	1.24	1.35	1.52	1.59	1.64	1.85	2.17	1.97	1.95
PT/PD-3(90)	3 @ 90°	1.84	1.97	2.08	2.11	2.13	2.25	n/a	n/a	n/a
PT-3(120)	3 @ 120°	2.27	2.41	2.53	2.57	2.61	2.75	2.98	2.84	2.83
PT/PD-4(90)	4 @ 90°	2.44	2.70	2.91	2.98	3.02	3.26	n/a	n/a	n/a
PW-1A3	1	1.12	1.26	1.38	1.43	1.46	1.61	1.83	1.69	1.68
PW-2A3	2	2.24	2.52	2.76	2.86	2.92	3.22	3.66	3.38	3.36

## WHY IS EPA IMPORTANT?









Effective Projected Area—or EPA—is a rating assigned to a pole-mounted lighting fixture based on the fixture or pole's surface area and shape. The EPA is used to calculate wind loading to determine the proper pole size needed to support a fixture in outdoor applications. EPA maps (as seen on pages 75 and 77) indicate approximate maximum wind zones throughout the United States. Base wind velocities are established using a 50-year recurring mean.

Note that the wind map has several shaded areas designated as Special Wind Regions. In these areas, the magnitudes of the local wind speeds are dramatically affected by local conditions. These special wind regions include mountainous terrain, gorges, and other geographic areas that produce exceptional wind velocities. Poles located in a special wind region may be subjected to wind speeds that are higher than those indicated in the surrounding area. Wind speeds in these special regions should be determined by consulting the authority with local jurisdiction in that particular area, or through the analysis of local meteorological conditions.

**NOTE:** Hanging signs, banners and flags on poles change the EPA rating and increase vibration. The EPA ratings data provided in this catalog does not allow for this added stress which could result in pole or fixture failure.



# CANOPY & PARKING STRUCTURE

		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	OPTICAL PATTERN	PAGE NUMBER
DIRECT MOUNT	 <b>CL SERIES</b>	Canopy Light	70W – 400W HID 26W – 42W CFL		Page 83
	 <b>QV SERIES</b>	Square Vertical-Lamp Symmetric Parking Structure	70W – 150W HID		Page 85
	 <b>SE7 SERIES</b>	Square Up/Down Parking Structure Light	100W – 150W HID		Page 86
RECESSED	 <b>RC SERIES</b>	Recessed Canopy Light	70W – 150W HID		Page 84




# CL SERIES by RUUD LIGHTING DIRECT

## CANOPY LIGHT

The CL Series fixtures are available in 12-, 16- and 22-inch square and feature seamless, aluminum die-cast housings. These highly efficient fixtures feature precision specular reflectors that provide cutoff distribution for maximum light levels. A flat crystal #73, tempered glass lens is standard.


STANDARD IN WHITE FINISH

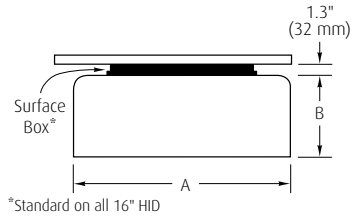

\*Standard on all 16" HID

"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

### OPTICAL PATTERN

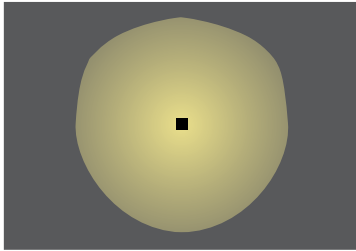

**APPLICATIONS:** Canopy, soffit, freezer & cooler, multipurpose room lighting or for projects that require shallow housings.

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MCL*407-M
100W PSMH	12"	MCL*410-M
150W PSMH <sup>▲</sup>	12"	MCL*615-M
250W PSMH <sup>†</sup>	16"	CL*625-M
250W PSMH	22"	CL06925-M
320W PSMH	22"	CL06932-M
400W PSMH	22"	CL06940-M
70W HPS	12"	MCL*507-M
100W HPS	12"	MCL*510-M
150W HPS <sup>▲</sup>	12"	MCL*515-M
250W HPS <sup>†</sup>	16"	CL*525-M
250W HPS	22"	CL0592-M
400W HPS	22"	CL0594-M
26/32/42W CFL <sup>▼</sup>	12"	MCL*242-U

<sup>†</sup> SB-16 Surface Box accessory is standard

<sup>▲</sup> SB-16 accessory required if mounting to a combustible surface.

<sup>▼</sup> Specify lamp wattage for included lamp. Consult factory for discrete wattage labeling to meet state and/or local regulations where applicable.

### MOUNTING CODES

Insert Code at \* in Catalog Number



0 = Direct Mount

7 = Quick Mount (n/a on 22" housings)  
12" Housings  
16" Housings

SEE PAGE 87 FOR MORE INFORMATION ABOUT THESE MOUNTINGS



22" fixtures are IP54






for Wet Locations

Quick Mount (mounting code 7) is listed for Damp Locations

## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (70W-150W HPS, 12" housing only)	1	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
(150W-400W PSMH, 250W & 400W HPS only)	5	
(70W-100W HPS only)	5	
(150W HPS only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W-400W PSMH, 250W-400W HPS)	T	
(70W-150W HPS and 70W & 100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor or fluorescent) (delay-relay type) (includes 100W Q lamp)		Q
<b>Glass Drop Prismatic Lens</b> (12" or 16" only) (1-3/4" [44 mm] deep)		A
<b>Ballast Noise Suppressor</b> (n/a 277V reactor)		N
<b>Tamperproof Lens Fasteners</b>		J

## FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER
 <b>Wire Guard</b> 12" Housing 16" Housing 22" Housing	FWG-12 FWG-16 FWG-22
 <b>Surface Box</b> 12" and 22" Housing (standard on 16" Housing; required on 12" 150W if mounting to combustible surface)	SB-16
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 87 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




STANDARD IN WHITE FINISH



"A"	"B"	"C"
12" Square (305 mm)	13.88" (353 mm)	5.0" (127 mm)
16" Square (406 mm)	17.88" (454 mm)	6.5" (165 mm)

### OPTICAL PATTERN

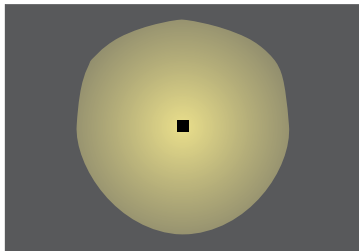

## RECESSED CANOPY LIGHT

RC Series fixtures are 12- and 16-inches square and feature a seamless, aluminum die-cast housing. This highly efficient fixture features a precision specular reflector that provides cutoff distribution for maximum light levels. A crystal #73, flat tempered glass lens is standard.

**APPLICATIONS:** Canopy illumination, soffit lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MRC0407-1
100W PSMH	12"	MRC0410-1
150W PSMH	12"	MRC0615-1
150W PSMH	16"	RC0615-1
70W HPS	12"	MRC0507-1
100W HPS	12"	MRC0510-1
150W HPS	12"	MRC0515-1
150W HPS	16"	RC0515-1
26/32/42W CFL <sup>▲</sup>	12"	MRC0242-U


<sup>▲</sup> Specify lamp wattage for included lamp. Consult factory for discrete wattage labeling to meet state and/or local regulations where applicable.



## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Ballast</b> (standard on CFL) (PSMH & 150W HPS in 16" housing) (70W-150W HPS in 12" housing)	2 2		
<b>208V Ballast</b> (standard on CFL) (PSMH & 150W HPS in 16" housing) (70W-150W HPS in 12" housing)	3 3		
<b>240V Ballast</b> (standard on CFL) (PSMH & 150W HPS in 16" housing) (70W-150W HPS in 12" housing)	4 4		
<b>Canada 347V Ballast</b> (n/a CFL) (150W PSMH & 150W HPS in 16" housing) (70W & 100W PSMH) (70W-150W HPS in 12" housing)	6 6 6		
<b>Single Fuse</b> (120V, 277V, or 347V)	1, 2 or 6	F	
<b>Dual Fuse</b> (208V or 240V) (n/a Canada)	3 or 4	F	
<b>Quartz Standby</b> (delay-relay type) (includes 100W Q lamp)		Q	
<b>Glass Drop Prismatic Lens</b> (12" housing only) (Lens is 1-3/4" [44 mm] deep)		A	


## FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>2 x 2 Lay-in Panel</b> 12" Housing 16" Housing	LPF-12 LPF-16

SEE PAGE 87 FOR MORE INFORMATION ABOUT THIS ACCESSORY

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)


## SQUARE VERTICAL-LAMP SYMMETRIC PARKING STRUCTURE



\*Surface box is optional

"A"	"B"
16" (406 mm) Square	6.5" (165 mm)

### OPTICAL PATTERN

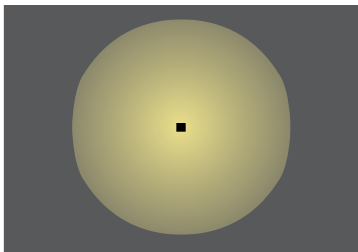

The QV Series fixture is 16-inches square and features a seamless, aluminum die-cast housing. The Type V optical system uses a vertically positioned, medium-base lamp and provides great uniformity. A clear tempered glass lens is secured in a hinged, gasketed frame. Direct or quick mount options available.


**APPLICATIONS:** Parking structure, canopy and soffit lighting

#### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16"	QV*407-M
100W PSMH	16"	QV*410-M
150W PSMH	16"	QV*615-M
70W HPS	16"	QV*507-M
100W HPS	16"	QV*510-M

#### MOUNTING CODES

Insert Code at \* in Catalog Number



**0** = Direct Mount

**7** = Quick Mount

SEE PAGE 87 FOR MORE INFORMATION ABOUT THESE MOUNTINGS



Quick Mount (mounting code 7) is listed for Damp Locations

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (150W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W PSMH only)	5		
(150W PSMH only)	5		
(HPS)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W PSMH only)	T		
(70W-100W HPS and 70W & 100W PSMH only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor or fluorescent) (delay-relay type) (includes 100W Q lamp)		Q	
<b>36" Cord</b> (for use with PD-20BZ bracket) (n/a for Quick Mount)		K	
<b>Tamperproof Lens Fasteners</b>		J	

### FIELD-INSTALLED ACCESSORIES

DESCRIPTION	CATALOG NUMBER
 <b>Wire Guard</b>	FWG-16
 <b>Surface Box</b>	SB-16
 <b>Parking Deck Bracket</b> (not for use with Quick Mount, option 7)	PD-20BZ
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 87 FOR MORE INFORMATION ABOUT THESE ACCESSORIES




# SE7 SERIES by RUUD LIGHTING DIRECT

## SQUARE UP/DOWN PARKING STRUCTURE LIGHT

The SE7 fixture is 12-inches square and features an aluminum die-cast ballast housing. A clear lens encloses a specular aluminum reflector that provides ceiling illumination as well as wide, uniform light distribution reducing the dark cavity effect and delivering uniform light distribution. A virtually unbreakable polycarbonate lens is UV-stabilized to minimize yellowing.

Minimum 150°C Supply Conductors  
Required for PSMH; 125°C for HPS.




**APPLICATIONS:** Parking structure, canopy and soffit lighting

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	MOUNTING POSITION	CATALOG NUMBER
100W PSMH	12"	Ceiling/Soffit	SE7410-M
150W PSMH	12"	Ceiling/Soffit	SE7615-M
100W HPS	12"	Ceiling/Soffit	SE7510-M
150W HPS	12"	Ceiling/Soffit	SE7515-M

### OPTICAL PATTERN

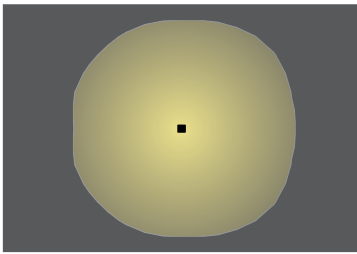

Quick Mount, option "B"  
10.18"L x 5.75"W x 1.56"D





for Wet Locations

Quick Mount (option B) is listed for Damp Locations

### FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>120V Reactor Ballast</b> (HPS only)	1	
<b>277V Reactor Ballast</b> (150W PSMH only)	27	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (150W PSMH only)	T	
(HPS & 100W PSMH only)	T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V or 240V) (n/a Canada)	3 or 4	F
<b>Button Photocell</b> (277V Reactor, 120V, 277V, 208V, 240V or 347V)	27, 1, 2, 3, 4 or 6	P
<b>Quartz Standby</b> (n/a 277V Reactor) (delay-relay type) (includes 100W Q lamp)		Q
<b>Quick Mount</b> (Damp Listed)		B
<b>24" Cord</b> (for use with PD-10BZ bracket)		K
<b>Tamperproof Lens Fasteners</b>		J

### FIELD-INSTALLED ACCESSORIES


DESCRIPTION	CATALOG NUMBER
 <b>Parking Deck Bracket</b> (not for use with Quick Mount, option "B")	PD-10BZ
 <b>Tamperproof Screwdriver</b>	TPS-1

SEE PAGE 87 FOR MORE INFORMATION ABOUT THESE ACCESSORIES

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

# CANOPY & PARKING STRUCTURE Mounting Options & Accessories

## QUICK MOUNT



For use with CL7, QV7 and SE7 fixtures. A steel tray in black epoxy e-coat mounts directly to the ceiling or to a 4-inch octagon or square recessed junction box. Three conduit knockouts are provided on each of the long sides of the tray: (2) for 1/2-inch and (1) for 3/4-inch. A 2-inch conduit opening is provided in the center of the tray. A hinge bracket attached to the fixture simply hooks into a slot in the tray, supporting the fixture while the electrical connection is made. The fixture then swings up into place and a latch on the housing attaches it to the tray. Two #8 screws are provided to secure the fixture. For 12-inch square housings, 5.8"W x 10.2"L x 1.6"D (146 x 259 x 40 mm); For 16-inch square housings, 5.8"W x 13.7"L x 1.6"D (146 x 347 x 40 mm). UL and cUL Listed for damp locations.

## SURFACE BOX



For CL and QV Series. This die-cast aluminum box has five threaded and closed 1/2" conduit entries for surface wiring. Supplied with our Colorfast DeltaGuard® finish with a black ultra-durable powder topcoat. Four #8-32 threaded stud and hex nuts included for ease of installation. Measures 11.3"L x 8"W x 1.3"H (286 x 203 x 32 mm).

CATALOG #
SB-16

## WIRE GUARD



For CL and QV Series. Steel guard provides protection to optical system of any outdoor or square commercial fixture with 12", 16" or 22" housing (except CL Series with drop lens). Attaches easily to lens frame with supplied #8 fasteners. Finished with an acrylic black E-coat paint. 1" (25 mm) space between wires.

CATALOG #	HOUSING	PRICE
FWG-12	12"	\$8
FWG-16	16"	\$11
FWG-22	22"	\$16

## PARKING DECK BRACKET



For SE7 Series. "K" option required. Fabricated aluminum bracket suspends fixture 10" (254 mm) below ceiling to clear concrete "T" construction. The bracket includes holes on each side for easy mounting to fixture.

CATALOG #	PRICE
PD-10BZ	\$23

## PARKING DECK BRACKET



For 16" CL and QV Series. "K" option required. Fabricated aluminum bracket adjusts vertically from 11" (279 mm) up to 20" (508 mm). Suspends fixture to clear concrete "T" construction. For white finish, specify PD-20WH.

CATALOG #	PRICE
PD-20BZ	\$46

## 2 X 2 LAY-IN PANEL



For RC Series. The field-installed lightweight steel Lay-in Panel accessory replaces a standard 24" square recessed ceiling tile, and supports the fixture. It is finished with a white ultra-durable powder coat paint.









CATALOG #
LPF-12
LPF-16

## TAMPERPROOF SCREWDRIVER




For use with the CL, SE7 and QV Series with Tamperproof Lens Fasteners.

CATALOG #
TPS-1

		DESCRIPTION	LAMP SOURCE	REMOTE CAPABLE OPTION	PAGE NUMBER
EXIT & EMERGENCY	 <b>EXD SERIES</b>	Plastic LED Exit Sign	High Brightness LEDs	No	Page 89
	 <b>EXE SERIES</b>	Edge Lit LED Exit Sign	High Brightness LEDs	No	Page 89
	 <b>EXDM SERIES</b>	Emergency Light & LED Exit Sign	High Brightness LEDs and 5.4W Incandescent	Yes	Page 89
	 <b>EM11/22 SERIES</b>	Emergency Light	5.4W Wedge-Based Incandescent	Yes	Page 90
	 <b>EM11LP SERIES</b>	Low Profile Emergency Light	5.4W Wedge-Based Incandescent	No	Page 90
	 <b>EMDE SERIES</b>	Wet Listed Emergency Light	6W G4 Xenon	No	Page 90
	 <b>EM50/100 SERIES</b>	50/100-watt Emergency Light	7.2W Wedge-Based Incandescent	Yes	Page 91
REMOTES	 <b>EMR SERIES</b>	Indoor and Outdoor Remote Heads	5.4W or 9W Wedge-Based Incandescent	—	Page 91






## EXD SERIES by RUUD LIGHTING DIRECT

### PLASTIC LED EXIT SIGN

EXD Series signs are easy to install, are available with red 6-inch letters and can be used as a single or double face sign. A sealed, maintenance-free nickel cadmium rechargeable battery provides a minimum of 90 minutes of emergency power. Fixtures are listed for dry or damp locations. EXD Series fixtures feature high-impact thermoplastic ABS housings and can be wall or ceiling mounted with the use of the included mounting canopy.

DESCRIPTION	CATALOG NUMBER
Red Letters, AC with Battery Backup	EXDBRWH
Green Letters, AC with Battery Backup	EXDBGWH

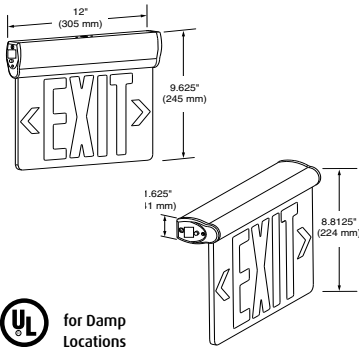


## EXE SERIES by RUUD LIGHTING DIRECT

### EDGE LIT LED EXIT SIGN

EXE Series signs are easy to install, are available with red 6-inch letters and are sold in a single- or double-face version. A sealed, maintenance-free nickel cadmium rechargeable battery provides a minimum of 90 minutes of emergency power. Fixtures are listed for dry or damp locations. Can be wall (side or back) or ceiling mounted with the use of the included black mounting canopy.

DESCRIPTION	CATALOG NUMBER
Red Letters, Single Face, AC with Battery Backup	EXESBRA
Red Letters, Double Face, AC with Battery Backup	EXEDBRA
Green Letters, Single Face, AC with Battery Backup	EXESBGA
Green Letters, Double Face, AC with Battery Backup	EXEDBGA



## EXDM SERIES by RUUD LIGHTING DIRECT


### EMERGENCY LIGHT/LED EXIT SIGN

The EXDM Series emergency light includes two 6-volt, 5.4-watt tungsten (T5 wedge base) lamps. The housing is injection-molded of UL94V-0 flame-retardant impact resistant thermoplastic ABS plastic. The exit sign features two LED bars available with red 6-inch letters, single or double face. A sealed, maintenance-free lead calcium rechargeable battery provides a minimum of 90 minutes. Fixtures are listed for dry or damp locations. An automatic low-voltage disconnect protects the battery from deep discharge. A mounting canopy is included with all fixtures.

#### LAMPS INCLUDED

DESCRIPTION	CATALOG NUMBER
Red Letters, AC with Battery Backup	EXDMBRWH
Red Letters, AC w/Battery Backup, 12W Remote Capability▲	EXDMBRRWH
Green Letters, AC with Battery Backup	EXDMBGWH
Green Letters, AC w/Battery Backup, 12W Remote Capability▲	EXDMBGRWH

▲ Choose from EMRH Series Remote Head options on page 91



## EM11/22 SERIES by RUUD LIGHTING DIRECT


### EMERGENCY LIGHT

The EM11/22 Series emergency light includes two 6-volt, 5.4-watt T5 wedge base lamps. The housing is injection-molded of UL94V-0 flame-retardant impact resistant thermoplastic ABS plastic. A sealed, 6-volt, sealed lead calcium battery operates both lamps for a minimum of 90 minutes. Fixtures are listed for dry or damp locations. EMP11/22 Series fixtures can be mounted to a wall-recessed junction box with a universal back plate or ceiling mounted.

#### LAMPS INCLUDED

DESCRIPTION	CATALOG NUMBER
White Housing, AC with Battery Backup	EM11SWH
White Housing, AC with Battery Backup, 11W Remote Capability <sup>▲</sup>	EM22RWH

<sup>▲</sup> Choose from EMRH Series Remote Head options on page 91




## EM11LP SERIES by RUUD LIGHTING DIRECT

### LOW PROFILE EMERGENCY LIGHT

The EM11LP Series includes two 6-volt, 5.4-watt T5 wedge-based incandescent lamps. The housing is injection-molded of UL94V-0 flame-retardant impact resistant thermoplastic ABS plastic. Fixtures are listed for dry or damp locations. A sealed, 6-volt, lead-calcium battery operates both lamps for a minimum of 90 minutes after a power outage. EM11LP Series fixtures are suitable for either wall or ceiling mounting.

#### LAMPS INCLUDED

DESCRIPTION	CATALOG NUMBER
White Housing, AC with Battery Backup	EM11LPWH



## EMDE SERIES by RUUD LIGHTING DIRECT


### WET LISTED EMERGENCY LIGHT

The EMDE Series fixtures include two 6-volt, 6-watt 2-pin G4 Xenon lamps. Fixtures have a polycarbonate lens and mirrored reflector. A silicone sponge gasket between the die-cast aluminum housing halves assures a watertight seal. A maintenance-free, nickel-cadmium 6-volt battery operates both lamps for a minimum of 90 minutes. Fixtures are listed for wet locations and mount directly to a recessed junction box. Cold location fixtures operate to -20°C.

#### LAMPS INCLUDED

DESCRIPTION	CATALOG NUMBER
Bronze Housing, AC w/Battery Backup	EMDEBZ
White Housing, AC w/Battery Backup	EMDEWH
Bronze Housing, AC w/Battery Backup, Cold Location	EMDECBZ
White Housing, AC w/Battery Backup, Cold Location	EMDECW

Spec sheets are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



# EM50/100 SERIES by **RUUD LIGHTING DIRECT**

## 50/100-WATT EMERGENCY LIGHT

The EM50/100 Series includes two 6-volt, 7.2-watt T5 wedge-based incandescent lamps. The housing is injection-molded, ABS white virgin plastic. Fixtures are listed for dry or damp locations. A sealed, 6-volt, lead-calcium battery operates both lamps for a minimum of 90 minutes after a power outage. 50-watt has 35-watt remote capability; 100-watt has 85-watt capability. 1/2" knockouts for conduit feed on top or back. 3/8" knockouts for conduit feed on side.

### LAMPS INCLUDED

DESCRIPTION	CATALOG NUMBER
50-watt, 6-volt	EM50RWH
100-watt, 6-volt	EM100RWH


▲ Choose from EMRH Series Remote Head options below




Single Head - Indoor



Dual Head - Indoor



Single Head - Outdoor



Dual Head - Outdoor



# EMR SERIES by **RUUD LIGHTING DIRECT**





## INDOOR AND OUTDOOR REMOTE HEADS

The EMR Series remote heads feature injection-molded, UL94V-0 flame retardant, ABS virgin plastic housings. Mounting hardware and plate for 3" or 4" box is included. Use these remote heads with the EXDM Series Emergency Light/LED Exit Sign, EM22 Emergency Light, and EM50/100 Series Emergency Light.

### LAMP(S) INCLUDED

DESCRIPTION	CATALOG NUMBER
5.4-watt, Square Single Head, Indoor	EMRHS5DW
9-watt, Square Single Head, Indoor	EMRHS9DW
5.4-watt, Square Dual Head, Indoor (10.8-watts total)	EMR20506WH
9-watt, Square Dual Head, Indoor (18-watts total)	EMR20906WH
5.4-watt, Round Single Head, Outdoor	EMRHS5WW
9-watt, Round Single Head, Outdoor	EMRHS9WW
5.4-watt, Round Dual Head, Outdoor (10.8-watts total)	EMRHD5WW
9-watt, Round Dual Head, Outdoor (18-watts total)	EMRHD9WW

Spec sheets are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

		DESCRIPTION	AVAILABLE WATTAGES AND LAMP TYPES	PAGE NUMBER
FLUORESCENT	 <b>U SERIES</b>	Indirect Linear Fluorescent	54W T5HO 28W T5	Pages 93-96
HID	 <b>ACU SERIES</b>	Square Forward Throw Indirect Light	70W - 1000W HID	Page 97
	 <b>LACU SERIES</b>	Rectangular Forward Throw Indirect Light	70W - 150W HID	Page 98
	 <b>WACU SERIES</b>	Wedge Forward Throw Indirect Light	70W - 400W HID	Page 99

# U SERIES

## HOUSING

The die-formed steel housing has a perforated bottom, and features riveted, heavy-duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and are factory installed. DeltaGuard® finish is standard on housing and end caps.

## BALLAST/WIRE MANAGEMENT CHANNEL

Die-formed pre-painted steel prevents wires from becoming visible from below the ceiling.

## REFLECTOR

Die-formed, super high efficiency, specular aluminum reflectors are retained in place with two ¼ turn fasteners for ease of servicing.

## LAMPS

The Indirect Linear Fluorescent Series has been specifically designed for use with energy-efficient T5 and T5HO lamp technology, which has great lumen maintenance and provides excellent color consistency. Each fixture comes standard with lamps.

## BALLAST

Standard with a programmed-start electronic ballast for optimal life and performance. It is standard with Universal 120- to 277-volt operation.

## MOUNTING KITS

The mounting kits are equally flexible in design and ease of installation. Feed points are provided with 4-5/8" diameter canopy and are available for direct attachment to a flush ceiling junction box, or direct attachment to a T-bar grid for wiring below the ceiling line.


The non-feed mounting kits are easy to install and available with either 4-5/8" or a 2" diameter canopy for direct attachment to hard ceiling surfaces or T-bar suspended ceilings.

Pendant system is a heavy duty seamless, 1/4" NPS threaded, steel tubing and comes standard in 6" increments from a 12" minimum through 36" maximum. Pendants thread into factory-installed coupler on Individual, Start, or End Sections.


Aircraft cable system is high strength, stainless steel cable with fixture leveling and height adjustability in the field. It is offered in two styles; single cable and "Y" cable configuration. Standard offering has a choice of three suspension ranges: 12" through 27", 28" through 47", and 48" through 70".




### DIRECTLY OVER T-BAR CABLE MOUNT

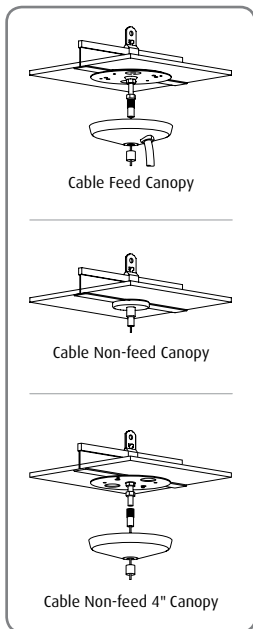

### DIRECTLY OVER T-BAR PENDANT MOUNT

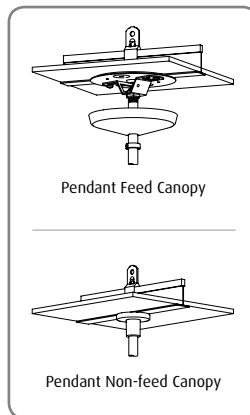

### OVER J-BOX/IN-BETWEEN T-BAR CABLE MOUNT

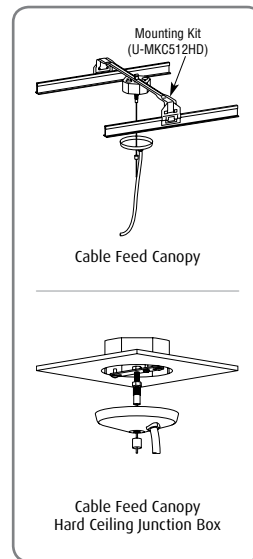




## INDIRECT LINEAR FLUORESCENT



Designed to fit many applications, the Indirect Linear Fluorescent series has a perforated housing and is available in 4-, 8-, and 12-foot lengths.

**APPLICATIONS:** Classroom, office, multi-purpose rooms


"A"	
4-foot	48" (122 cm)
8-foot	96" (244 cm)
12-foot	144" (366 cm)

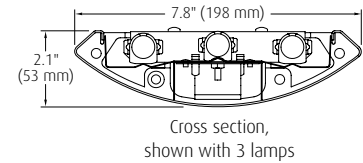

**SEE PAGE 96 FOR  
UP SERIES QUOTING &  
ORDERING FORM**



ILLUSTRATION SHOWS A 12' CONTINUOUS RUN MADE UP OF 4-FOOT FIXTURES

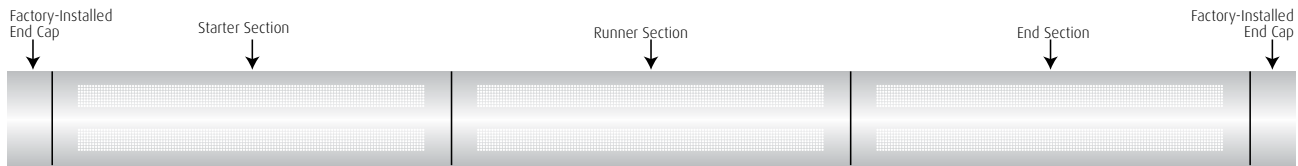

Continuous runs lock together using the Mate-N-Lok® technology.

### END CAP STYLES



BULL NOSE



WING

### MOUNTING OPTIONS



PENDANT



CABLE



Y-CABLE

### LAMP OPTIONS



1 LAMP



2 LAMPS



3 LAMPS

### EXAMPLE OF TYPICAL INSTALLATION

Installation example shows a single 32' run. The 8' fixtures feature 2 x 54W T5HO 4100K lamps and the wing end cap style. Fixtures are cable hung with an adjustable 12" to 27" range of aircraft cable. Feed kits mount over a junction box on a hard ceiling and feature same-sized canopies.

#### LAMPS INCLUDED


QTY	DESCRIPTION	CATALOG NUMBER
1	8' Starter	UP8E2X54-U4
2	8' Runners	UP8R2X54-U4
1	8' End	UP8J2X54-U4
1	Feed Mounting Kit	U-MKC27CA4WT
4	Non-Feed Mounting Kits	U-MKC27CN4WT

CALL CUSTOMER SERVICE AT  
**(800) 236-7000**  
FOR A SPECIALIZED QUOTE






# U SERIES PRODUCT ORDERING NUMBER SYSTEM

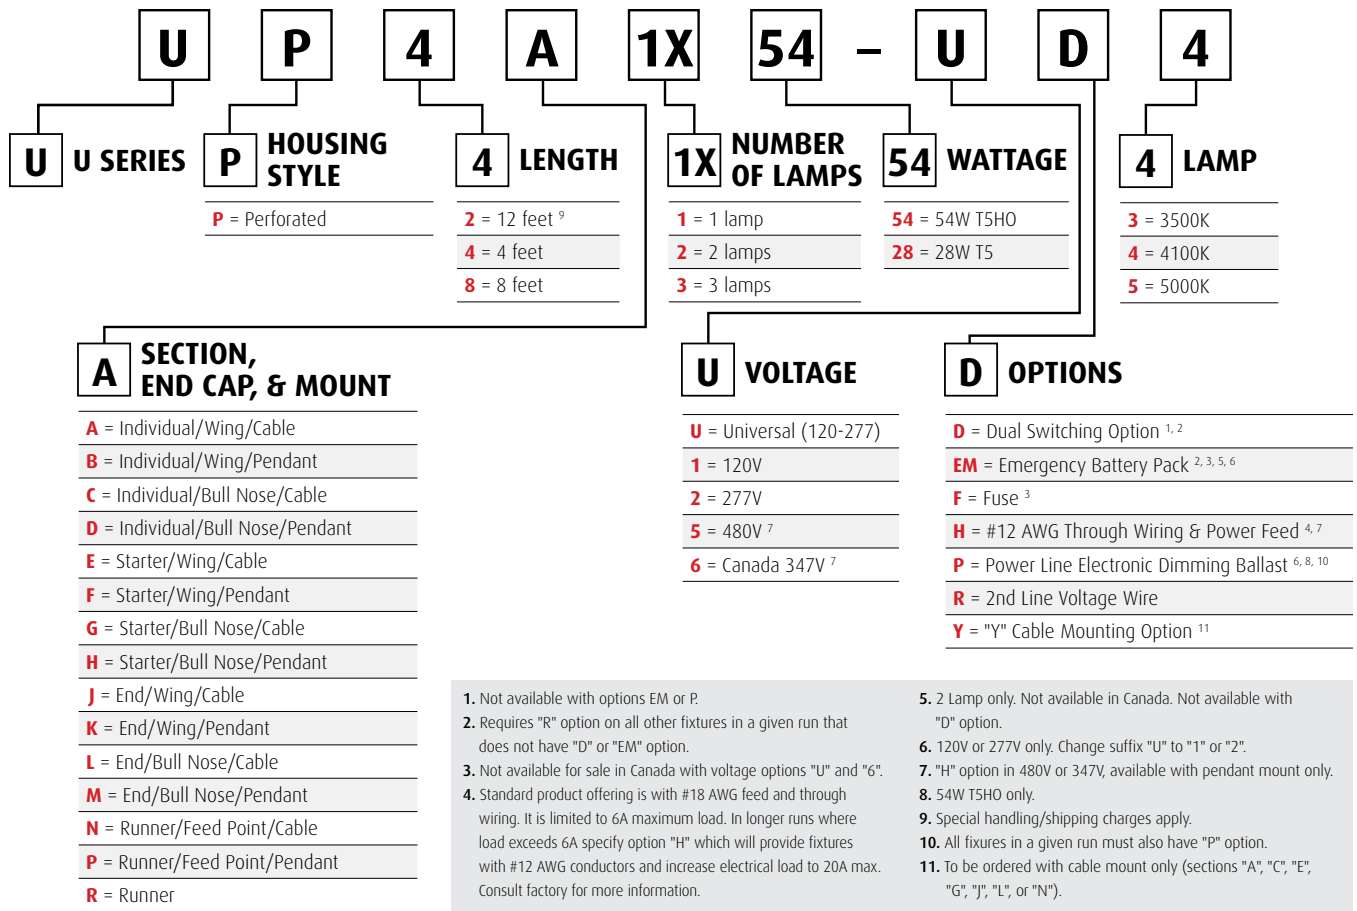

# U SERIES MOUNTING KITS ORDERING NUMBER SYSTEM

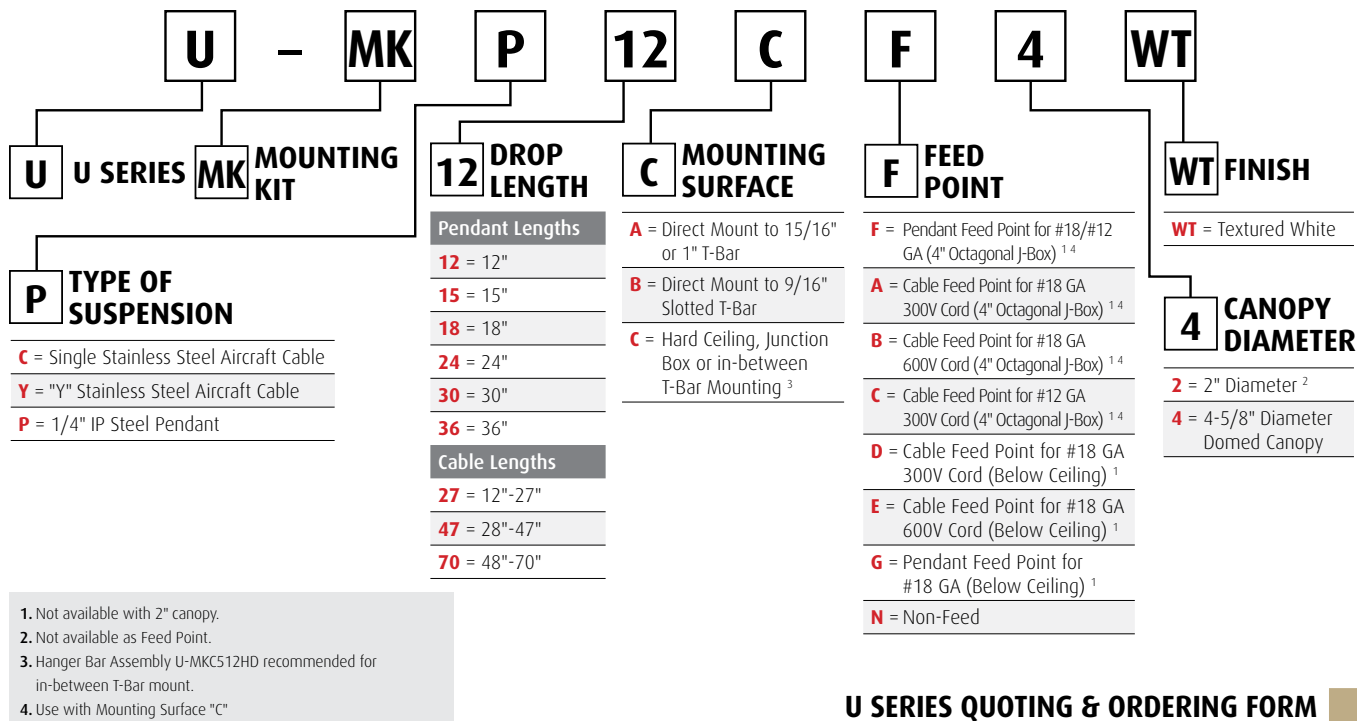

**U SERIES QUOTING & ORDERING FORM**

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## U SERIES QUOTING AND ORDERING FORM



It's easy to choose the right product for your project. Use this form and make copies for quick and simple ordering or quoting of indirect products. If you need additional assistance with your order, call Customer Service at **(800) 236-7000**.

NAME: \_\_\_\_\_  
 COMPANY: \_\_\_\_\_  
 JOB NAME: \_\_\_\_\_  
 PHONE NUMBER: \_\_\_\_\_  
 CUSTOMER NUMBER: \_\_\_\_\_

## RUN INFORMATION

QUANTITY	LENGTH	LENGTH PREFERENCE
3 Runs	32'	8-foot (Example)
8 Runs	4'	Individual (Example)

## FIXTURE INFORMATION (check one in each category)

**1 LENGTH PREFERENCE**  
 (if configuring a continuous run, complete **Run Information** above)

4-foot  
 8-foot  
 12-foot (special S&H applies)

**2 END CAP STYLE**

Wing  
 Bull Nose

**3 NUMBER OF LAMPS**

1 Lamp  
 2 Lamps  
 3 Lamps

**4 LAMP WATTAGE**

28W T5  
 54W T5HO (standard)

**5 LAMP COLOR TEMPERATURE**

3500K  
 4100K  
 5000K

**6 VOLTAGE**

120V     277V  
 208V     Canada 347V (T5HO only)  
 240V     480V (T5HO only)

**7 OPTIONS**

Dimming <sup>1</sup>  
 Dual Switching <sup>2</sup>  
 Emergency Battery Pack <sup>3, 4</sup>  
 Aircraft Y-Cable

Fusing <sup>3</sup>  
 #12 AWG Wiring <sup>5</sup>  
 2nd Line Voltage Wire <sup>6</sup>

1. Can reduce lamp life. 120V or 277V only.  
 2. Not available with Dimming or Emergency Battery Pack options.  
 3. Not available in Canada for 120V-277V & 347V.  
 4. Only available on 2-lamp models. 120V or 277V only. Not available with Dual Switching option.  
 5. Required for some continuous run applications (#12 AWG is standard).  
 6. Required for some dimming, dual switching, and emergency battery pack applications.

## MOUNTING KIT INFORMATION (check one in each category)

**1 MOUNTING KIT STYLE**

Aircraft Cable  
 Aircraft Y-Cable  
 Pendant

**2 DROP LENGTH**

Adjustable Cable/Y-cable	Fixed Pendant
<input type="checkbox"/> 12"-27"	<input type="checkbox"/> 12" <input type="checkbox"/> 24"
<input type="checkbox"/> 28"-47"	<input type="checkbox"/> 15" <input type="checkbox"/> 30"
<input type="checkbox"/> 48"-70"	<input type="checkbox"/> 18" <input type="checkbox"/> 36"

**3 MOUNTING SURFACE**

Hard Ceiling (J-box)  
 Drop Tile T-bar Ceiling  
 (if mounting to a drop tile ceiling, specify if you're mounting direct to acoustical panels, standard t-bar or slotted t-bar)

**4 FEED POINTS**

Wiring Above Ceiling  
 Wiring Below Ceiling  
 (#12 AWG-wired fixtures must be wired above the ceiling)

**5 NON-FEED CANOPY DIAMETER**

4-5/8" (standard on feeds)  
 2"

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)




# ACU SERIES by **RUUD LIGHTING DIRECT**

## SQUARE FORWARD THROW INDIRECT LIGHT

This compact forward throw reflector has a main beam of 60°+ from vertical (30° from horizontal), which provides uniform ceiling illumination with little spill light on the wall. An adjustable backlight shield is standard. A clear, tempered glass lens is held securely in a die-cast aluminum door frame. **NOTE:** Noise suppressor is standard on all fixtures except 320W PSMH and 1000W MH.

**STANDARD IN WHITE FINISH**

A Minimum of 150°C Supply Conductors Are Required.



"A"	"B"
12" (305 mm) Square	5.0" (127 mm)
16" (406 mm) Square	6.5" (165 mm)
22" (559 mm) Square	9.3" (235 mm)

**APPLICATIONS:** Classroom, office, multi-purpose rooms

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	12"	MACU407-M
100W PSMH	12"	MACU410-M
150W PSMH	12"	MACU615-M
250W PSMH	16"	ACU625-M
320W PSMH ⚡	16"	ACU632-M
1000W MH ⚡	22"	ACU499-M

⚡ Reduced envelope lamp. ED28 for 320W PSMH; BT37 for 1000W MH.



Supplied Wall Mount Box  
6" x 4" x 1.2"  
(152 mm x 102 mm x 30 mm)  
**NOT FOR USE IN WET LOCATIONS**




## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX		
<b>277V Reactor Ballast</b> (150W-320W PSMH only)	27			
<b>480V Ballast</b> (70W & 100W PSMH only)	5			
(150W-320W PSMH, 1000W MH only)	5			
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH only)	T			
(150W-320W PSMH, 1000W MH only)	T			
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F		
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F		
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q		



STANDARD IN WHITE FINISH

A Minimum of 150°C Supply Conductors Are Required.



## RECTANGULAR FORWARD THROW INDIRECT LIGHT

This compact forward throw reflector has a main beam of 60°+ from vertical (30° from horizontal), which provides uniform ceiling illumination with little spill light on the wall. An adjustable backlight shield is standard. A clear, tempered glass lens is held securely in a die-cast aluminum door frame. **NOTE:** Noise suppressor not available with this fixture.

**APPLICATIONS:** Classroom, office, multi-purpose rooms

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16.0" x 9.3"	LACU407-M
100W PSMH	16.0" x 9.3"	LACU410-M
150W PSMH	16.0" x 9.3"	LACU615-M



Supplied Wall Mount Box  
6" x 4" x 1.2"  
(152 mm x 102 mm x 30 mm)  
**NOT FOR USE IN WET LOCATIONS**




## FACTORY-INSTALLED OPTIONS

DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX
<b>277V Reactor Ballast</b> (150W PSMH only)	27	
<b>480V Ballast</b> (70W & 100W PSMH only)	5	
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH only) (150W PSMH only)	T T	
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q



**STANDARD IN WHITE FINISH  
SHOWN WITH OPTIONAL ACCENT STRIPE**

A Minimum of 150°C Supply  
Conductors Are Required.



"A"	"B"	"C"
16" Square (406 mm)	9.5" (241 mm)	5.1" (129 mm)
22" Square (559 mm)	13.4" (340 mm)	6.5" (165 mm)

## WEDGE FORWARD THROW INDIRECT LIGHT

This compact forward throw reflector has a main beam of 60°+ from vertical (30° from horizontal), which provides uniform ceiling illumination with little spill light on the wall. An adjustable backlight shield is standard. A clear, tempered glass lens is held securely in a die-cast aluminum door frame. **NOTE:** Noise suppressor is standard on all WACU Series fixtures.

**APPLICATIONS:** Classroom, office, multi-purpose rooms

### LAMP INCLUDED

LAMP WATTAGE	HOUSING SIZE	CATALOG NUMBER
70W PSMH	16"	WACU407-M
100W PSMH	16"	WACU410-M
150W PSMH	16"	WACU615-M
250W PSMH	22"	WACU6925-M
320W PSMH ⚡	22"	WACU6932-M
400W PSMH ⚡	22"	WACU6940-M

⚡ Reduced envelope lamp. ED28 for 320W & 400W PSMH.



Supplied Wall Mount Box  
6" x 4" x 1.2"  
(152 mm x 102 mm x 30 mm)  
**NOT FOR USE IN WET LOCATIONS**



for Damp  
Locations

## FACTORY-INSTALLED OPTIONS



DESCRIPTION	CHANGE SUFFIX TO	ADD AFTER SUFFIX	
<b>277V Reactor Ballast</b> (150W-400W PSMH only)	27		
<b>480V Ballast</b> (70W & 100W PSMH only)	5		
(150W-400W PSMH only)	5		
<b>Canada Tri-volt Ballast</b> (120/277/347V) (70W & 100W PSMH only)	T		
(150W-400W PSMH only)	T		
<b>Single Fuse</b> (277V Reactor, 120V, 277V, or 347V)	27, 1, 2 or 6	F	
<b>Dual Fuse</b> (208V, 240V, or 480V) (n/a Canada)	3, 4 or 5	F	
<b>Quartz Standby</b> (n/a 277V reactor) (delay-relay type) (includes 100W Q lamp)		Q	
<b>Accent Stripe</b> (note at end of catalog number prefix: G=Grey, R=Red (WACU615R-M))			





# FLUORESCENT & INCANDESCENT Replacement Lamps



Ruud Lighting Direct carries a wide selection of lamps from Luma Lamps. Choose from Single Tube, Double Tube-2 pin, Double Tube-4 pin, Triple Tube, Double D and Linear Fluorescent lamps and quartz halogen - all 100% satisfaction guaranteed.

CATALOG #	DESCRIPTION	BASE	INITIAL/MEAN LUMENS	AVERAGE RATED LIFE	CCT <sup>▲</sup> (K)	CRI	
<b>T8 Linear Fluorescent</b> <b>TCLP Compliant</b> 	<b>32W (3500K)</b>	F32W/T8/835	G13	2775/2600	20000	3500	82
	:LF32835C (case quantity = 25)						
	:LF32835HS (half skid quantity = 625)						
	:LF32835FS (full skid quantity = 1250)						
	<b>32W (4100K)</b>	F32W/T8/840	G13	2775/2600	20000	4100	82
	:LF32841C (case quantity = 25)						
	:LF32841HS (half skid quantity = 625)						
	:LF32841FS (full skid quantity = 1250)						
	<b>32W (5000K)</b>	F32W/T8/850	G13	2775/2600	20000	5000	82
:LF32850C (case quantity = 25)							
:LF32850HS (half skid quantity = 625)							
:LF32850FS (full skid quantity = 1250)							
<b>T5HO Linear Fluorescent</b> <b>TCLP Compliant</b> 	<b>54W (3500K)</b>	F54W/T5/835	G5	4950/4675	20000	3500	85
	:LF54835C (case quantity = 40)						
	:LF54835HS (half skid quantity = 600)						
	:LF54835FS (full skid quantity = 1200)						
	<b>54W (4100K)</b>	F54W/T5/840	G5	4950/4675	20000	4100	85
	:LF54841C (case quantity = 40)						
	:LF54841HS (half skid quantity = 600)						
	:LF54841FS (full skid quantity = 1200)						
	<b>54W (5000K)</b>	F54W/T5/850	G5	4950/4675	20000	5000	85
:LF54850C (case quantity = 40)							
:LF54850HS (half skid quantity = 600)							
:LF54850FS (full skid quantity = 1200)							

CATALOG #	DESCRIPTION	PINS	BASE	INITIAL/MEAN LUMENS	AVERAGE RATED LIFE	CCT <sup>▲</sup> (K)	CRI
<b>CFL Single Tube (2-pin)</b> 	<b>13W</b>						
	:CF13SA/27	CFT13W/GX23/827	2	GX23	820 / 700	10000	2700
<b>CFL Double Tube (2-pin)</b> 	<b>13W</b>						
	:CF13DA/27	CFQ13W/GX23/827	2	GX23-2	800 / 685	10000	2700

▲Correlated Color Temperature (Kelvin)

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)










# FLUORESCENT & INCANDESCENT Replacement Lamps



Ruud Lighting Direct carries a wide selection of lamps from Luma Lamps. Choose from Single Tube, Double Tube-2 pin, Double Tube-4 pin, Triple Tube, Double D and Linear Fluorescent lamps and quartz halogen - all 100% satisfaction guaranteed.

	CATALOG #	DESCRIPTION	PINS	BASE	INITIAL/MEAN LUMENS	AVERAGE RATED LIFE	CCT <sup>▲</sup> (K)	CRI
CFL Double Tube (4-pin) 	<b>13W</b>							
	:CF13D4/27	CFQ13W/G24q/827	4	G24q-1	890 / 750	12000	2700	82
	:CF13D4/35	CFQ13W/G24q/835	4	G24q-1	890 / 750	12000	3500	82
	:CF13D4/41	CFQ13W/G24q/841	4	G24q-1	890 / 750	12000	4100	82
	<b>18W</b>							
	:CF18D4/27	CFQ18W/G24q/827	4	G24q-2	1190 / 960	12000	2700	82
	:CF18D4/35	CFQ18W/G24q/835	4	G24q-2	1190 / 960	12000	3500	82
	:CF18D4/41	CFQ18W/G24q/841	4	G24q-2	1190 / 960	12000	4100	82
	<b>26W</b>							
	:CF26D4/27	CFQ26W/G24q/827	4	G24q-3	1700 / 1435	12000	2700	82
	:CF26D4/35	CFQ26W/G24q/835	4	G24q-3	1700 / 1435	12000	3500	82
	:CF26D4/41	CFQ26W/G24q/841	4	G24q-3	1700 / 1435	12000	4100	82
CFL Triple Tube (4-pin) 	<b>26W</b>							
	:CF26T4/27	CFTR26W/GX24q/827	4	GX24q-3	1700 / 1435	12000	2700	82
	:CF26T4/35	CFTR26W/GX24q/835	4	GX24q-3	1700 / 1435	12000	3500	82
	:CF26T4/41	CFTR26W/GX24q/841	4	GX24q-3	1700 / 1435	12000	4100	82
	<b>32W</b>							
	:CF32T4/27	CFTR32W/GX24q/827	4	GX24q-3	2180 / 1845	12000	2700	82
	:CF32T4/35	CFTR32W/GX24q/835	4	GX24q-3	2180 / 1845	12000	3500	82
	:CF32T4/41	CFTR32W/GX24q/841	4	GX24q-3	2180 / 1845	12000	4100	82
	<b>42W</b>							
	:CF42T4/27	CFTR42W/GX24q/827	4	GX24q-4	3190 / 2680	12000	2700	82
	:CF42T4/35	CFTR42W/GX24q/835	4	GX24q-4	3190 / 2680	12000	3500	82
	:CF42T4/41	CFTR42W/GX24q/841	4	GX24q-4	3190 / 2680	12000	4100	82
<b>57W</b>								
:CF57T4/27	CFTR57W/GX24q/827	4	GX24q-5	4300 / 3700	12000	2700	82	
:CF57T4/35	CFTR57W/GX24q/835	4	GX24q-5	4300 / 3700	12000	3500	82	
:CF57T4/41	CFTR57W/GX24q/841	4	GX24q-5	4300 / 3700	12000	4100	82	
CFL Double D (4-pin) 	<b>21W</b>							
	:CF21D/35	CF21W/2D/GR10q/835	4	GR10q-4	1350 / 1130	10000	3500	82
	<b>28W</b>							
	:CF28D/35	CF28W/2D/GR10q/835	4	GR10q-4	2045 / 1715	10000	3500	82
	<b>38W</b>							
	:CF38D/35	CF38W/2D/GR10q/835	4	GR10q-4	2845 / 2390	10000	3500	82

▲Correlated Color Temperature (Kelvin)

	CATALOG #	DESCRIPTION	APPROX. LUMENS	AVERAGE RATED LIFE
Quartz DC Bayonet Base 	<b>100W</b>			
	:QZ100DC	Q100DC	1200	2000
	<b>150W</b>			
	:QZ150DC	Q150DC	2100	2000
Quartz Double Ended Base 	<b>100W</b>			
	:QZ100T3	Q100T3	1200	2000
	:QZ100T3L	Q100T3/Long	1300	2000
	<b>150W</b>			
	:QZ150T3	Q150T3	2000	2000
	<b>250W</b>			
	:QZ250T3	Q250T3	4250	2000
	<b>300W</b>			
	:QZ300T3	Q300T3	4800	2000
	<b>500W</b>			
:QZ500T4	Q500T4	8500	2000	

### QUARTZ LAMPS

Use only in an enclosed fixture. Do not touch lamp with bare hands. Keep combustible materials away from lamp. Do not use if lamp is scratched or broken. Use in fixtures rated for this product.

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



# HID Replacement Lamps



Ruud Lighting carries a wide selection of HID lamps from Luma Lamps. Choose from Probe Start Metal Halide, Pulse Start Metal Halide and High Pressure Sodium – all 100% satisfaction guaranteed.

CATALOG #	DESCRIPTION	FIXTURE TYPE	BULB TYPE	OPERATING POSITION	BASE	INITIAL/MEAN LUMENS (V)	CCT* (K)	CRI	AVERAGE RATED LIFE (V)
<b>70W (ANSI-M98)</b>									
:MH070G12	MH070/G12/UVS/4K Clear	Enclosed	T8 (T25)	Universal	G12	5600	4200	70	10000
<b>100W (ANSI-M90)</b>									
:MH100G12	MH100/G12/UVS/4K Clear	Enclosed	T8 (T25)	Universal	G12	9000	4200	70	10000
<b>150W (ANSI-M102)</b>									
:MH150G12	MH150/G12/UVS/4K Clear	Enclosed	T8 (T25)	Universal	G12	14000	4200	70	10000
<b>50W (ANSI-M110) Pulse Start</b>									
:MH050MCE	MH50/MED/U/C/E Coated	Enclosed	ED17	Universal	E26	3200 / 2100	3700	70	10000
:MH050MCO	MH50/MED/U/C/O Coated	Open	EDX17	Universal	E26	3000 / 2000	3700	70	10000
:MH050ME	MH50/MED/U/E Clear	Enclosed	ED17	Universal	E26	3400 / 2200	4000	65	10000
:MH050MO	MH50/MED/U/O Clear	Open	EDX17	Universal	E26	3200 / 2100	3200	65	10000
<b>70W (ANSI-M98) Pulse Start</b>									
:MH070MCE	MH70/MED/U/C/E Coated	Enclosed	ED17	Universal	E26	5300 / 3400	3700	70	15000
:MH070MCO	MH70/MED/U/C/O Coated	Open	EDX17	Universal	E26	5000 / 3300	3700	70	15000
:MH070ME	MH70/MED/U/E Clear	Enclosed	ED17	Universal	E26	5600 / 3600	4000	65	15000
:MH070MO	MH70/MED/U/O Clear	Open	EDX17	Universal	E26	5300 / 3400	4000	65	15000
<b>100W (ANSI-M90) Pulse Start</b>									
:MH100MCE	MH100/MED/U/C/E Coated	Enclosed	ED17	Universal	E26	8500 / 5500	3700	70	15000
:MH100MCO	MH100/MED/U/C/O Coated	Open	EDX17	Universal	E26	8100 / 5300	3700	70	15000
:MH100ME	MH100/MED/U/E Clear	Enclosed	ED17	Universal	E26	9000 / 5900	4000	65	15000
:MH100MO	MH100/MED/U/O Clear	Open	EDX17	Universal	E26	8500 / 5500	3200	65	15000
<b>150W (ANSI-M102) Pulse Start</b>									
:PS150MCE	PS150/MED/U/C/E Coated	Enclosed	ED17	Universal	E26	13300 / 10000	3700	70	15000
:PS150MCO	PS150/MED/U/C/O Coated	Open	EDX17	Universal	E26	15000 / 9500	3700	70	15000
:PS150ME	PS150/MED/U/E Clear	Enclosed	ED17	Universal	E26	14000 / 10500	4000	68	15000
:PS150MO	PS150/MED/U/O Clear	Open	EDX17	Universal	E26	13300 / 10000	4000	68	15000
<b>175W (ANSI-M57) Probe Start</b>									
:MH175MCE	MH175/MED/U/C/E Coated	Enclosed	ED17	Universal	E26	13300 / 8600	3700	70	10000
:MH175ME	MH175/MED/U/E Clear	Enclosed	ED17	Universal	E26	14000 / 9100	4000	65	10000
<b>175W (ANSI-M57) Probe Start</b>									
:MH175CE	MH175/U/C/E Coated	Enclosed	ED28	Universal	E39	13300 / 8600	3700	70	10000
:MH175E	MH175/U/E Clear	Enclosed	ED28	Universal	E39	14000 / 9100	4000	65	10000
<b>250W (ANSI-M58) Probe Start</b>									
:MH250CE	MH250/U/C/E Coated	Enclosed	ED28	Universal	E39	20000 / 13000	3700	70	10000
:MH250E	MH250/U/E Clear	Enclosed	ED28	Universal	E39	21000 / 13700	4000	65	10000
<b>400W (ANSI-M59) Probe Start</b>									
:MH400UCE	MH400/U/C/E Coated	Enclosed	ED37	Universal	E39	34000 / 22000	3700	70	20000
:MH400UE	MH400/U/E Clear	Enclosed	ED37	Universal	E39	36000 / 23000	4000	65	20000
:MH400UPCE	MH400/28/U/C/E Coated	Enclosed	ED28	Universal	E39	34000 / 22000	3700	70	20000
:MH400UPE	MH400/28/U/E Clear	Enclosed	ED28	Universal	E39	36000 / 23000	4000	65	20000
:MH400BUCE	MH400/VBU/C/O Coated	Open	ED37	Base Up	EX39	38000 / 25000	3700	70	20000
:MH400BUO	MH400/VBU/O Clear	Open	ED37	Base Up	EX39	40000 / 26000	4000	65	20000
<b>1000W (ANSI-M47) Probe Start</b>									
:MH999UCE	MH1000/U/C/E Coated	Enclosed	BT56	Universal	E39	110000 / 71000	4000	70	12000
:MH999UE	MH1000/U/E Clear	Enclosed	BT56	Universal	E39	106000 / 85500	4200	65	15000
:MH999UPE	MH1000/37/U/E Clear	Enclosed	BT37	Universal	E39	110000 / 71000	4000	65	12000

\*Correlated Color Temperature (Kelvin)










Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)



# HID Replacement Lamps



Ruud Lighting carries a wide selection of HID lamps from Luma Lamps. Choose from Probe Start Metal Halide, Pulse Start Metal Halide and High Pressure Sodium – all 100% satisfaction guaranteed.

CATALOG #	DESCRIPTION	FIXTURE TYPE	BULB TYPE	OPERATING POSITION	BASE	INITIAL/MEAN LUMENS (V)	CCT <sup>▲</sup> (K)	CRI	AVERAGE RATED LIFE (V)	
<b>250W (ANSI-M138/M153) Pulse Start</b>										
 ED28	:PS250BUCE	PS250/VBU/C/E Coated	Enclosed	ED28	Base Up	E39	23800 / 19000	3700	70	15000
	:PS250BUO	PS250/VBU/C/O Coated	Open	ED28	Base Up	EX39	22600 / 18000	3700	70	15000
	:PS250BUE	PS250/VBU/E Clear	Enclosed	ED28	Base Up	E39	25000 / 20000	4000	68	15000
	:PS250BUO	PS250/VBU/O Clear	Open	ED28	Base Up	EX39	23800 / 19000	4000	68	15000
<b>320W (ANSI-M132/M154) Pulse Start</b>										
Pulse Start Metal Halide Mogul Base	:PS320BUO	PS320/VBU/C/O Coated	Open	ED37	Base Up	EX39	29000 / 23000	3700	70	20000+
	:PS320BUE	PS320/VBU/E Clear	Open	ED37	Base Up	EX39	31000 / 25000	4000	68	20000+
	:PS320PBCE	PS320/28/VBU/C/E Coated	Enclosed	ED28	Base Up	E39	31000 / 25000	3700	70	20000+
	:PS320PBCO	PS320/28/VBU/C/O Coated	Open	ED28	Base Up	EX39	29000 / 23000	3700	70	20000+
	:PS320PBUE	PS320/28/VBU/E Clear	Enclosed	ED28	Base Up	E39	33000 / 26000	4000	68	20000+
	:PS320PBUO	PS320/28/VBU/O Clear	Open	ED28	Base Up	EX39	31000 / 25000	4000	68	20000+
<b>400W (ANSI-M135/M155) Pulse Start</b>										
 ED37	:PS400BUCE	PS400/VBU/C/E Coated	Enclosed	ED37	Base Up	E39	42000 / 33000	3700	70	20000+
	:PS400BUO	PS400/VBU/C/O Coated	Open	ED37	Base Up	EX39	39000 / 31000	3700	70	20000+
	:PS400BUE	PS400/VBU/E Clear	Enclosed	ED37	Base Up	E39	44000 / 35000	4000	68	20000+
	:PS400BUO	PS400/VBU/O Clear	Open	ED37	Base Up	EX39	41000 / 33000	4000	68	20000+
	:PS400PBCE	PS400/28/VBU/C/E Coated	Enclosed	ED28	Base Up	E39	42000 / 33000	3700	70	20000+
	:PS400PBCO	PS400/28/VBU/C/O Coated	Open	ED28	Base Up	EX39	39000 / 31000	3700	70	20000+
	:PS400PBUE	PS400/28/VBU/E Clear	Enclosed	ED28	Base Up	E39	44000 / 35000	4000	68	20000+
	:PS400PBUO	PS400/28/VBU/O Clear	Open	ED28	Base Up	EX39	41000 / 33000	4000	68	20000+
<b>35W (ANSI-S76)</b>										
High Pressure Sodium Medium Base 	:HPO35M	HPS35/MED/U Clear	Open	ED17	Universal	E26	2250 / 1700	2100	22	16000
	<b>50W (ANSI-S68)</b>									
	:HPO50M	HPS50/MED/U Clear	Open	ED17	Universal	E26	4000 / 3600	2100	22	24000+
	<b>70W (ANSI-S62)</b>									
	:HPO70M	HPS70/MED/U Clear	Open	ED17	Universal	E26	6000 / 4500	2100	22	24000+
<b>100W (ANSI-S54)</b>										
High Pressure Sodium Mogul Base 	:HP100M	HPS100/MED/U Clear	Open	ED17	Universal	E26	9000 / 6750	2100	22	24000+
	<b>150W (ANSI-S55)</b>									
	:HP150M	HPS150/MED/U Clear	Open	ED17	Universal	E26	15000 / 11250	2100	22	24000+
<b>50W (ANSI-S68)</b>										
High Pressure Sodium Mogul Base 	:HP050	HPS50/U Clear	Open	ED23.5	Universal	E39	4000 / 3600	2100	22	24000+
	<b>70W (ANSI-S62)</b>									
	:HP070	HPS70/U Clear	Open	ED23.5	Universal	E39	6000 / 4500	2100	22	24000+
	<b>100W (ANSI-S54)</b>									
High Pressure Sodium Mogul Base 	:HP100	HPS100/U Clear	Open	ED23.5	Universal	E39	9000 / 6750	2100	22	24000+
	<b>150W (ANSI-S55)</b>									
	:HP150	HPS150/U Clear	Open	ED23.5	Universal	E39	15000 / 11250	2100	22	24000+
<b>250W (ANSI-S50)</b>										
High Pressure Sodium Mogul Base 	:HP250	HPS250/U Clear	Open	ET18	Universal	E39	26000 / 19500	2100	22	24000+
	<b>400W (ANSI-S51)</b>									
	:HP400	HPS400/U Clear	Open	ET18	Universal	E39	48000 / 36000	2100	22	24000+
<b>1000W (ANSI-S52)</b>										
ET23.5  ET25 	:HP999	HPS1000/U Clear	Open	ET25	Universal	E39	130000 / 124000	2100	22	24000+

▲Correlated Color Temperature (Kelvin)

Spec sheets and photometric files are available at [www.ruudlightingdirect.com](http://www.ruudlightingdirect.com)

## LIMITED WARRANTY SUMMARY

Ruud Lighting provides a limited warranty to the original purchaser of its products. Below is a summary of some of the terms of Ruud Lighting's limited warranty. It is only a summary. Complete terms of Ruud Lighting's limited warranty for its products can be found at

[www.ruudlightingdirect.com/conditions\\_of\\_use](http://www.ruudlightingdirect.com/conditions_of_use)

Copies are also available upon request.

### ONE YEAR

Round Tapered Poles

### THREE YEARS

Security Fixtures

High and Low Bay Fixtures

Flood and Area Fixtures

Exit and Emergency products

Indirect Fixtures

Exit and Emergency batteries

Premium Square Steel Poles

### FIVE YEARS

Linear Fluorescent Fixtures

## LIMITED WARRANTY FOR FINISH

Ruud Lighting's Colorfast DeltaGuard® finish limited warranty provides that the finish will be free from material cracking, peeling, excessive fading or corrosion defects under normal use and service for seven years.

## LIMITED WARRANTY FOR ROUND TAPERED POLES

Ruud Lighting offers a one-year limited warranty for its Round Tapered Poles. RLI warrants to Buyer, with proof of purchase, that its Round Tapered Poles will be free from material defects in workmanship and materials under normal use and service for a period of one year commencing on the date of product shipment (the "Pole Warranty Period"). The Limited Round Tapered Pole Warranty specifically excludes fatigue failure or similar phenomena, resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the pole. Buyer assumes all liabilities associated with ensuring the Round Tapered Poles ordered by Buyer will be a compatible fit to the foundation or anchorage to which the Round Tapered Poles may be attached and for the structural integrity of such foundation and anchorage. Company disclaims all liability for damages which may result from the improper installation of the Round Tapered Poles.

## LIMITED WARRANTY FOR LAMPS

Ruud Lighting's supplied lamps limited warranty provides that the lamps will be free from material defects in workmanship and materials under normal use and service for the following periods from date of shipment:

### THREE MONTHS

- Incandescent lamps, including quartz
- Compact fluorescent lamps used in products that are connected to control gear or occupancy sensor that cause lamps to frequently switch "on" or "off"
- Special order compact fluorescent lamps, regardless of manufacturer's published lamp life data

### SIX MONTHS

- HID lamps with rated life less than 10,000 hours, as published in the Lamps Section of Company's catalog
- Fluorescent lamps with rated life less than 10,000 hours, as published in the Lamps Section of Company's catalog
- Linear fluorescent lamps used in products that are connected to control gear or occupancy sensor that cause lamps to frequently switch "on" or "off"
- Special order HID lamps, regardless of manufacturer's published lamp life data

### ONE YEAR

- HID lamps with rated life equal to or greater than 10,000 hours, as published in the Lamps Section of Company's catalog
- Fluorescent lamps with rated life equal to or greater than 10,000 hours, as published in the Lamps Section of Company's catalog

### THIS DOCUMENT IS A SUMMARY ONLY IT IS NOT LEGALLY BINDING

All purchases of products and services from Ruud Lighting, Inc. are subject to the Ruud Lighting, Inc. Terms and Conditions of Sale as in effect from time to time which are hereby incorporated by reference. From time to time, the Ruud Lighting, Inc. Terms and Conditions of Sale may be modified by Ruud Lighting, Inc. in its sole discretion and without notice. For complete warranty terms for products sold by Ruud Lighting, please refer to the limited warranty information located at:

[www.ruudlightingdirect.com/conditions\\_of\\_use](http://www.ruudlightingdirect.com/conditions_of_use)

or by sending a written request to Ruud Lighting, Inc., Customer Service Department, 9201 Washington Ave., Racine, WI 53406 or by calling Customer Service at 800-236-7000.