

# FROM BELGIUM WITH LOVE



WEVER & DUCRE  
LIGHTING

LIFE IS  
TOO SHORT  
FOR BORING  
LIGHTING



WEVER & DUCRÉ  
LIGHTING



# INDEX

**INTERIOR**  
p. 19

**EXTERIOR**  
p. 347

**TECHNICAL**  
p. 463

FRESH.

# FROM BELGIUM WITH LOVE

Delicious waffles and chocolate prepared with love – that's what Belgium is famous for, right? Not exactly. For a while now, Belgium also stands for trendy lights that not only look great, but also have compelling inner values. State-of-the-art LEDs that feel equally at home in a cosy attic apartment or in the hippest club in the city. Because they save space, preserve resources, and offer a greater quality of life. And that is exactly what we at Wever & Ducré want. Where do we get our inspiration? From people like you who share our passion for beautiful things and who attach just as much importance to appealing design as to high-quality construction. Sounds good? Then keep reading. The newest highlights are waiting for you.

Köstliche und mit viel Liebe zubereitete Waffeln und Schokolade – dafür ist Belgien berühmt. Stimmt's? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten, die nicht nur toll aussehen, sondern auch mit inneren Werten punkten. LEDs der jüngsten Generation, die sich in einer kleinen Dachgeschosswohnung ebenso wohlfühlen, wie im angesagtesten Club der Stadt. Denn sie sparen Platz, schonen die Ressourcen und sorgen so ganz einfach für mehr Lebensqualität. Und genau das ist es auch, was wir von Wever & Ducré möchten. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebensoviel Wert legen wie auf eine hochwertige Verarbeitung. Klingt interessant? Dann blättern Sie doch einfach weiter. Die neuesten Hotspots warten schon auf Sie.





**KNARF**  
*Wall and Piece*

“Copper, chrome, gold – my wall really has to be striking. Ideally in a significant colour combination.”

**AN EYE-CATCHER**

No wonder. Because KNARF masters the interplay of light and shadow, colours and structure like no other. That's why we wanted Vienna's street artist to design our cover. And voilà – his latest masterpiece sprayed in Miami is proudly featured on our title page. And we are as proud as we can be. Just as proud as we are of the numerous other artists and designers who make the Wever & Ducré brand something very special. Year after year.

Kein Wunder. Denn das Spiel mit Licht und Schatten, Farben und Strukturen beherrscht KNARF wie kein anderer. Deshalb wollten wir den Wiener Streetart-Künstler auch unbedingt für die Gestaltung unseres Covers haben. Et voilà – jetzt leuchtet sein neues Meisterwerk, gesprayed in Miami, direkt vom druckfrischen Titelblatt. Und wir sind natürlich wahnsinnig stolz. Genau wie auf die vielen anderen Künstler und Designer, die die Marke Wever & Ducré zu etwas ganz Besonderem machen. Und das jedes Jahr aufs Neue.



YOU'RE DAZZLING ME.

# LEDS SHINE SO BRIGHT

## HOT SPOTS WERE YESTERDAY

The good old light bulb has heated more than it has illuminated since Edison's times. But that's history now. Today's modern lamps are considerably more efficient and are also much easier on our wallets. An LED puts out up to 20 times more light than an incandescent bulb, and can be directed much more effectively because of its positioned light emission. Not to mention their durability. Because once you buy one, it will last for almost a lifetime. Which is why we at Wever & Ducré primarily use LEDs. So you can really see the light.

## HOTSPOTS WAREN GESTERN


Seit Edisons Zeiten hat die gute alte Glühbirne mehr geheizt als geleuchtet. Das ist jetzt Geschichte. Heute erhellen moderne Leuchtmittel wesentlich effizienter und schonen zudem noch unseren Geldbeutel. Denn eine LED hat die bis zu 20-fache Lichtausbeute der Glühbirne und ist dank gerichteter Lichtabstrahlung deutlich besser lenkbar. Von ihrer Haltbarkeit ganz zu schweigen. Einmal gekauft, hält sie nämlich fast ein Leben lang. Deshalb setzen wir bei Wever & Ducré vorrangig auf LED. Damit Ihnen wirklich ein Licht aufgeht.

## HAVE YOU HEARD?

Once you start listing the many advantages of LEDs, it's hard to take a breath: energy efficient, durable, no maintenance, environmentally friendly, infinitely dimmable, compact, and much more. Do you think we are trying to sway your opinion? We're not. LEDs simply have a lot going for them - they are the future. Take a look for yourself.

## SCHON GEHÖRT?

Zählt man die vielen Vorteile von LEDs auf, fällt Luftholen schwer: energieeffizient, langlebig, wartungsfrei, umweltfreundlich, stufenlos dimmbar, kompakt und und und ... Sie glauben, wir versuchen Sie zu beeinflussen? Nicht doch. LEDs haben einfach unglaublich viele Vorteile - sie sind die Zukunft. Überzeugen Sie sich selbst.

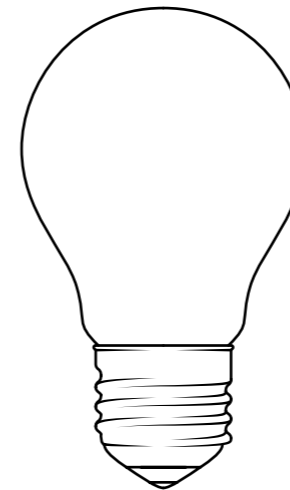


### THE CLASSIC

*Incandescent Lamp  
75 W*

#### GOOD TO KNOW

12 lm/W light output  
2700 K colour temperature  
1,000 hours operating life

*12 lm/W Lichtausbeute  
2700 K Farbtemperatur  
1.000 Betriebsstunden*




### THE 80'S

*Halogen  
50 W*

#### GOOD TO KNOW

10-19 lm/W light output  
2700-2800 K colour temperature  
2,000 to 4,000 hours operating life

*10-19 lm/W Lichtausbeute  
2700-2800 K Farbtemperatur  
2.000 bis 4.000 Betriebsstunden*



### THE PERFORMER

*LED  
8 W*

#### GOOD TO KNOW

Up to 180 lm/W light output  
1800-6000 K colour temperature  
50,000 hours operating life

*Bis 180 lm/W Lichtausbeute  
1800-6000 K Farbtemperatur  
50.000 Betriebsstunden*

LIKE A SNUGGIE, BUT WITH LIGHTS.

# WHAT A FEELING

## TRULY INSPIRING

Light has a tremendous effect on our subconsciousness. Sounds far-fetched? It's not. Because the colour of light influences our sleeping and waking cycle, meaning our circadian rhythm. Cooler light temperatures (from 3000 K) help us to wake up, and warmer temperatures (from 2700 K) help us to relax. Neutral light colours (around 3500 K) are the ideal companions through the day and are perfect for the office or workplace.

## DIE MACHT SIE RICHTIG AN

Licht hat eine große Wirkung auf unser Unterbewusstsein. Klingt nach Hokusfokus? Von wegen. Denn die Farbe des Lichts unterstützt unseren Wach- und Schlafzyklus. So helfen uns kühlere Lichtfarben (ab 3000 K) beim Wachwerden und wärmere (ab 2700 K) in den Relaxmodus zu schalten. Neutralere Lichtfarben (um die 3500 K) begleiten uns perfekt durch den Tag und eignen sich deshalb perfekt fürs Büro oder den Arbeitsplatz.

## HAVE YOU HEARD?

How about a bit of physics? Just for you. The effect that colours have depends on their so-called CRI value (colour rendering index), which can be between 0 and 100. It indicates how natural colours appear to be when they are exposed to artificial light. The higher the CRI, the more intensely the colour is perceived. LED lamps with a CRI level above 80 cause colours to appear the same as if they were exposed to a natural light source.

## SCHON GEHÖRT?

Lust auf ein bisschen Physikunterricht? Bitte sehr. Wie Farben wirken, hängt vom sogenannten CRI-Wert (Colour Rendering Index) ab. Das ist nichts anderes als der Farbwiedergabewert, der zwischen 0 und 100 liegen kann. Er bestimmt die Natürlichkeit von Farben, die künstlichem Licht ausgesetzt sind. Je größer der CRI, desto kräftiger wird die Farbe empfunden. LED-Leuchten mit einem CRI größer 80 lassen Farben so wirken, als würden sie von einer natürlichen Lichtquelle angestrahlt.

# 2200 K for romantic moments

Create a sunset feeling right in your living room. With LEDs that shine like candlelight. But without candles. Sounds strange, but it actually works. At the push of a button.

Holen Sie sich Sonnenuntergangsstimmung doch einfach ins Wohnzimmer. Mit LEDs, die wie Kerzenlicht wirken. Nur eben ohne Kerzen. Klingt komisch, funktioniert aber tatsächlich. Und das sogar auf Knopfdruck.





## 2700 K for traditional home lighting

### THE TRADITIONAL SOLUTION

What makes a living room truly cosy? A comfortable couch, sure. But the right lighting is even more important. In living spaces, the ideal colour temperature is around 2700 K. LEDs with this value provide an especially pleasing light and bring out the best in a kitchen or bathroom, here as well - with the push of a button.

### DIE KLASSISCHE LÖSUNG

Was macht ein Wohnzimmer erst so richtig gemütlich? Klar, eine tolle Couch. Noch viel wichtiger ist aber das richtige Licht, dessen ideale Farbtemperatur in Wohnräumen um die 2700 K liegt. LEDs mit diesem Wert sorgen für ein besonders angenehmes Wohnraumlicht und rücken auch Küche oder Bad mit einem Klick ins richtige Licht.



## 3000 K for new clarity

### VERY COOL

Do you like things more clean cut? No problem! You can also create a pleasant atmosphere with cooler light. LEDs with a colour temperature around 3000 K are perfect for minimalist rooms or neutrally designed areas.

### GANZ NÜCHTERN BETRACHTET

Sie sind eher der sachliche Typ? Kein Problem. Gemütlich kann man sich schließlich auch mit etwas kühlerem Wohnraumlicht machen. LEDs mit einer Farbtemperatur um die 3000 K eignen sich perfekt in minimalistischen Räumen oder einer neutral gestalteten Umgebung.



FROM DUSK TILL DAWN.



# RIGHT ATMOSPHERE AND MOOD

## TURN IT HOWEVER YOU WANT

You can now set the right light for any mood with a simple twist. Do you want a chipper morning at 3000 K, or a romantic evening with a candlelight atmosphere at 1800 K? Either way, we have it covered! And the best thing is, the Ambient White Dim is available for nearly all of our lights. So you don't have to compromise on design. All you need is a three-wire cable, a phase cut dimmer and one of our lights. Keep shining!

## DREHN SIE'S WIE SIE'S MÖCHTEN

Ab sofort können Sie im Handumdrehen genau die Lichtstimmung zaubern, die Ihnen gefällt. Ein munterer Morgen bei 3000 K oder lieber ein romantischer Abend mit Candlelight-Stimmung bei 1800 K? Kein Problem. Und das Beste: Das Ambient White Dim ist für fast alle unsere Leuchten erhältlich. Damit sind Ihnen in puncto Design keine Grenzen gesetzt. Alles was Sie brauchen ist ein 3-poliges Kabel, einen Phasenabschnittsdimmer und eine unserer Leuchten. Also keep shining!


GET YOURSELF

# IN THE MOOD FOR

*2700 K for  
Lunch*

*1800 K for  
Dinner*

*3000 K for  
Breakfast*

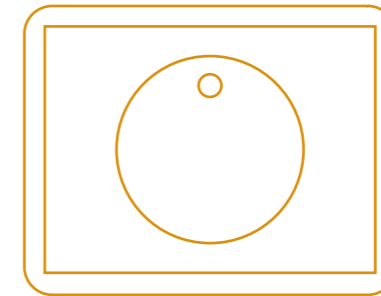

3000 K to 1800 K in  
less than a second

**YVES MARGINET**  
*Sales Area Manager*

“When I see something beautiful, I simply have to have it.”

**... SO WHAT NOW?**

Have you fallen madly in love with one of our lights and want nothing more than to spend the rest of your life with it? We understand you all too well. Which is why we do everything we can to ensure that your delivery arrives as quickly as possible. Want an example? When we receive an order by 14:30 and the light is in stock, we send it out the very next day. So that you can spend your first evening together.

**... UND AB DIE POST.**

Sie haben sich Hals über Kopf in eine unserer Leuchten verliebt und möchten jetzt nur noch eines: den Rest Ihres Lebens mit ihr verbringen? Verstehen wir gut. Deshalb tun wir alles, damit Ihr neuer Liebling so schnell wie möglich zu Ihnen kommt. Kleines Beispiel gefällig? Erreicht uns eine Bestellung bis 14:30 Uhr, versenden wir sie – wenn die Leuchte lagernd ist – gleich am nächsten Tag. So steht dem ersten gemeinsamen Abend nichts mehr im Wege.



**INTERIOR**

# INTERIOR



<b>CEILING RECESSED</b> p. 23 – 97	 <b>DEEP</b> p. 23	 <b>RONY</b> p. 41	 <b>RON</b> p. 43	 <b>PYRAMID</b> p. 49	 <b>LUNA</b> p. 53	 <b>LITO</b> p. 57	 <b>HIDE</b> p. 59	 <b>CORY</b> p. 63
	 <b>CORO</b> p. 67	 <b>PLANO</b> p. 71	 <b>STRANGE</b> p. 75	 <b>COCOZ</b> p. 79	 <b>OBOQ</b> p. 83	 <b>SLALOM</b> p. 87	 <b>SPINO</b> p. 89	 <b>SPYDER</b> p. 91
<b>CEILING SURFACE</b> p. 99 – 175	 <b>NOP</b> p. 97	 <b>PLUXO</b> p. 99	 <b>SOLID</b> p. 109	 <b>SIRRA</b> p. 113	 <b>SIRRO</b> p. 115	 <b>ROBY</b> p. 119	 <b>CORY</b> p. 121	 <b>CORO</b> p. 125
	 <b>MUST</b> p. 129	 <b>BOX</b> p. 131	 <b>DOCUS</b> p. 137	 <b>HEXO</b> p. 141	 <b>RAY</b> p. 147	 <b>BEBOW</b> p. 151	 <b>VENN</b> p. 155	 <b>J.J.W.</b> p. 157
<b>CEILING SUSPENDED</b> p. 177 – 259	 <b>ROB</b> p. 161	 <b>SQUBE</b> p. 163	 <b>GO-ON</b> p. 169	 <b>PLUXO</b> p. 171	 <b>ELLO</b> p. 175	 <b>CONE</b> p. 177	 <b>SIRRA</b> p. 179	 <b>LYNER</b> p. 181
	 <b>CONCRETE</b> p. 183	 <b>BOX</b> p. 185	 <b>HEXO</b> p. 189	 <b>DOCUS</b> p. 193	 <b>RAY</b> p. 197	 <b>SIRRO</b> p. 201	 <b>PLUXO</b> p. 205	 <b>ROBY</b> p. 207

 <b>NOA</b> p. 215	 <b>J.J.W.</b> p. 217	 <b>CORY</b> p. 221	 <b>BEBOW</b> p. 223	 <b>VENN</b> p. 227	 <b>BISHOP</b> p. 229	 <b>ROCK</b> p. 233	 <b>WIRO</b> p. 237	 <b>ELLO</b> p. 247
 <b>LOUIS</b> p. 249	 <b>MACBETH</b> p. 251	 <b>GIGANT</b> p. 253	 <b>CYCLONE</b> p. 259	<b>WALL RECESSED</b> p. 261 – 279	 <b>SMILE IN</b> p. 261	 <b>LITO</b> p. 263	 <b>EYE</b> p. 265	 <b>THEMIS</b> p. 267
 <b>STRANGE</b> p. 271	 <b>STRIPE</b> p. 275	 <b>ORIS</b> p. 279	<b>WALL SURFACE</b> p. 281 – 337		 <b>SMILE ON</b> p. 281	 <b>SMILE</b> p. 283	 <b>LIGHTDROP</b> p. 285	 <b>MOON</b> p. 287
 <b>STATION</b> p. 291	 <b>METRO</b> p. 293	 <b>BENTO</b> p. 295		 <b>LEENS</b> p. 297	 <b>BENTA</b> p. 299	 <b>INCH</b> p. 301	 <b>ARZY</b> p. 303	 <b>WAHAA</b> p. 305
 <b>TRAIN</b> p. 311	 <b>BOX MINI</b> p. 313	 <b>BOX</b> p. 315	 <b>RAY MINI</b> p. 317	 <b>RAY</b> p. 319	 <b>DOCUS MINI</b> p. 321	 <b>HEXO MINI</b> p. 323	 <b>MILES</b> p. 325	 <b>YARD</b> p. 329
 <b>ROCK</b> p. 331	 <b>J.J.W.</b> p. 333	<b>FLOOR SURFACE</b> p. 339 – 345	 <b>ROCK</b> p. 339	 <b>ROCK</b> p. 343	 <b>ROCK</b> p. 345			



# DEEP

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.31kg IP20 3-0.3-D P 36°

76 90 4-30

CODE
112161W_
112161S_
112161B_

blade springs

CODE
112161W_C

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.25kg IP20 3-0.9-D

76 84 4-30

CODE
112110W0
112110S0
112110B0

blade springs

CODE
112110W0C

## ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.29kg IP20 3-0.9-D

76 105 4-30

CODE
112120W0
112120S0
112120B0

blade springs

CODE
112120W0C

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# DEEPER

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.33kg IP20 0.3-1.0 36°  
76 100 4-30

	CODE
	152161W
	152161S
	152161B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



## 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.27kg IP20 0.9-1.0  
76 100 4-30

	CODE
	152110W0
	152110S0
	152110B0

## ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903



## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.31kg IP20 0.9-1.0  
76 115 4-30

	CODE
	152120W0
	152120S0
	152120B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



Allianz Benelux

Carly J. Jans

FOYER

ivate estate LIFE

DELTA LLOYD life

AG Insurance

DHS

Generali Belgium

TOURING

BALDWIN



# DEEP ADJUST

## CEILING RECESSED



### 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.23kg IP20 0,3-1 38°

87 35°/35° 355° 90 4-30

	CODE
	112361W
	112361S
	112361G
	112361B

blade springs

	CODE
	112361W_C

#### Light Colour Selection


	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

### ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



### 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.17kg IP20 0,9-1

87 35°/35° 355° 90 4-30

	CODE
	112310W0
	112310S0
	112310G0
	112310B0

blade springs

	CODE
	112310W0C

### ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903



### 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.21kg IP20 0,9-1

87 35°/35° 355° 105 4-30

	CODE
	112320W0
	112320S0
	112320G0
	112320B0

blade springs

	CODE
	112320W0C

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471







# DEEP ASYM

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.25kg IP20 35° 100 4-30

87 35°/35° 355° 100 4-30

Color	CODE
White	112461W
Grey	112461S
Gold	112461G
Black	112461B

### Light Colour Selection

LUMEN	CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



## 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.19kg IP20 35° 90 4-30

87 35°/35° 355° 90 4-30

Color	CODE
White	112410W0
Grey	112410S0
Gold	112410G0
Black	112410B0

## ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903



## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.23kg IP20 35° 115 4-30

87 35°/35° 355° 115 4-30

Color	CODE
White	112420W0
Grey	112420S0
Gold	112420G0
Black	112420B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# DEEP IP44

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.32kg | IP44 | 0.3° | 36°

87 | 90 | 4-30

	CODE
	112661W
	112661S
	112661B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

### ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



## 1.0 MR16

QR-CBC51 max. 35W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.26kg | IP44 | 0.9°


87 | 90 | 4-30

	CODE
	112610W0
	112610S0
	112610B0

### ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903



## 1.0 PAR16

PAR16 max. 50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.30kg | IP44 | 0.9°

87 | 105 | 4-30



	CODE
	112620W0
	112620S0
	112620B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# DEEP 2.0

CEILING RECESSED

## 2.0 LED

2xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.61kg IP20 0.3° 36°

87x176 35°/35° 355° 90 4-30

	CODE
	112761W
	112761S
	112761B

## Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x420-590	>90	3
3000K	2x470-640	>90	5
1800-2850K	2x320-440	>90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.42kg IP20 0.9°

87x176 35°/35° 355° 105 4-30

	CODE
	112720W0
	112720S0
	112720B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim




	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# DEEP ADJUST

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

0.65kg IP20 0.3-1.0 38°

177 35°/35° 355° 100 4-30

	CODE
	112568W
	112568B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

## 1.0 ES111

ES111 max.75W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.41kg IP20 0.9-1.0

177 35°/35° 355° 145 4-30

	CODE
	112520W0
	112520B0

### OPTIONAL

ES111 LED GU10 13W  
phase-cut dim

	CODE
2700K   530lm	901528S2
3000K   540lm	901528S4

more lamps and specs on page 471

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium powder coated

0.41kg IP20 0.9-1.0

177 35°/35° 355° 100 4-30

	CODE
	112530W0
	112530B0

### ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903



**1.0 LED**

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP20 3-0.3-D P A 36°

102 35°/35° 355° 90° 4-40

	CODE
	110161W_
	110161S_
	110161B_

blade springs

	CODE
	110161W_C

**Light Colour Selection**

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

**ALWAYS USE**

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



**1.0 MR16**

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.28kg IP20 3-0.9-D

102 35°/35° 355° 75° 4-40

	CODE
	110110W0
	110110S0
	110110B0

blade springs

	CODE
	110110W0C

**ALWAYS USE**

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

**1.0 PAR16**

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.32kg IP20 3-0.9-D

102 35°/35° 355° 100° 4-40

	CODE
	110120W0
	110120S0
	110120B0

blade springs

	CODE
	110120W0C

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim




	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# RON

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.36kg IP20 35°/35° 355° 90° 4-40

102 35°/35° 355° 90° 4-40

CODE
111161W_
111161S_
111161B_

blade springs

CODE
111161W_C

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	320-440   >90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated

0.30kg IP20 35°/35° 355° 75° 4-40

102 35°/35° 355° 75° 4-40

CODE
111110W0
111110S0
111110B0

blade springs

CODE
111110W0C

## ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.34kg IP20 35°/35° 355° 100° 4-40

102 35°/35° 355° 100° 4-40

CODE
111120W0
111120S0
111120B0

blade springs

CODE
111120W0C

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# RON

## CEILING RECESSED



### 2.0 LED

2xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.73kg IP20 0.3-1 36°

102x210 35°/35° 355° 90° 4-40

### 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.69kg IP20 0.9-1

102x210 35°/35° 355° 100° 4-40

	CODE
	111261W_
	111261B_

	CODE
	111220W0
	111220B0

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x420-590	>90	3
3000K	2x470-640	>90	5
1800-2850K	2x320-440	>90	9

### ALWAYS USE

	CODE
power supply	
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471





RON  
CEILING RECESSED



**3.0 LED**

3xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

1.08kg IP20 0.3-D 36°

102x320 35°/35° 355° 90° 4-40

**3.0 PAR16**

3xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

1.02kg IP20 0.9-D

102x320 35°/35° 355° 100° 4-40

	CODE
	111361W_
	111361B_

	CODE
	111320W0
	111320B0

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	3x420-590	>90	3
3000K	3x470-640	>90	5
1800-2850K	3x320-440	>90	9

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

**ALWAYS USE**




	CODE
power supply	
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468



# PYRAMID

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.28kg IP20 36°

102x102 35°/35° 355° 90 4-30

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.26kg IP20 36°

102x102 35°/35° 355° 115 4-30

## 2.0 LED

2xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.50kg IP20 36°

102x172 35°/35° 355° 90 4-30

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.46kg IP20 36°

102x172 35°/35° 355° 115 4-30

CODE
113161W

CODE
113120W0

CODE
113261W

CODE
113220W0

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	420-590	>90	3
3000K	470-640	>90	5
1800-2850K	320-440	>90	9

### ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x420-590	>90	3
3000K	2x470-640	>90	5
1800-2850K	2x320-440	>90	9

### ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# PYRAMID

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

0.75kg IP20 0.3-1.0 38°


196x196 35°/35° 355° 100 4-30

CODE

113368W

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4



## 1.0 ES111

ES111 max.75W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.51kg IP20 0.9-1.0

196x196 35°/35° 355° 145 4-30

CODE

113320W0


### OPTIONAL

ES111 LED GU10 13W  
phase-cut dim

CODE

2700K   530lm	901528S2
3000K   540lm	901528S4

more lamps and specs on page 471



## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium powder coated

0.51kg IP20 0.9-1.0

196x196 35°/35° 355° 100 4-30

CODE

113330W0

### ALWAYS USE

transformer


CODE

12V   60W	90221902
12V   105W	90221903



# LUNA ROUND IP44

CEILING RECESSED



## 1.0 LED HV

LED 7W | 220-240VAC  
PCB 3-step | incl. power supply  
aluminium | stainless steel  
opal glass | polyamide

0.18kg IP44 0.3-1 6


80 50 2-25

3000K | >90 CRI | 350lm

CODE
114388W5
114388M5
114388B5

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



## 1.0 LED

LED 6/8W | 500-700mA | 9Vf  
COB 3-step | excl. power supply  
aluminium | stainless steel  
opal glass | polyamide

0.19kg IP44 0.3-1 6

80 100 2-25

CODE
114381W_
114381M_
114381B_

## Light Colour Selection

	LUMEN	CRI	CODE
2700K	360-500	>90	3
3000K	400-540	>90	5
1800-2850K	280-380	>90	9


## ALWAYS USE

	CODE
power supply	
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



## 1.0 PAR16

PAR16 max.10W | GU10  
220-240VAC | 50-60Hz  
aluminium | stainless steel  
opal glass | polyamide

0.24kg IP44 0.9-1 6

80 120 2-25

CODE
114120W0
114120M0
114120B0

## ALWAYS USE

	CODE
transformer	
12V   60W	90221902
12V   105W	90221903


## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



# LUNA SQUARE IP44

CEILING RECESSED



## 1.0 LED HV

LED 7W | 220-240VAC  
PCB 3-step | incl. power supply  
aluminium | stainless steel  
opal glass | polyamide

0.19kg IP44 3-0,3-D 6


76x76 50 2-25

3000K | >90 CRI | 350lm

	CODE
	114488W5
	114488M5
	114488B5

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102



## 1.0 LED

LED 6/8W | 500-700mA | 9Vf  
COB 3-step | excl. power supply  
aluminium | stainless steel  
opal glass | polyamide

0.20kg IP44 3-0,3-D 6

76x76 100 2-25

## Light Colour Selection

	LUMEN   CRI	CODE
2700K	360-500   >90	3
3000K	400-540   >90	5
1800-2850K	280-380   >90	9


## ALWAYS USE

	CODE
power supply	
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102



## 1.0 PAR16

PAR16 max.10W | GU10  
220-240VAC | 50-60Hz  
aluminium | stainless steel  
opal glass | polyamide

0.26kg IP44 3-0,9-D 6

76x76 120 2-25

	CODE
	114220W0
	114220M0
	114220B0

## ALWAYS USE



	CODE
transformer	
12V   60W	90221902
12V   105W	90221903

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017102



LITO  
CEILING RECESSED



1.0

LED 2/3W | 350-500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >85 CRI | 188-260lm

	CODE
	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468

2.0

LED 2/3W | 350-500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3-16

70x70 35 12-18

3000K | >85 CRI | 188-260lm



	CODE
	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468



### 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.45kg IP20  $\beta$ -0.3  $\alpha$  36°

45/45°  $\downarrow$  10°  $\beta$  145°  $\alpha$  4-25

	CODE
	117161W
	117161S
	117161B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	420-590   >90	3
3000K	470-640   >90	5
1800-2850K	370-510   >90	9

### ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.41kg IP20  $\beta$ -0.9

45/45°  $\downarrow$  13°  $\beta$  145°  $\alpha$  4-25

	CODE
	117120W0
	117120S0
	117120B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

# HIDE

## CEILING RECESSED

### ALWAYS USE

recessed housing + plaster kit

one lamp | 111x111x117mm

$\beta$  115x115  $\beta$  145°  $\alpha$  4-25

	CODE
	90012009
	90012017

two lamps | 208x111x117mm

$\beta$  212x115  $\beta$  145°  $\alpha$  4-25

	CODE
	90012010
	90012018

three lamps | 302x111x117mm

$\beta$  306x115  $\beta$  145°  $\alpha$  4-25

	CODE
	90012011
	90012019

four lamps | 398x111x117mm


$\beta$  402x115  $\beta$  145°  $\alpha$  4-25

	CODE
	90012012
	90012020

more information on page 479



HIDE  
CEILING RECESSED



**1.0 LED111**

LED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


0.93kg IP20 0.3-1 38°

45°/45° 45°/45° 215 4-25

	CODE
	117268W
	117268S
	117268B

**Light Colour Selection**

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4



**1.0 QR111**

QR111 max.75W | G53  
12V | excl. transformer  
aluminium powder coated

0.73kg IP20 0.9-1

45°/45° 45°/45° 215 4-25

	CODE
	117230W0
	117230S0
	117230B0

**ALWAYS USE**

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

**ALWAYS USE**

recessed housing + plaster kit

one lamp | 171x171x179mm

175x175 190 4-25

	CODE
	90012013
	90012021

two lamps | 327x171x179mm

331x175 190 4-25

	CODE
	90012014
	90012022

three lamps | 482x171x179mm

485x175 190 4-25

	CODE
	90012015
	90012023





four lamps | 638x171x179mm

640x175 190 4-25

	CODE
	90012016
	90012024

more information on page 479





**0.9**

LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.27kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 390lm

CODE  
126173W4

3000K | >85 CRI | 380lm | IP44

CODE  
147173W4

**1.3**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.47kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 930lm

CODE  
126274W4

**1.6**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.52kg | IP20 | 3-0.3-1

68 | 70 | 4-40

3000K | >85 CRI | 1550lm

CODE  
126374W4

3000K | >85 CRI | 1500lm | IP44 | no dim

CODE  
147373W4

**1.9**

LED 14W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.63kg | IP20 | 3-0.3-1


68 | 70 | 4-40

3000K | >85 CRI | 1820lm

CODE  
126474W4



CORY  
CEILING RECESSED



**2.1**


LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.74kg IP20 3-0,3-D

68 70 4-40

3000K | >85 CRI | 1550lm

CODE  
126574W4



**2.6**


LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.99kg IP20 3-0,3-D

86 70 4-40

3000K | >85 CRI | 2130lm

CODE  
126674W4



**3.4**

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

1.46kg IP20 3-0,3-D


86 70 4-40

3000K | >85 CRI | 2810lm

CODE  
126774W4



CORO  
CEILING RECESSED



**0.8**

LED 3W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.26kg IP20 0.3m


68 70 4-40

3000K | >85 CRI | 390lm

CODE  
127273W4

3000K | >85 CRI | 380lm | IP44

CODE  
148273W4



**1.1**


LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.37kg IP20 0.3m

68 70 4-40

3000K | >85 CRI | 930lm

CODE  
127374W4



**1.3**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.43kg IP20 0.3m


68 70 4-40

3000K | >85 CRI | 1550lm

CODE  
127474W4

3000K | >85 CRI | 1500lm | IP44 | no dim

CODE  
148473W4



**1.4**

LED 14W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.48kg IP20 0.3m

68 70 4-40

3000K | >85 CRI | 930lm


CODE  
127574W4



VISUALISATION

# CORO

CEILING RECESSED




## 1.6

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.63kg IP20  $\pm 0,3^\circ$

68 70 4-40

3000K | >85 CRI | 1550lm




## 2.0

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.79kg IP20  $\pm 0,3^\circ$

86 70 4-40

3000K | >85 CRI | 2130lm



## 2.5

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

1.21kg IP20  $\pm 0,3^\circ$

86 70 4-40

3000K | >85 CRI | 2810lm

CODE  
127674W4





CODE  
127774W4

CODE  
127874W4



# PLANO

## CEILING RECESSED



### 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.26kg IP20 0,3-D

74x78 35°/35° 355° 95 2-18

CODE

118161W\_  
118161S\_

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	420-590	>90	3
3000K	470-640	>90	5
1800-2850K	320-440	>90	9

### ALWAYS USE

power supply

CODE

350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### OPTIONAL

CODE

plasterkit 90017104

### 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.24kg IP20 0,9-D

74x78 35°/35° 355° 120 2-18

CODE

118120W0  
118120S0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

CODE

plasterkit 90017104

### 2.0 LED

2xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.48kg IP20 0,3-D

74x148 35°/35° 355° 95 2-18

CODE

118261W\_  
118261S\_

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x420-590	>90	3
3000K	2x470-640	>90	5
1800-2850K	2x320-440	>90	9

### ALWAYS USE

power supply

CODE

350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

### OPTIONAL

CODE

plasterkit 90017105

### 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.44kg IP20 0,9-D

74x148 35°/35° 355° 120 2-18

CODE

118220W0  
118220S0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

CODE

2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL




CODE

plasterkit 90017105



# PLANO

## CEILING RECESSED



### 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

0.65kg IP20 0.3° 38°

141x145 35°/35° 355° 90° 2-18

	CODE
	118368W
	118368S

#### Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

#### OPTIONAL

	CODE
plasterkit	90017106

### 1.0 ES111

ES111 max.75W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.41kg IP20 0.9°

141x145 35°/35° 355° 145° 2-18

	CODE
	118320W0
	118320S0

#### OPTIONAL

ES111 LED GU10 13W  
phase-cut dim

	CODE
2700K   530lm	901528S2
3000K   540lm	901528S4

more lamps and specs on page 471

	CODE
plasterkit	90017106

### 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium powder coated

0.41kg IP20 0.9°

141x145 35°/35° 355° 90° 2-18

	CODE
	118330W0
	118330S0

#### ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903






#### OPTIONAL

	CODE
plasterkit	90017106



# STRANGE

CEILING RECESSED

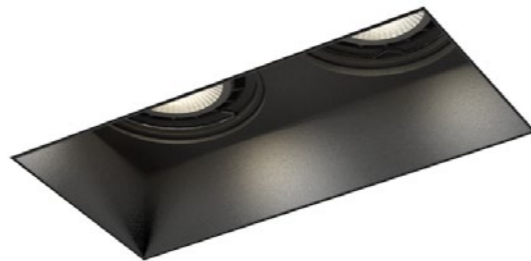

## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.43kg IP20 0.3-1

86x86 35°/35° 355° 95 4-25

	CODE
	131161W_
	131161B_

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	420-590	>90	3
3000K	470-640	>90	5
1800-2850K	320-440	>90	9

## ALWAYS USE

plasterkit 90017116

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.41kg IP20 0.9-1

86x86 35°/35° 355° 120 4-25

	CODE
	13120W0
	13120B0

## ALWAYS USE

plasterkit 90017116

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## 2.0 LED

2xLED 7/10W | 350-500mA | 18Vf  
COB 3-step | excl. power supply  
aluminium powder coated

0.74kg IP20 0.3-1

86x156 35°/35° 355° 95 4-25

	CODE
	131261W_
	131261B_

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x420-590	>90	3
3000K	2x470-640	>90	5
1800-2850K	2x320-440	>90	9

## ALWAYS USE

plasterkit 90017117

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.70kg IP20 0.9-1

86x156 35°/35° 355° 120 4-25

	CODE
	131220W0
	131220B0

## ALWAYS USE

plasterkit 90017117

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim




	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# STRANGE

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

1.03kg IP20  $\theta$ -0,3- $\theta$   $\Delta$  38°

154x154  $\angle$  35°/35°  $\downarrow$  355°  $\text{N}$  90  $\text{N}$  4-25

	CODE
	131368W_
	131368B_

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

### ALWAYS USE

	CODE
plasterkit	90017118

## 1.0 ES111

ES111 max.75W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.75kg IP20  $\theta$ -0,9- $\theta$

154x154  $\angle$  35°/35°  $\downarrow$  355°  $\text{N}$  135  $\text{N}$  4-25

	CODE
	131320W0
	131320B0

### ALWAYS USE

	CODE
plasterkit	90017118

### OPTIONAL

ES111 LED GU10 13W  
phase-cut dim

	CODE
2700K   530lm	901528S2
3000K   530lm	901528S4

more lamps and specs on page 471

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium powder coated

0.75kg IP20  $\theta$ -0,9- $\theta$

154x154  $\angle$  35°/35°  $\downarrow$  355°  $\text{N}$  90  $\text{N}$  4-25

	CODE
	131330W0
	131330B0

### ALWAYS USE

	CODE
plasterkit	90017118

transformer



	CODE
12V   60W	90221902
12V   105W	90221903





# COCOZ ROUND

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

1.06kg IP20 0.3° P A 38°

152 25°/25° 365° 170 2-25

	CODE
	119168J_
	119168U_

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium | steel powder coated

0.78kg IP20 0.9°

152 25°/25° 365° 170 2-25

	CODE
	119130J0
	119130U0

### ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903







VISUALISATION

# COCOZ SQUARE

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

1.15kg IP20 0.3-0.4

145x145 25°/25° 365° 180 2-25

	CODE
	119268J
	119268U

## Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4



## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium | steel powder coated

0.87kg IP20 0.9-1.0

145x145 25°/25° 365° 180 2-25

	CODE
	119230J0
	119230U0

## ALWAYS USE

transformer



	CODE
12V   60W	90221902
12V   105W	90221903



PRIVATE RESIDENCE BRUGGE | BELGIUM

# OBOQ ROUND

CEILING RECESSED



## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

0.98kg IP20 3-0.3-D P 38°

140 25°/25° 365° 150 2-25

CODE	
	120168J_
	120168E_
	120168K_

## Light Colour Selection

LUMEN   CRI	CODE
2700K 715   >80	2
3000K 730   >80	4

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium | steel powder coated

0.70kg IP20 3-0.9-D

140 25°/25° 365° 150 2-25

CODE	
	120130JO
	120130EO
	120130KO

## ALWAYS USE

transformer




CODE	
12V   60W	90221902
12V   105W	90221903





# OBOQ SQUARE

CEILING RECESSED

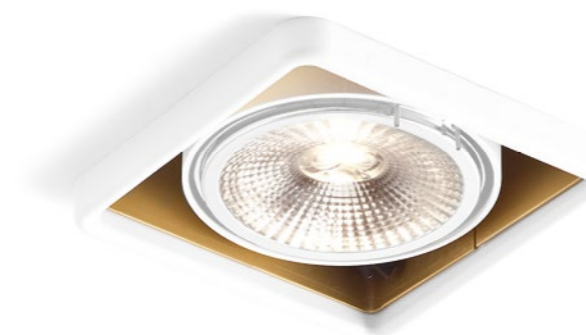

## 1.0 LED111

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium | steel powder coated

1.02kg IP20  $\pm 0.3^\circ$   $\text{P}$   $\star 38^\circ$

138x138  $\angle 25^\circ/25^\circ$   $\sphericalangle 365^\circ$   $\text{L} 150$   $\text{E} 2-25$

## 1.0 QR111

QR111 max.75W | G53  
12V | excl. transformer  
aluminium | steel powder coated

0.84kg  $\text{IP20}$   $\pm 0.9^\circ$

138x138  $\angle 25^\circ/25^\circ$   $\sphericalangle 365^\circ$   $\text{L} 150$   $\text{E} 2-25$

		CODE
		120268J_
		120268E_
		120268K_


		CODE
		120230JO
		120230EO
		120230KO

## Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

## ALWAYS USE

		CODE
12V   60W		90221902
12V   105W		90221903





# SLALOM

CEILING RECESSED



**1.0**

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated  
matt chrome

0.08kg IP20 0.9m

70 60 2-25

CODE

121110H0

121110M0

**ALWAYS USE**

transformer

CODE

12V | 60W

90221902

12V | 105W

90221903



# SPINO

CEILING RECESSED



## 1.0 MR16

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
aluminium powder coated  
matt chrome

0.35kg IP20 0.9-1.2

82 45°/45° 355° 65 2-25

	CODE
	122110H0
	122110M0

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
matt chrome

0.35kg IP20 0.9-1.2

82 45°/45° 355° 130 2-18

	CODE
	122120H0
	122120M0

## ALWAYS USE

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# SPYDER

CEILING RECESSED



## 1.0 LED

LED 7/10W | 350-500mA | 18Vf  
 COB 3-step | excl. power supply  
 aluminium | steel powder coated

1.10kg IP20 0.3-1.0 36°

145 85° 355° 90 4-25

## 1.0 PAR16

PAR16 max.50W | GU10  
 220-240VAC | 50-60Hz  
 aluminium | steel powder coated

1.10kg IP20 0.9-1.0

145 85° 355° 90 4-25

	CODE
	124161W_
	124161E_

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	420-590	>90	3
3000K	470-640	>90	5
1800-2850K	320-440	>90	9

## ALWAYS USE

power supply

	CODE
350mA   10W	90213402
500mA   10W	90214403
500mA   15W dim	90224501

more power supplies on page 468

	CODE
	124120W0
	124120E0

## OPTIONAL




PAR16 LED GU10 6W  
 phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



SEEK  
CEILING RECESSED



**1.0 LED**

LED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

0.52kg IP20 0.3-1 P 36°

100x84 35°/35° 25°/25° 120 10-25

3000K | >80 CRI | 350-465lm

CODE
128161W4
128161B4

**ALWAYS USE**

power supply

CODE
350mA   6W 90213202
500mA   10W 90214403

more power supplies on page 468

**2.0 LED**

2xLED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

0.93kg IP20 0.3-1 P 36°

100x166 35°/35° 25°/25° 120 10-25

3000K | >80 CRI | 2x350-465lm

CODE
128261W4
128261B4

**ALWAYS USE**

power supply

CODE
350mA   6W 90213202
500mA   10W 90214403

more power supplies on page 468

**3.0 LED**

3xLED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

1.35kg IP20 0.3-1 P 36°

100x248 35°/35° 25°/25° 120 10-25

3000K | >80 CRI | 3x350-465lm

CODE
128361W4
128361B4

**ALWAYS USE**

power supply

CODE
350mA   6W 90213202
500mA   10W 90214403


more power supplies on page 468





# SEEK GAP

CEILING RECESSED



## 1.0 LED

LED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

0.46kg IP20 0.3° P A 36°

98x98 35°/35° 25°/25° 120 10-25


3000K | >80 CRI | 350-465lm

	CODE
	128461W4
	128461E4
	128461B4

## ALWAYS USE

	CODE
plasterkit	90017107
power supply	
	CODE
350mA   6W	90213202
500mA   10W	90214403

more power supplies on page 468



## 2.0 LED

2xLED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | stainless steel

0.78kg IP20 0.3° P A 36°

98x180 35°/35° 25°/25° 120 10-25


3000K | >80 CRI | 2x350-465lm

	CODE
	128561W4
	128561E4
	128561B4

## ALWAYS USE

	CODE
plasterkit	90017108
power supply	
	CODE
350mA   6W	90213202
500mA   10W	90214403

more power supplies on page 468



## 3.0 LED

3xLED 5/7W | 350-500mA | 13Vf  
COB 3-step | excl. power supply  
aluminium | steel powder coated

1.17kg IP20 0.3° P A 36°

98x262 35°/35° 25°/25° 120 10-25

3000K | >80 CRI | 3x350-465lm

	CODE
	128661W4
	128661E4
	128661B4



## ALWAYS USE

	CODE
plasterkit	90017109
power supply	
	CODE
350mA   6W	90213202
500mA   10W	90214403

more power supplies on page 468



**NOP**  
CEILING RECESSED



**1.0 MR16**

QR-CBC51 max.50W | GU5.3  
12V | excl. transformer  
steel powder coated

0.28kg IP20 0.9m

90° 12°/12° 155 2-30

**1.0 PAR16**

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
steel powder coated

0.30kg IP20 0.9m

90° 12°/12° 155 2-30

	CODE
	130210W0
	130210S0

	CODE
	130220W0
	130220S0

**ALWAYS USE**

transformer

	CODE
12V   60W	90221902
12V   105W	90221903

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim





	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# PLUXO

CEILING SURFACE



## 1.0 LED

LED 8W | 220-240V | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.53kg | IP20 | ±0.3° | 36°  
45°/45° | 10°

Light Colour Selection	LUMEN   CRI	CODE
2700K	470   >90	3
3000K	470   >90	5
1800-2850K	410   >90	9

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.41kg | IP20 | ±0.9° | 13°  
45°/45° | 13°

Light Colour Selection	LUMEN   CRI	CODE
2700K	2x470   >90	3
3000K	2x470   >90	5
1800-2850K	2x410   >90	9

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

Light Colour Selection	LUMEN   CRI	CODE
2700K	901228W2	
3000K	901228W4	
1800-2850K	901229S9	

more lamps and specs on page 471

## 2.0 LED

2xLED 8W | 220-240V | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.06kg | IP20 | ±0.3° | 36°  
45°/45° | 10°

Light Colour Selection	LUMEN   CRI	CODE
2700K	2x470   >90	3
3000K	2x470   >90	5
1800-2850K	2x410   >90	9

## Light Colour Selection

Light Colour Selection	LUMEN   CRI	CODE
2700K	2x470   >90	3
3000K	2x470   >90	5
1800-2850K	2x410   >90	9

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.82kg | IP20 | ±0.9° | 13°  
45°/45° | 13°


Light Colour Selection	LUMEN   CRI	CODE
2700K	2x470   >90	3
3000K	2x470   >90	5
1800-2850K	2x410   >90	9

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

Light Colour Selection	LUMEN   CRI	CODE
2700K	901228W2	
3000K	901228W4	
1800-2850K	901229S9	

more lamps and specs on page 471

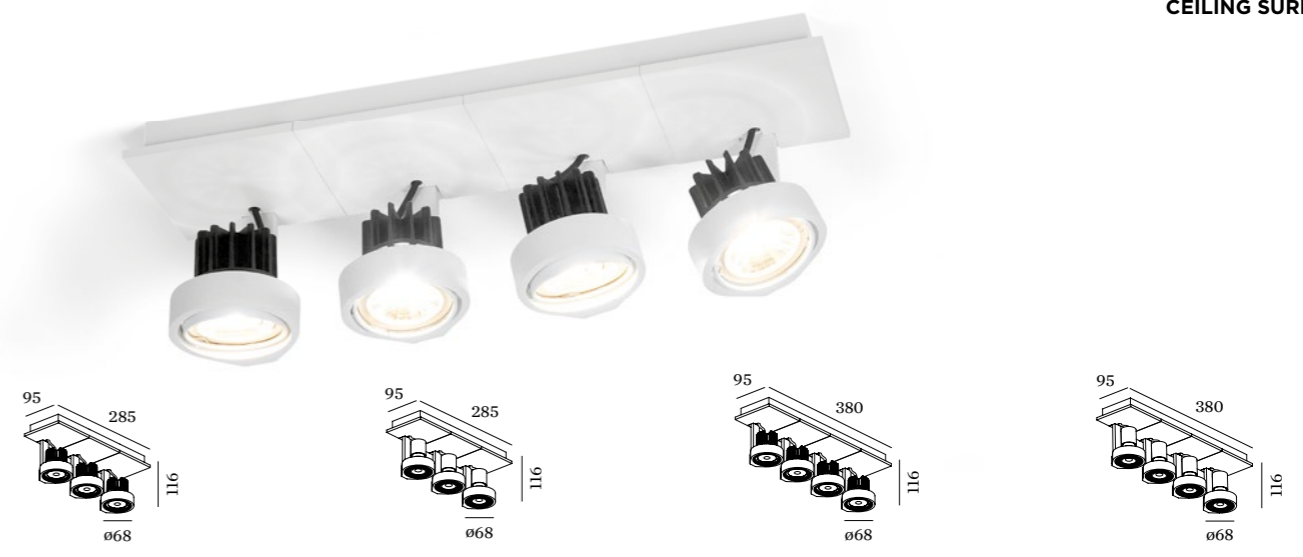

**3.0 LED**

3xLED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.59kg IP20  $\pm 0.3^\circ$   $\pm 36^\circ$   
45°/45°  $\pm 10^\circ$

CODE
142364W
142364S
142364B

**Light Colour Selection**

LUMEN	CRI	CODE
2700K	3x470   >90	3
3000K	3x470   >90	5
1800-2850K	3x410   >90	9

**3.0 PAR16**

3xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

1.23kg IP20  $\pm 0.9^\circ$   
45°/45°  $\pm 13^\circ$

CODE
142320W0
142320S0
142320B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 471

**4.0 LED**

4xLED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

2.12kg IP20  $\pm 0.3^\circ$   $\pm 36^\circ$   
45°/45°  $\pm 10^\circ$

CODE
142464W
142464S
142464B

**Light Colour Selection**

LUMEN	CRI	CODE
2700K	4x470   >90	3
3000K	4x470   >90	5
1800-2850K	4x410   >90	9

**4.0 PAR16**

4xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

1.64kg IP20  $\pm 0.9^\circ$   
45°/45°  $\pm 13^\circ$

CODE
142420W0
142420S0
142420B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim


CODE
2700K 901228W2
3000K 901228W4
1800-2850K 901229S9

more lamps and specs on page 471



# PLUXO#2

CEILING SURFACE



## 1.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.82kg IP20

45°/45° 13°

### CODE

White	142520W0
Grey	142520S0
Black	142520B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

### CODE


2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# PLUXO

## CEILING SURFACE



### 1.0 LED111

LED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


0.93kg IP20  $\text{S}+0.3+D$   $\text{P}$   $\text{A}$  38°

$\text{C}$  45°/45°  $\text{U}$  45°/45°

	CODE
	143168W
	143168S
	143168B

#### Light Colour Selection

LUMEN   CRI	CODE
2700K 715   >80	2
3000K 730   >80	4



### 2.0 LED111

2xLED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


1.86kg IP20  $\text{S}+0.3+D$   $\text{P}$   $\text{A}$  38°

$\text{C}$  45°/45°  $\text{U}$  45°/45°

	CODE
	143268W
	143268S
	143268B

#### Light Colour Selection

LUMEN   CRI	CODE
2700K 2x710   >80	2
3000K 2x730   >80	4



### 3.0 LED111

3xLED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


2.79kg IP20  $\text{S}+0.3+D$   $\text{P}$   $\text{A}$  38°

$\text{C}$  45°/45°  $\text{U}$  45°/45°

	CODE
	143368W
	143368S
	143368B

#### Light Colour Selection

LUMEN   CRI	CODE
2700K 3x710   >80	2
3000K 3x730   >80	4



### 4.0 LED111

4xLED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

3.72kg IP20  $\text{S}+0.3+D$   $\text{P}$   $\text{A}$  38°

$\text{C}$  45°/45°  $\text{U}$  45°/45°

	CODE
	143468W
	143468S
	143468B

#### Light Colour Selection


LUMEN   CRI	CODE
2700K 4x710   >80	2
3000K 4x730   >80	4



VISUALISATION

# PLUXO#2

CEILING SURFACE



## 1.0 LED111

2xLED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

1.86kg IP20 0.3m 38°

45°/45° 45°/45°

CODE
143568W
143568S
143568B



### Light Colour Selection

	LUMEN   CRI	CODE
2700K	2x640   >80	2
3000K	2x680   >80	4



# SOLID

## CEILING SURFACE



### 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.65kg IP20 0,3-1° 36°

25°/25° 355°

### 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.61kg IP20 0,9-1°

25°/25° 355°

	CODE
	133164W_
	133164K_
	133164P_
	133164B_

	CODE
	133120W0
	133120K0
	133120P0
	133120B0

### Light Colour Selection



	LUMEN   CRI	CODE
2700K	470   >90	3
3000K	470   >90	5
1800-2850K	410   >90	9

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471











# SIRRA

## CEILING SURFACE



### 1.0 LED

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.86kg | IP20 | 0,3-D | 36°

35°/35° | 355°

	CODE
	134164W_
	134164E_
	134164F_
	134164B_

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	590   >90	3
3000K	640   >90	5
1800-2850K	440   >90	9

### 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.74kg | IP20 | 0,9-D

35°/35° | 355°

	CODE
	134120W0
	134120E0
	134120F0
	134120B0

### OPTIONAL



PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



SIRRO  
CEILING SURFACE



**1.0 LED**

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.85kg IP20 0.3-10 A 36°  
35°/35° 355°

	CODE
	139164W_
	139164E_
	139164F_
	139164B_

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	640	>90	5
1800-2850K	440	>90	9

**1.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.81kg IP20 0.9-10 A 36°  
35°/35° 355°


	CODE
	139120W0
	139120E0
	139120F0
	139120B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



**2.0 LED**

2xLED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed


1.57kg IP20 0.3-1 P 36°

35°/35° 355°

	CODE
	139264W_
	139264E_
	139264F_
	139264B_

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	2x590	>90	3
3000K	2x640	>90	5
1800-2850K	2x440	>90	9



**2.0 PAR16**

2xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.51kg IP20 0.9-1

35°/35° 355°


	CODE
	139220W0
	139220E0
	139220F0
	139220B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



**3.0 LED**

3xLED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed

2.21kg IP20 0.3-1 P 36°

35°/35° 355°


	CODE
	139364W_
	139364E_
	139364F_
	139364B_

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	3x590	>90	3
3000K	3x640	>90	5
1800-2850K	3x440	>90	9

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



**3.0 PAR16**

3xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.51kg IP20 0.9-1

35°/35° 355°

	CODE
	139320W0
	139320E0
	139320F0
	139320B0

**OPTIONAL**



PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



VISUALISATION



**1.6**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
brushed | opal PMMA cover

1.00kg IP44

3000K | >80 CRI | 600lm

CODE  
135183W4  
135183L4

**2.6**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
brushed | opal PMMA cover

1.55kg IP44

3000K | >80 CRI | 1000lm

CODE  
135283W4  
135283L4

**3.5**

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
brushed | opal PMMA cover





2.45kg IP44

3000K | >80 CRI | 1600lm

CODE  
135383W4  
135383L4



CORY  
CEILING SURFACE



**1.3**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.47kg IP20 30°

3000K | >85 CRI | 930lm

CODE

136173W4

**1.6**

LED 9W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.52kg IP20 30°

3000K | >85 CRI | 1160lm

CODE

136273W4

**1.9**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.63kg IP20 30°

3000K | >85 CRI | 930lm

CODE

136373W4

**2.1**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.74kg IP20 30°



3000K | >85 CRI | 1550lm

CODE

136473W4



CORY  
CEILING SURFACE



**2.6**

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

0.99kg | IP20 | 0.3°

3000K | >85 CRI | 2130lm

CODE  
136574W4

**3.4**

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium





1.46kg | IP20 | 0.3°

3000K | >85 CRI | 2810lm

CODE  
136674W4



CORO  
CEILING SURFACE



**1.1**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.37kg IP20

3000K | >85 CRI | 930lm

CODE

137173W4

**1.3**

LED 9W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.43kg IP20

3000K | >85 CRI | 1340lm

CODE

137273W4

**1.4**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.62kg IP20

3000K | >85 CRI | 670lm

CODE

137373W4

**1.6**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
corian® glacier white | aluminium

0.76kg IP20

3000K | >85 CRI | 1550lm



CODE

137473W4





CORO  
CEILING SURFACE

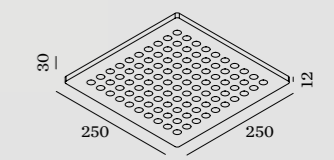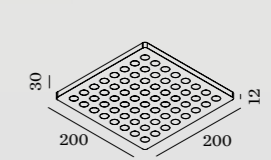

**2.0**

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

1.59kg IP20

3000K | >85 CRI | 2130lm

CODE  
137674W4

**2.5**

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

1.79kg IP20



3000K | >85 CRI | 2810lm

CODE  
137774W4



# MUST

## CEILING SURFACE



### 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
brushed

0.47kg IP20 36°

90°/90°

3000K | >80 CRI | 420lm

	CODE
	140163W4
	140163L4
	140163D4

### 2.0

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
brushed



0.35kg IP20 36°

3000K | >80 CRI | 420lm

	CODE
	140263W4
	140263L4
	140263D4



# BOX CEILING SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.67kg IP20 0.3-1° 36°

Color	CODE
White	146164W
Grey	146164L
Gold	146164G
Bronze	146164Q
Copper	146164P
Black	146164B

## Light Colour Selection

Light Colour	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

## 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.66kg IP20 0.9-1°

Color	CODE
White	146120W0
Grey	146120L0
Gold	146120G0
Bronze	146120Q0
Copper	146120P0
Black	146120B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


Light Colour	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## OPTIONAL

inner reflector max. 10 W

Color	CODE
White	911211W1
Gold	911211G1
Black	911211B1



inner cover max. 10 W

Color	CODE
White	911011W1
Gold	911011G1
Black	911011B1









# BOX

CEILING SURFACE



## 2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.17kg IP20  $\Sigma$ -0,3-D  $\Phi$   $\Delta$  36°

Color	CODE
White	146264W
Grey	146264L
Gold	146264G
Brown	146264Q
Red	146264P
Black	146264B

### Light Colour Selection

Color	LUMEN   CRI	CODE
2700K	2x480   >80	2
3000K	2x480   >80	4
1800-2850K	2x410   >90	9

## 2.0 PAR16

2xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.13kg IP20  $\Sigma$ +0,9-D

Color	CODE
White	146220W0
Grey	146220L0
Gold	146220G0
Brown	146220Q0
Red	146220P0
Black	146220B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


Color	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

inner reflector max. 10 W

Color	CODE
White	911211W1
Gold	911211G1
Black	911211B1



inner cover max. 10 W



Color	CODE
White	911011W1
Gold	911011G1
Black	911011B1





# DOCUS

CEILING SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.57kg IP20 0.3+D P A 36°

	CODE
	146364W
	146364L
	146364G
	146364P
	146364B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

## 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.55kg IP20 0.9+D

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

inner cover max. 10 W

	CODE
	911021W1
	911021G1
	911021B1








VISUALISATION

# DOCUS

CEILING SURFACE

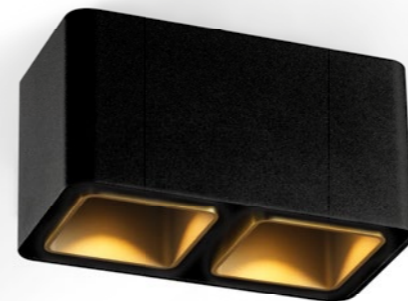

## 2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.06kg IP20 0.3m 36°

	CODE
	146464W
	146464L
	146464G
	146464P
	146464B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x480	>80	2
3000K	2x480	>80	4
1800-2850K	2x410	>90	9

## 2.0 PAR16

2xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.01kg IP20 0.9m

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

inner cover max. 10 W



	CODE
	911021W1
	911021G1
	911021B1





VISUALISATION

# HEXO CEILING SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.65kg IP20 36°

	CODE
	146564W
	146564G
	146564Q
	146564P
	146564B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

## 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.63kg IP20

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

inner cover max. 10 W

	CODE
	911031W1
	911031G1
	911031B1









# HEXO

CEILING SURFACE



## 2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz  
 COB 2-step | incl. PS | phase-cut dim  
 aluminium powder coated  
 brushed

1.23kg IP20  $\pm 0.3^\circ$   $\triangle 36^\circ$

	CODE
	146664W
	146664G
	146664Q
	146664P
	146664B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	2x480   >80	2
3000K	2x480   >80	4
1800-2850K	2x410   >90	9

## 2.0 PAR16

2xPAR16 max.35W | GU10  
 220-240VAC | 50-60Hz  
 aluminium powder coated  
 brushed

1.19kg IP20  $\pm 0.9^\circ$

	CODE
	146620W0
	146620G0
	146620Q0
	146620P0
	146620B0

### OPTIONAL

PAR16 LED GU10 6W  
 phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### OPTIONAL

inner cover max. 10 W



	CODE
	911031W1
	911031G1
	911031B1







RAY  
CEILING SURFACE



**1.0 LED**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.63kg IP20 0,3-1 36°

CODE
146764W
146764L
146764G
146764Q
146764P
146764B

**Light Colour Selection**

LUMEN	CRI	CODE
2700K	480   >80	2
3000K	480   >80	4
1800-2850K	410   >90	9

**1.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.61kg IP20 0,9-1

CODE
146720W0
146720L0
146720G0
146720Q0
146720P0
146720B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

CODE
901228W2
901228W4
901229S9

more lamps and specs on page 471

**OPTIONAL**

inner cover max. 10 W

CODE
911041W1
911041G1
911041B1








SHOWROOM PATRICK PONSEELE | DIRK COUSAERT - GROEP INTERIEUR ANZEGEM | BELGIUM

# BEBOW

## CEILING SURFACE

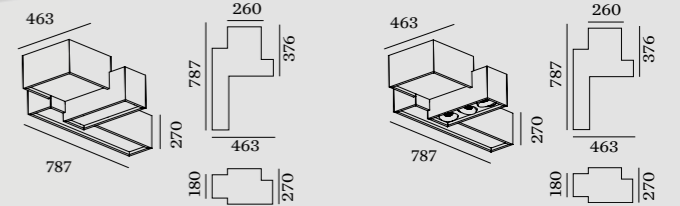

### 1.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

6.30kg IP20  $\pm 0.3$

3000K | >80 CRI | 1820lm

### 2.0

LED 55W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 3x spot | two circuits  
aluminium powder coated  
opal PMMA cover

6.70kg IP20  $\pm 0.3$

3000K | >80 CRI | 3250lm



DESIGNED BY S&R CORNELISSEN

CODE

132184W4

132184B4

CODE

132164W4


132164B4

WEVER & DUCRÉ 150 – 151



# BEBOW

## CEILING SURFACE




### 3.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

8.00kg IP20  $\pm 0.3$

3000K | >80 CRI | 1910lm

	CODE
	132284W4
	132284B4



### 4.0

LED 48W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 2x spot | two circuits  
aluminium powder coated  
opal PMMA cover

8.30kg IP20  $\pm 0.3$

3000K | >80 CRI | 2850lm




	CODE
	132264W4
	132264B4





# VENN

## CEILING SURFACE

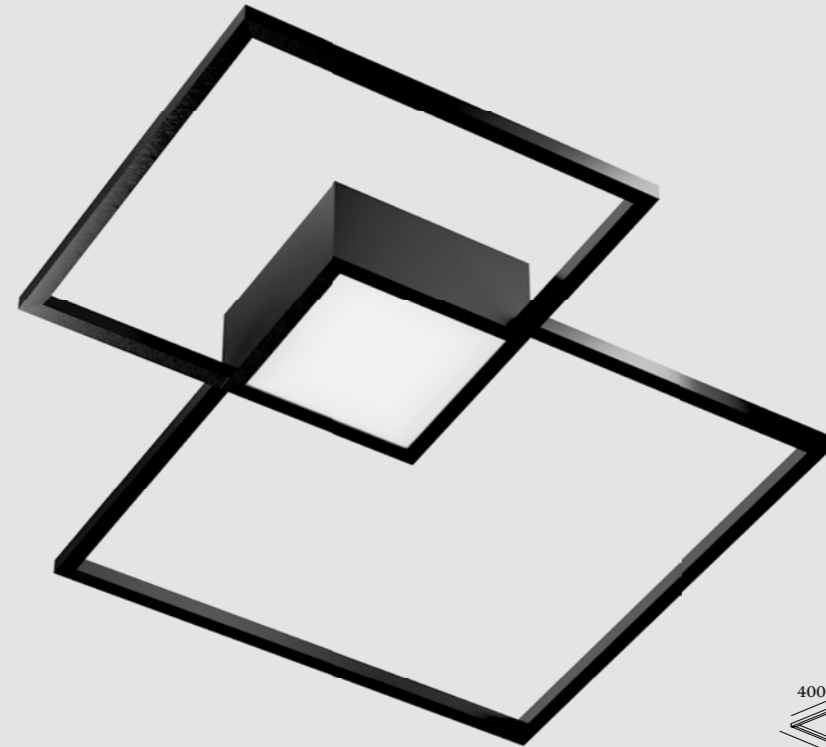

### 1.0

LED 30W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.50kg IP20  $\pm$  0.3+D P

3000K | >80 CRI | indirect 2500lm

	CODE
	149184W4
	149184B4

### 2.0

LED 47W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.50kg IP20  $\pm$  0.3+D P


3000K | >80 CRI | direct 400lm  
indirect 2500lm

	CODE
	149284W4
	149284B4



VISUALISATION

J.J.W.  
CEILING SURFACE



**03**

3x QA60 max. 53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

4.00kg IP20  $\pm 0,9^\circ$

	CODE
	2051E8S0
	2051E8G0

**OPTIONAL**

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472

DESIGNED BY JULES WABBES



WEVER & DUCRÉ 156 – 157





# ROCK COLLECTION

## CEILING SURFACE



### 1.0

E26-E27 max.100W  
110-220VAC | 50-60Hz  
stone veneer | MDF lacquered

3-5kg IP20 0.9m

### 2.0

E26-E27 max.100W  
110-220VAC | 50-60Hz  
stone veneer | MDF lacquered

3.5-5.5kg IP20 0.9m

370mm	CODE
	2211E8W0
	2211E8S0
	2211E8D0

370mm	CODE
	2212E8W0
	2212E8S0
	2212E8D0

560mm	CODE
	2213E8W0
	2213E8S0
	2213E8D0

560mm	CODE
	2214E8W0
	2214E8S0
	2214E8D0

740mm	CODE
	2215E8W0
	2215E8S0
	2215E8D0

740mm	CODE
	2216E8W0
	2216E8S0
	2216E8D0

### OPTIONAL

QA60 LED E27 6W	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	9003E111
2200K   400lm	

G95 LED E27 9W opal	9003E126
2700K   806lm	

more lamps and specs on page 472




### OPTIONAL

QA60 LED E27 6W	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	9003E111
2200K   400lm	

G95 LED E27 9W opal	9003E126
2700K   806lm	

more lamps and specs on page 472





ROB  
CEILING SURFACE




**1.6**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

0.80kg IP44

3000K | >80 CRI | 600lm

CODE  
701183W4  
701183S4




**2.6**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

1.30kg IP44

3000K | >80 CRI | 1000lm

CODE  
701283W4  
701283S4



**3.5**

LED 20W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

2.00kg IP44


3000K | >80 CRI | 1600lm

CODE  
701383W4  
701383S4



# SQUBE on base

CEILING SURFACE



## 1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.43kg IP20 3-0,3-D 36°

90° 355°

CODE
144264W
144264B

### Light Colour Selection

	LUMEN   CRI	CODE
2200K	315   >80	1
2700K	480   >80	2
3000K	480   >80	4

## OPTIONAL

dimmer

	CODE
for switch	90019017
for din rail	90019018

more specs on page 470



## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.43kg IP20 3-0,9-D

90° 355°


CODE
144220W0
144220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



## 2.0 LED

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.38kg IP20 3-0,3-D 24°

90° 355°

CODE
144464W
144464B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	780   >80	2
3000K	810   >80	4

## OPTIONAL

dimmer


	CODE
for switch	90019017
for din rail	90019018

more specs on page 470



# SQUBE on track

CEILING SURFACE



## 1.0 LED

LED 6W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
incl. 1-phase track adapter

0.36kg | IP20 | 3+D | 36°

90° | 355°

CODE
144164W
144164B

### Light Colour Selection

LUMEN   CRI	CODE
2200K 320   >80	1
2700K 480   >80	2
3000K 480   >80	4


more 1-phase track accessories on page 480

### OPTIONAL

dimmer

CODE
90019017
90019018

more specs on page 470



## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
incl. 1-phase track adapter

0.32kg | IP20 | 3+D | 36°

90° | 355°

CODE
144120W0
144120B0


### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

CODE
901228W2
901228W4
901229S9

more lamps and specs on page 471

more 1-phase track accessories on page 480



## 2.0 LED

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
incl. 3-phase track adapter

0.36kg | IP20 | 3+D | 24°

90° | 355°

CODE
144364W
144364B

### Light Colour Selection

LUMEN   CRI	CODE
2700K 780   >80	2
3000K 810   >80	4

### OPTIONAL

dimmer


CODE
90019017
90019018

for switch

for din rail


more specs on page 470



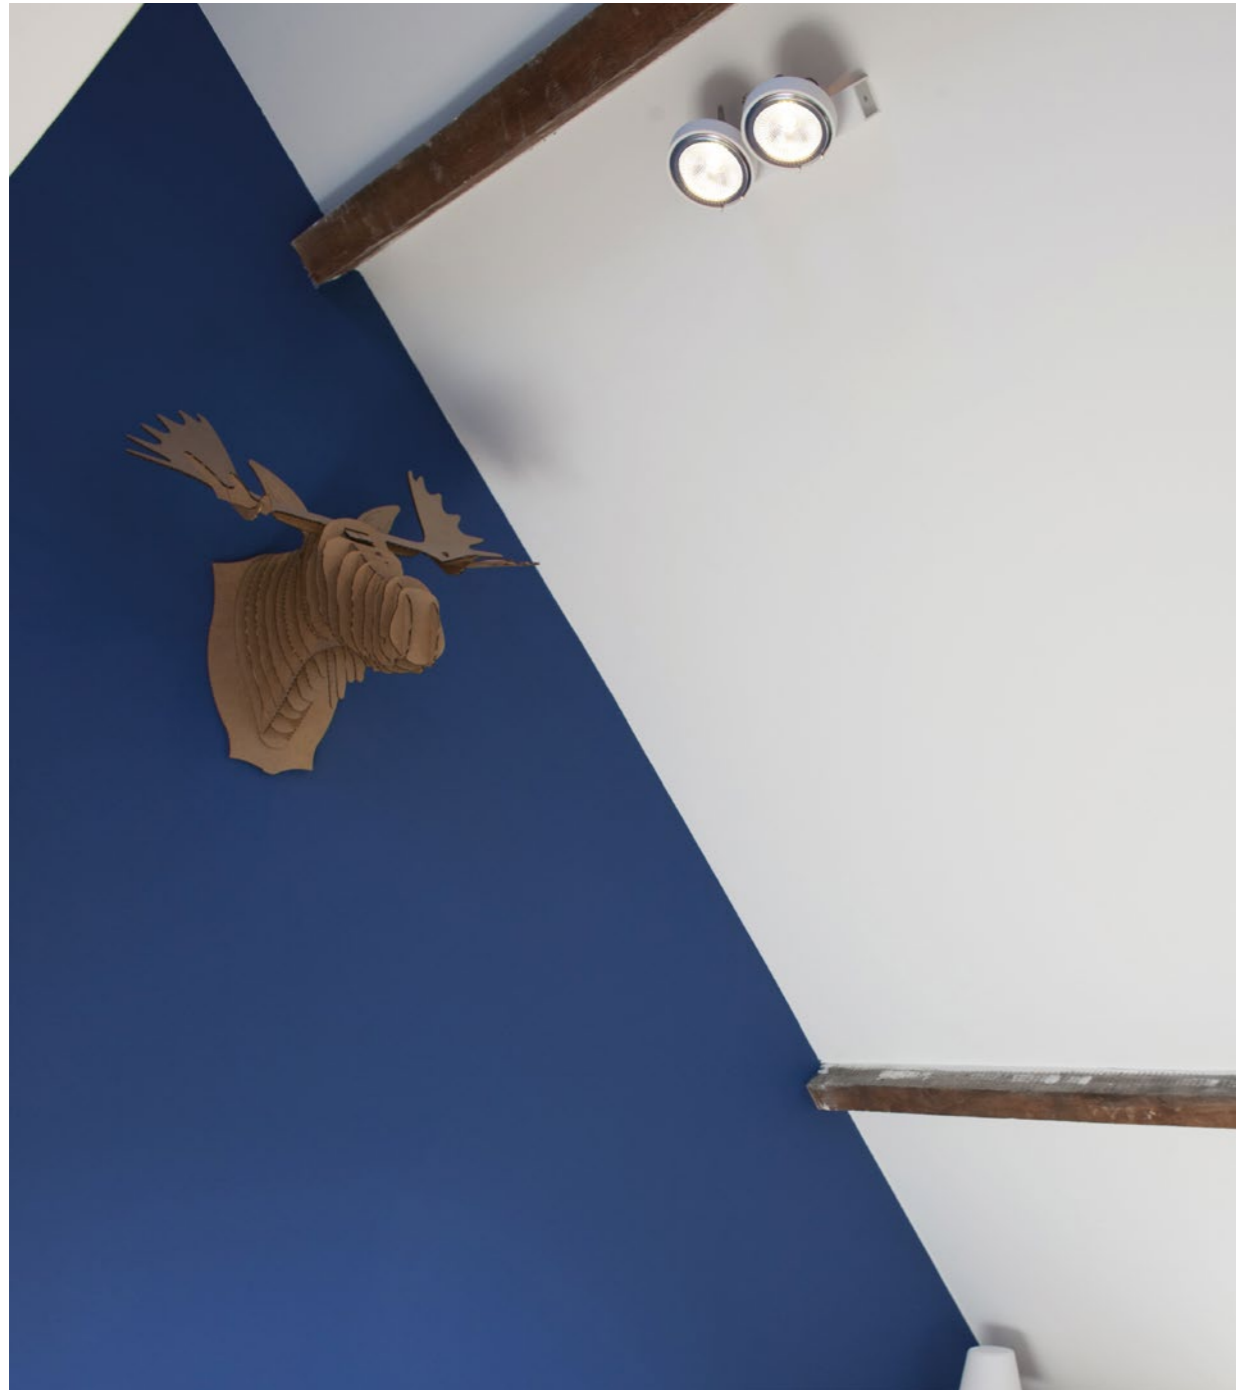

GO-ON

CEILING SURFACE



**1.0 LED111**

LED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


1.70kg IP20 0.3m P A 38°

45°/45° 45°/45°

CODE	
	116168W
	116168S

**Light Colour Selection**

LUMEN   CRI	CODE
2700K 715   >80	2
3000K 730   >80	4



**2.0 LED111**

2xLED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated


2.80kg IP20 0.3m P A 38°

45°/45° 45°/45°

CODE	
	116268W
	116268S

**Light Colour Selection**

LUMEN   CRI	CODE
2700K 2x715   >80	2
3000K 2x730   >80	4



**3.0 LED111**

3xLED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated

4.20kg IP20 0.3m P A 38°

45°/45° 45°/45°

CODE	
	116368W
	116368S


**Light Colour Selection**

LUMEN   CRI	CODE
2700K 3x715   >80	2
3000K 3x730   >80	4



# PLUXO on track

CEILING SURFACE



## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
incl. 1-phase track adapter

0.41kg IP20 0.9°

45°/45° 13°

	CODE
	142620W0
	142620B0


## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

more 1-phase track accessories on page 480



## 1.0 LED111

LED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 1-phase track adapter

0.93kg IP20 0.3° 38°


45°/45° 45°/45°

	CODE
	143668W_
	143668B_

## Light Colour Selection

	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4

more 1-phase track accessories on page 480



## 2.0 LED111

LED 13W | 220-240V | 50-60Hz  
AC-COB 3-step | phase-cut dim  
aluminium powder coated  
incl. 3-phase track adapter

0.96kg IP20 0.3° 38°

45°/45° 45°/45°

	CODE
	143968W_
	143968B_

## Light Colour Selection


	LUMEN   CRI	CODE
2700K	715   >80	2
3000K	730   >80	4








CONFERENCE ROOM STEINBERG | AUSTRIA

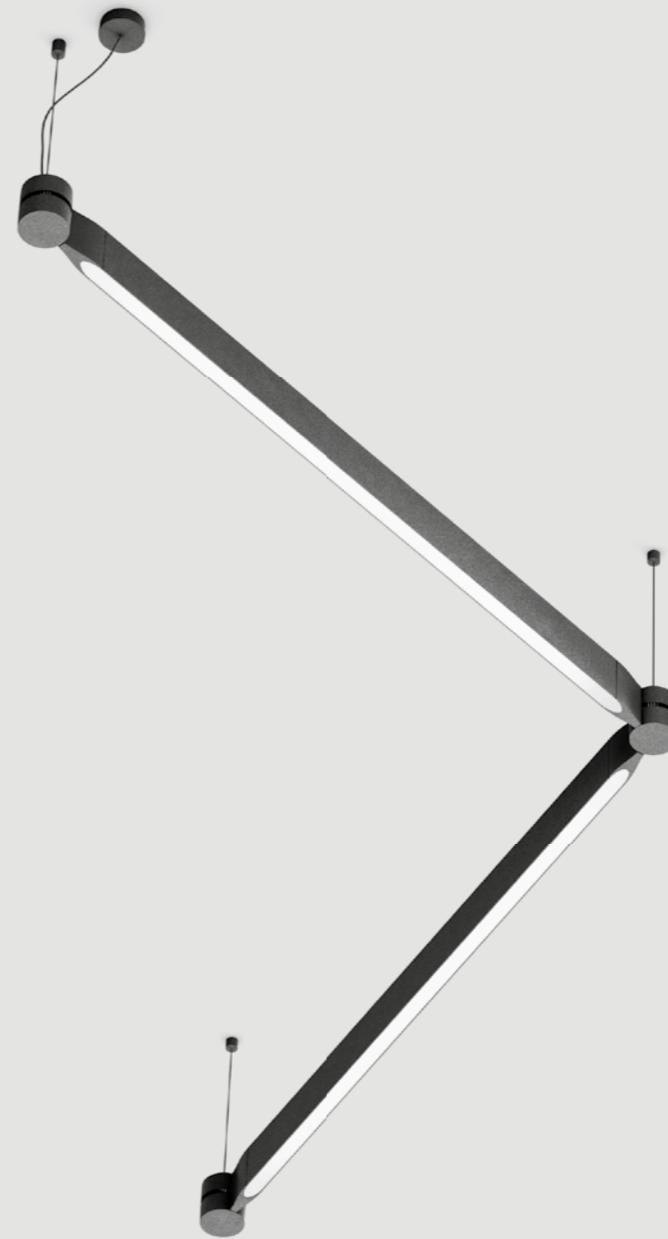

# ELLO SYSTEM

CEILING SURFACE

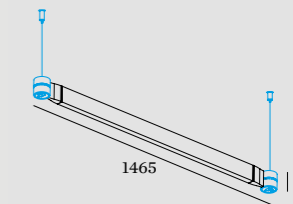



## 1.0

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

1.70kg IP20 0.3m

3000K | >80 CRI | 940lm

	CODE
	500184W4
	500184B4

## ALWAYS USE

connector point	CODE
	900190W1
	900190B1

## OPTIONAL


	CODE
suspension cable 2.0m	90015102
power feeder for suspension	90018001



VISUALISATION

# CONE

CEILING SUSPENDED



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
 COB 3-step | incl. PS | phase-cut dim  
 aluminium powder coated  
 chrome plated | glass

0.55kg | IP20 | 0.3m | 36°


2700K | >80 CRI | 480lm

	CODE
	200184W2
	200184C2
	200184B2



# SIRRA

CEILING SUSPENDED



## 1.0 LED

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed


0.86kg IP20  $\pm 0.3^\circ$   $\triangle 36^\circ$

$\curvearrowright 35^\circ/35^\circ$   $\curvearrowleft 355^\circ$

	CODE
	134264W
	134264E
	134264F
	134264B

## Light Colour Selection

	LUMEN   CRI	CODE
2700K	590   >90	3
3000K	640   >90	5
1800-2850K	440   >90	9



## 1.0 PAR16

PAR16 max. 35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.74kg IP20  $\pm 0.9^\circ$

$\curvearrowright 35^\circ/35^\circ$   $\curvearrowleft 355^\circ$

	CODE
	134220W0
	134220E0
	134220F0
	134220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# LYNER

CEILING SUSPENDED



## 2.5 | 4.5

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
brushed

0.70 | 1.34kg | IP20 |  $\pm 0.3^\circ$  |  $\Delta 36^\circ$

**2.5**  
3000K | >80 CRI | 480lm

	CODE
	201163W4
	201163L4

**4.5**  
3000K | >80 CRI | 480lm

	CODE
	201263W4
	201263L4

## 3.8 | 5.8

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
brushed

1.37 | 2kg | IP20 |  $\pm 0.3^\circ$  |  $\Delta 36^\circ$

**3.8**  
3000K | >80 CRI | 640lm

	CODE
	201363W4
	201363L4


**5.8**  
3000K | >80 CRI | 640lm

	CODE
	201463W4
	201463L4



# CONCRETE TUBE

CEILING SUSPENDED



## 2.0 | 4.0

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
composite | aluminium

1.45 | 1.89kg | IP20 | 0.3 | P

### 2.0

3000K | >80 CRI | 480lm

CODE


202163W4  
202163T4

### 4.0

3000K | >80 CRI | 480lm

CODE

202263W4  
202263T4



## 4.5

LED 13W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
composite | aluminium

3.50kg | IP20 | 0.3 | P

3000K | >80 CRI | 680lm


CODE

202363W4  
202363T4



reddot design award  
winner 2009

DESIGNED BY WALL-Y



**2.0 | 3.0 LED**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69 | 0.86kg IP20  $\varnothing$  0,3- $\nabla$   $\Delta$  36°

**2.0**

200mm

	CODE
	207164W
	207164L
	207164P
	207164B

**3.0**

300mm


	CODE
	207264W
	207264L
	207264P
	207264B

**Light Colour Selection**

	LUMEN   CRI	CODE
2700K	480   >80	2
3000K	480   >80	4
1800-2850K	410   >90	9

**BOX**

**CEILING SUSPENDED**



**2.0 | 3.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62 | 0.79kg IP20  $\varnothing$  0,9- $\nabla$

**2.0**

200mm

	CODE
	207120W0
	207120L0
	207120P0
	207120B0

**3.0**

300mm




	CODE
	207220W0
	207220L0
	207220P0
	207220B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

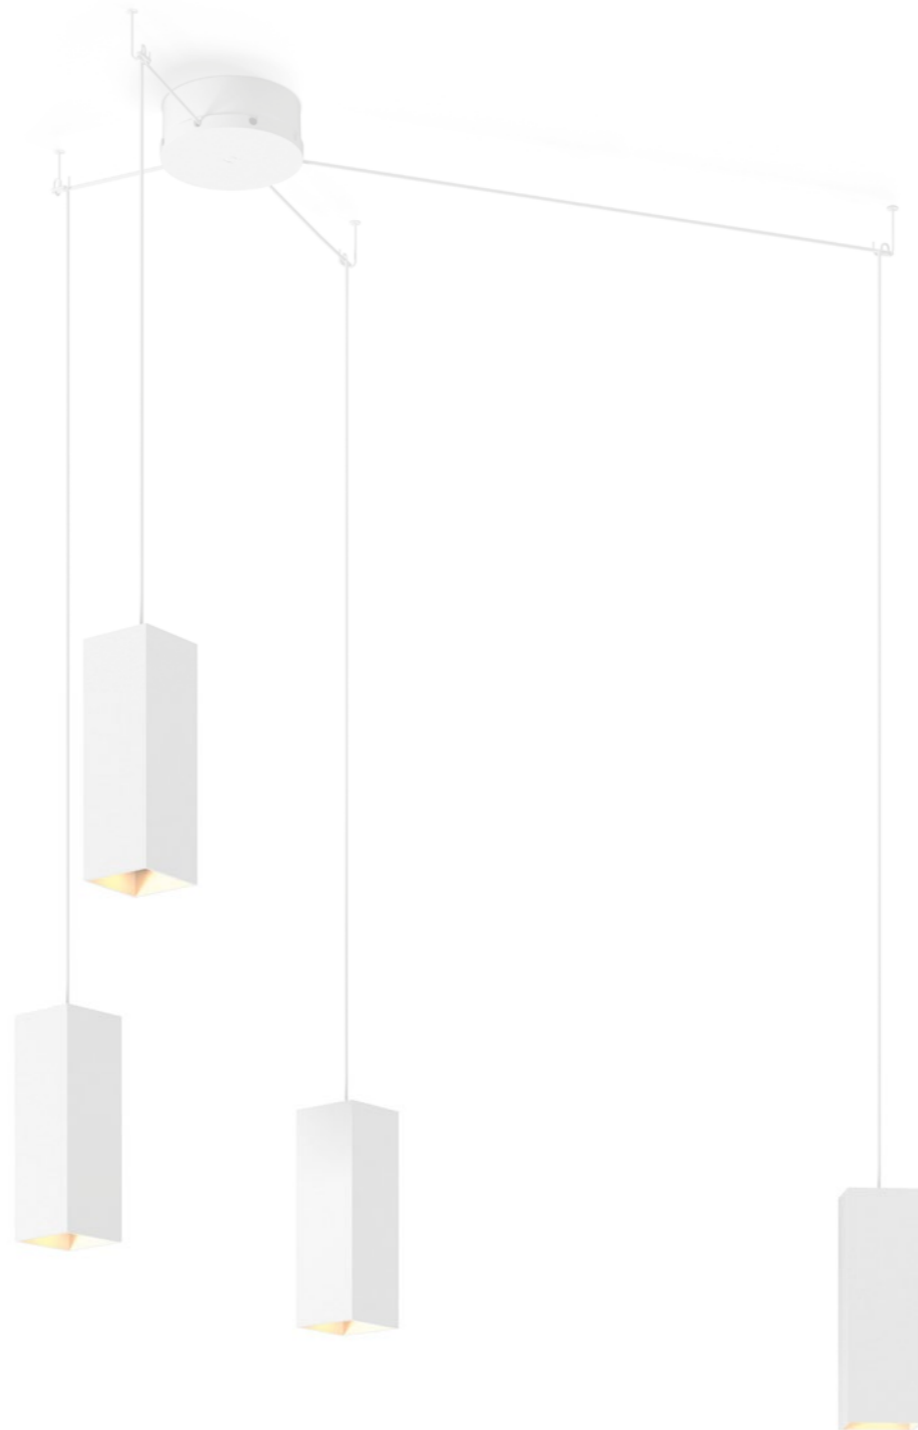

**2.0 | 3.0 LED**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69kg IP20 0.3° 36°

2.0	CODE
200mm	
	227164W
	227164L
	227164P
	227164B

3.0	CODE
300mm	
	227264W
	227264L
	227264P
	227264B

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

**2.0 | 3.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20 0.9°

2.0	CODE
200mm	
	227120W
	227120L
	227120P
	227120B

3.0	CODE
300mm	
	227220W
	227220L
	227220P
	227220B

**OPTIONAL**

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

**BOX MULTI**

**CEILING SUSPENDED**

**ALWAYS USE**

Multiple suspension ceiling base  
round for up to 4 lamps

	CODE
	90052005
	90052006

Connector set for

5 to 8 lamps	90059118
--------------	----------

Multiple suspension ceiling base long  
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps


	CODE
	90052013
	90052014

more information on page 482



# HEXO

## CEILING SUSPENDED



### 2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66 | 0.82kg IP20 0.3-36°

#### 2.0

200mm

	CODE
	207364G
	207364Q
	207364P
	207364B


#### 3.0

300mm

	CODE
	207464G
	207464Q
	207464P
	207464B

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	480   >80	2
3000K	480   >80	4
1800-2850K	410   >90	9



### 2.0 | 3.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.58 | 0.74kg IP20 0.9-1°

#### 2.0

200mm

	CODE
	207320G0
	207320Q0
	207320P0
	207320B0

#### 3.0

300mm

	CODE
	207420G0
	207420Q0
	207420P0
	207420B0


### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9



more lamps and specs on page 471



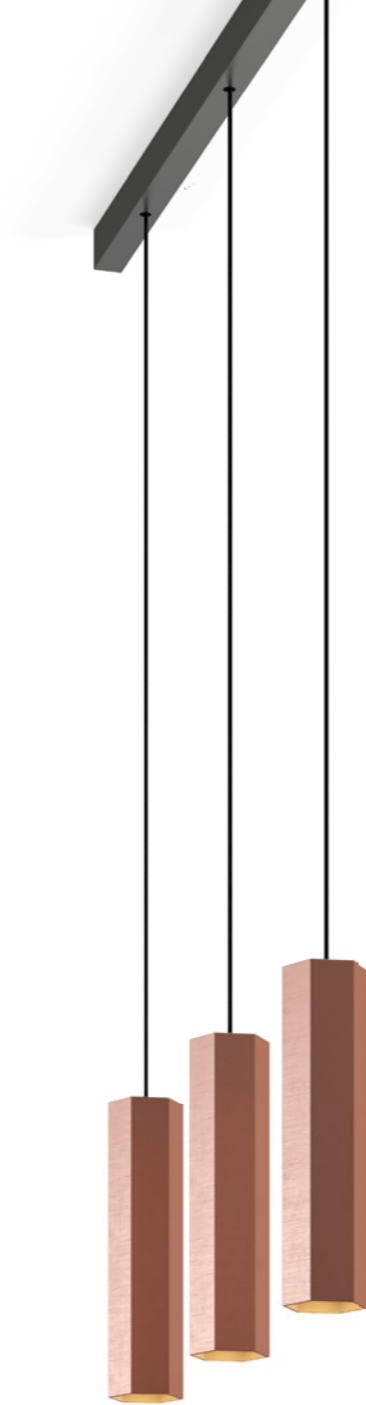

# HEXO MULTI

CEILING SUSPENDED



## 2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.66kg IP20 0.3-1 36°

### 2.0

200mm

	CODE
	227364G
	227364Q
	227364P
	227364B

### 3.0

300mm

	CODE
	227464G
	227464Q
	227464P
	227464B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

## 2.0 | 3.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.58kg IP20 0.9-1

### 2.0

200mm

	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

### 3.0

300mm

	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### ALWAYS USE

Multiple suspension ceiling base  
round for up to 4 lamps

	CODE
	90052005
	90052006

Connector set for  
5 to 8 lamps

	CODE
	90059118

Multiple suspension ceiling base long  
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010


1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps

	CODE
	90052013
	90052014

more information on page 482



**2.0 | 3.0 LED**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69 | 0.85kg IP20 36°

2.0 200mm	CODE
	207564W
	207564L
	207564G
	207564P
	207564B


3.0 300mm	CODE
	207664W
	207664L
	207664G
	207664P
	207664B

**Light Colour Selection**

LUMEN	CRI	CODE
2700K	480   >80	2
3000K	480   >80	4
1800-2850K	410   >90	9

**DOCUS**

**CEILING SUSPENDED**



**2.0 | 3.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62 | 0.75kg IP20 0.9°

2.0 200mm	CODE
	207520W0
	207520L0
	207520G0
	207520P0
	207520B0

3.0 300mm	CODE
	207620W0
	207620L0
	207620G0
	207620P0
	207620B0

**OPTIONAL**




PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

# DOCUS MULTI

CEILING SUSPENDED

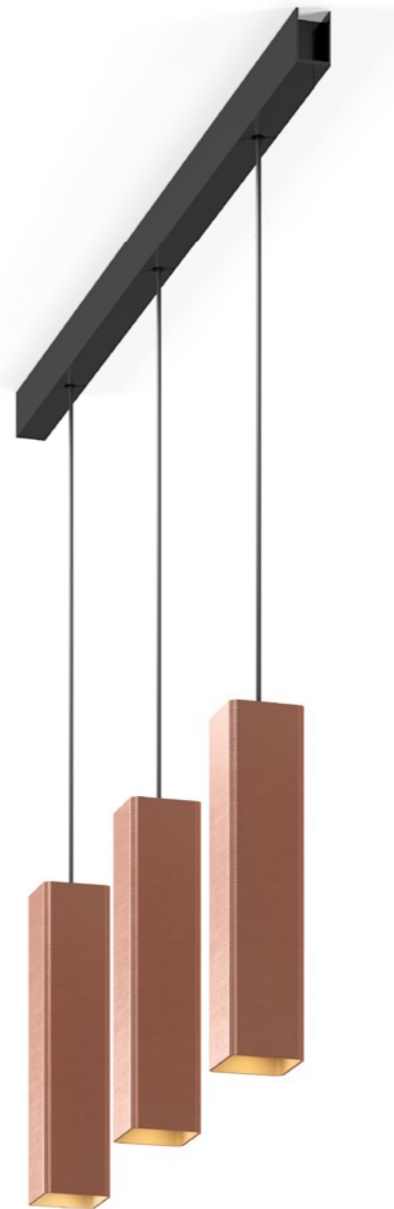

## 2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69kg IP20 0.3+D 36°

2.0	CODE
200mm	227564W
	227564L
	227564G
	227564P
	227564B

3.0	CODE
300mm	227664W
	227664L
	227664G
	227664P
	227664B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

## 2.0 | 3.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20 0.9+D

2.0	CODE
200mm	227520W0
	227520L0
	227520G0
	227520P0
	227520B0

3.0	CODE
300mm	227620W0
	227620L0
	227620G0
	227620P0
	227620B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

### ALWAYS USE

Multiple suspension ceiling base  
round for up to 4 lamps

	CODE
	90052005
	90052006

Connector set for  
5 to 8 lamps 90059118

Multiple suspension ceiling base long  
600mm | 2 lamps

	CODE
	90052007
	90052008

900mm | 3 lamps

	CODE
	90052009
	90052010

1200mm | 4 lamps

	CODE
	90052011
	90052012

1500mm | 5 lamps


	CODE
	90052013
	90052014

more information on page 482



# RAY

CEILING SUSPENDED



## 2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.62 | 0.76kg | IP20 | 0.3° | 36°

### 2.0


200mm	CODE
	207764W
	207764L
	207764P
	207764B

### 3.0

300mm	CODE
	207864W
	207864L
	207864P
	207864B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9



## 2.0 | 3.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.54 | 0.68kg | IP20 | 0.9°

### 2.0

200mm	CODE
	207720W0
	207720L0
	207720P0
	207720B0

### 3.0



300mm	CODE
	207820W0
	207820L0
	207820P0
	207820B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



**2.0 | 3.0 LED**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.62kg IP20 0.3-1.3° 36°

2.0 200mm	CODE
	227764W
	227764L
	227764P
	227764B

3.0 300mm	CODE
	227864W
	227864L
	227864P
	227864B

**Light Colour Selection**

	LUMEN	CRI	CODE
2700K	480	>80	2
3000K	480	>80	4
1800-2850K	410	>90	9

**2.0 | 3.0 PAR16**

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.54kg IP20 0.9-1.3°

2.0 200mm	CODE
	227720W0
	227720L0
	227720P0
	227720B0

3.0 300mm	CODE
	227820W0
	227820L0
	227820P0
	227820B0

**OPTIONAL**

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

**RAY MULTI**

**CEILING SUSPENDED**

**ALWAYS USE**

Multiple suspension ceiling base  
round for up to 4 lamps

	CODE
	90052005
	90052006

Connector set for 5 to 8 lamps	CODE
	90059118

Multiple suspension ceiling base long 600mm   2 lamps	CODE
	90052007
	90052008

900mm   3 lamps	CODE
	90052009
	90052010

1200mm   4 lamps	CODE
	90052011
	90052012



1500mm   5 lamps	CODE
	90052013
	90052014

more information on page 482



# SIRRO

CEILING SUSPENDED



## 1.0 LED

LED 10W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.85kg IP20  $\pm 0,3^\circ$   $\Delta 36^\circ$

$\curvearrowright 35^\circ/35^\circ$   $\downarrow 355^\circ$

	CODE
	139564W_
	139564E_
	139564F_
	139564B_

## Light Colour Selection

	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	640	>90	5
1800-2850K	440	>90	9

## 1.0 PAR16

PAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.80kg IP20  $\pm 0,9^\circ$

$\curvearrowright 35^\circ/35^\circ$   $\downarrow 355^\circ$

	CODE
	139520W0
	139520E0
	139520F0
	139520B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# SIRRO

CEILING SUSPENDED



## 2.0 LED

2xLED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed


1.60kg IP20 35°/35°

35°/35° 355°

	CODE
	139664W
	139664E
	139664F
	139664B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	2x590	>90	3
3000K	2x640	>90	5
1800-2850K	2x440	>90	9



## 2.0 PAR16

2xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

1.52kg IP20 35°/35°

35°/35° 355°


	CODE
	139620W0
	139620E0
	139620F0
	139620B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



## 3.0 LED

3xLED 10W | 220-240VAC  
50-60Hz | COB 3-step  
incl. PS | phase-cut dim  
aluminium powder coated  
brushed

2.30kg IP20 35°/35°

35°/35° 355°


	CODE
	139764W
	139764E
	139764F
	139764B

### Light Colour Selection

	LUMEN	CRI	CODE
2700K	3x590	>90	3
3000K	3x640	>90	5
1800-2850K	3x440	>90	9

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



## 3.0 PAR16

3xPAR16 max.35W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

2.24kg IP20 35°/35°

35°/35° 355°

	CODE
	139720W0
	139720E0
	139720F0
	139720B0

### OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471




VISUALISATION



# PLUXO CLUST

CEILING SUSPENDED



## 2.0 LED111

2xLED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | incl. power supply  
phase-cut dim  
aluminium powder coated


1.86kg IP20 38°

45°/45° 45°/45°

	CODE
	143864W
	143864S

### Light Colour Selection

	LUMEN   CRI	CODE
2700K	2x715   >80	2
3000K	2x730   >80	4



## 4.0 LED111

4xLED 13W | 220-240VAC | 50-60Hz  
AC-COB 3-step | incl. power supply  
phase-cut dim  
aluminium powder coated

2.75kg IP20 38°

45°/45° 45°/45°

	CODE
	143764W
	143764S


### Light Colour Selection

	LUMEN   CRI	CODE
2700K	4x715   >80	2
3000K	4x730   >80	4





ROBY  
CEILING SUSPENDED




**2.6**

LED 12W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
brushed | opal PMMA cover

1.95kg IP20

3000K | >80 CRI | 1000lm

CODE  
135783W4  
135783L4



**3.5**

LED 20W | 220-240VAC  
50-60Hz | PCB 3-step  
aluminium powder coated  
brushed | opal PMMA cover

2.85kg IP20


3000K | >80 CRI | 1600lm

CODE  
135883W4  
135883L4



# CORK

CEILING SUSPENDED



## 1.0

LED 3W | 120-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
fits bottles innerø 16,5 - 19,5 mm

0.24kg IP20 0.3-1 36°

	CODE
	210163W_
	210163B_

### Light Colour Selection

	LUMEN	CRI	CODE
2200K	120	>80	1
2700K	180	>80	2

### OPTIONAL


	CODE
bottle 1	
75/174   glass	90019013
bottle 2	
87/323   glass	90019014





# CORK MULTI

CEILING SUSPENDED



## 1.0

LED 3W | 120-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
fits bottles innerø 16,5 - 19,5 mm

0.24kg | IP20 | 0.3° | 36°

## ALWAYS USE

CORK suspension base round for  
3 to 8 lamps

	CODE
	210263W_
	210263B_

	CODE
	90052015
	90052016

## Light Colour Selection

	LUMEN   CRI	CODE
2200K	120   >80	1
2700K	180   >80	2

CORK suspension base long  
600mm | 2 lamps

	CODE
	90052017
	90052018

## OPTIONAL


	CODE
bottle 1	
75/174   glass	90019013
bottle 2	
87/323   glass	90019014

	CODE
900mm   3 lamps	
	90052019
	90052020

more information on page 482



NOA  
CEILING SUSPENDED




**2.6**

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

1.20kg IP20 0.3-1 P

2700K | >80 CRI | 310lm

	CODE
	204184W2
	204184B2




**3.5**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

1.80kg IP20 0.3-1 P

2700K | >80 CRI | 335lm

	CODE
	204284W2
	204284B2




**4.5**

LED 10W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.50kg IP20 0.3-1 P

2700K | >80 CRI | 630lm

	CODE
	204384W2
	204384B2



**04**

6x QA60 max.53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

4.50kg IP20 0,9m


	CODE
	2052E8S0
	2052E8G0

**OPTIONAL**

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472



**042**

6x QA60 max.53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

8.10kg IP20 0,9m

	CODE
	2056E8S0
	2056E8G0

**OPTIONAL**


QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472



RESTAURANT TABLE D'AMIS KORTRIJK | BELGIUM



**05**

3x QA60 max.53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

8.50kg IP20 0,9-D

	CODE
	2053E8S0
	2053E8G0


**OPTIONAL**

QA60 LED E27 6W


	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472

DESIGNED BY JULES WABBES

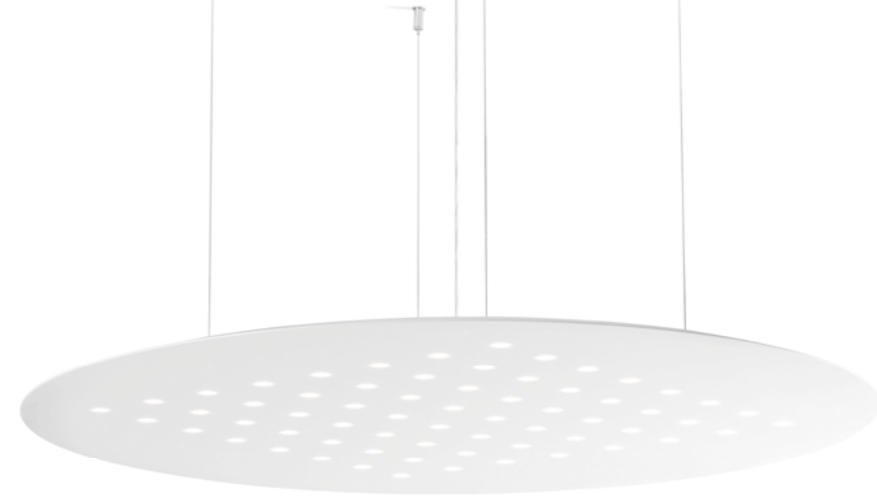

CORY  
CEILING SUSPENDED



6.6

LED 14W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
corian® glacier white | aluminium

5,75kg | IP20 | 0,3m

3000K | >85 CRI | 1820lm

CODE  
206174W4






VISUALISATION

# BEBOW

CEILING SUSPENDED

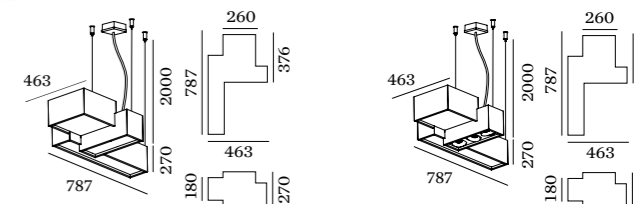

## 1.0

LED 35W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover | two circuits  
aluminium powder coated  
opal PMMA cover

6.30kg IP20  $\pm 0.3$

3000K | >80 CRI | 1820lm

	CODE
	132384W4
	132384B4

## 2.0

LED 55W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
opal cover + 3x spot | two circuits |  
aluminium powder coated  
opal PMMA cover

6.70kg IP20  $\pm 0.3$

3000K | >80 CRI | 3250lm

	CODE
	132364W4
	132364B4




DESIGNED BY S&R CORNELISSEN

WEVER & DUCRÉ 222 – 223



# BEBOW

CEILING SUSPENDED

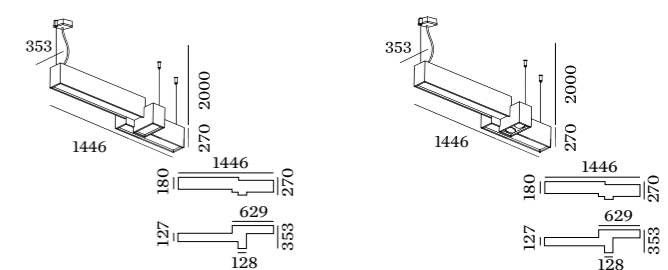

### 3.0

LED 35W | 220-240VAC | 50-60Hz  
 PCB 3-step | incl. PS | phase-cut dim  
 opal cover | two circuits  
 aluminium powder coated  
 opal PMMA cover

8.00kg IP20 ±0.3°

3000K | >80 CRI | 1910lm

	CODE
	132484W4
	132484B4

### 4.0

LED 48W | 220-240VAC | 50-60Hz  
 PCB 3-step | incl. PS | phase-cut dim  
 opal cover + 2x spot | two circuits  
 aluminium powder coated  
 opal PMMA cover

8.30kg IP20 ±0.3°

3000K | >80 CRI | 2850lm

	CODE
	132464W4
	132464B4





DESIGNED BY S&R CORNELISSEN



PRIVATE RESIDENCE BRUGGE | BELGIUM

# VENN

CEILING SUSPENDED

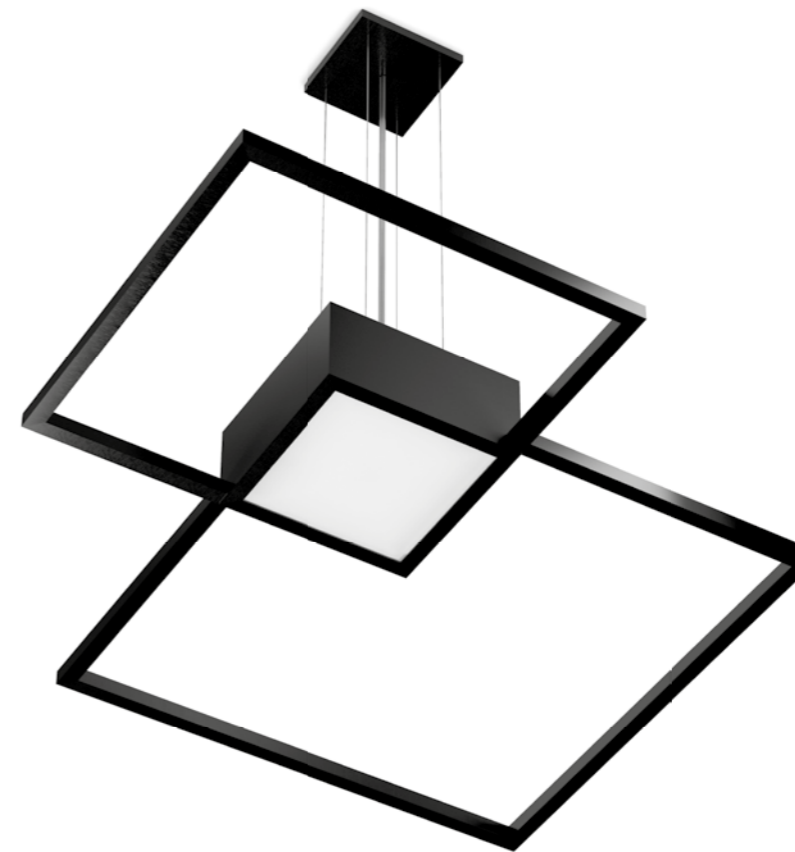

## 3.0

LED 47W | 220-240VAC | 50-60Hz  
 PCB 3-step | phase-cut dim  
 aluminium powder coated  
 opal PMMA cover

2.90kg | IP20 | 0.3-1 | P


3000K | >80 CRI | direct 400lm,  
 indirect 2500lm

CODE
149384W4
149384B4



# BISHOP

CEILING SUSPENDED




## 4.0

E27 max.25W | E27  
220-240VAC | 50-60Hz  
composite | aluminium lacquered

1.08kg IP20 0.9

CODE
2181E0W0
2181E0D0
2181E0K0




## 6.0

E27 max.25W | E27  
220-240VAC | 50-60Hz  
composite | aluminium lacquered

2.62kg IP20 0.9

CODE
2182E0W0
2182E0D0
2182E0K0



## 8.0

E27 max.25W | E27  
220-240VAC | 50-60Hz  
composite | aluminium lacquered

5.70kg IP20 0.9

CODE
2183E0W0
2183E0D0
2183E0K0

### OPTIONAL

QA60 LED E27 6W

CODE
2200K   400lm 9003E109
2700K   550lm 9003E125

G95 LED E27 9W

2200K   400lm 9003E111
------------------------

G95 LED E27 9W opal

2700K   806lm 9003E126
------------------------

more lamps and specs on page 472

### OPTIONAL

QA60 LED E27 6W

CODE
2200K   400lm 9003E109
2700K   550lm 9003E125

G95 LED E27 9W

2200K   400lm 9003E111
------------------------

G95 LED E27 9W opal

2700K   806lm 9003E126
------------------------

more lamps and specs on page 472

### OPTIONAL

QA60 LED E27 6W

CODE
2200K   400lm 9003E109
2700K   550lm 9003E125

G95 LED E27 9W

2200K   400lm 9003E111
------------------------

G95 LED E27 9W opal

2700K   806lm 9003E126
------------------------

more lamps and specs on page 472



reddot award 2015  
honourable mention



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design


DESIGNED BY 3HDRAFT





# ROCK COLLECTION

## CEILING SUSPENDED



**3.0**

E27 max.100W | E26-E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered

3-5kg IP20

370mm	CODE
	2201E8W0
	2201E8S0
	2201E8D0

560mm	CODE
	2203E8W0
	2203E8S0
	2203E8D0

740mm	CODE
	2205E8W0
	2205E8S0
	2205E8D0

### OPTIONAL


QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	
2200K   400lm	9003E111

G95 LED E27 9W opal	
2700K   806lm	9003E126

more lamps and specs on page 472



**4.0**

E27 max.100W | E26-E27  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered

3.5-5.5kg IP20

370mm	CODE
	2202E8W0
	2202E8S0
	2202E8D0

560mm	CODE
	2204E8W0
	2204E8S0
	2204E8D0

740mm	CODE
	2206E8W0
	2206E8S0
	2206E8D0

### OPTIONAL



QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	
2200K   400lm	9003E111

G95 LED E27 9W opal	
2700K   806lm	9003E126

more lamps and specs on page 472









# WIRO

CEILING SUSPENDED

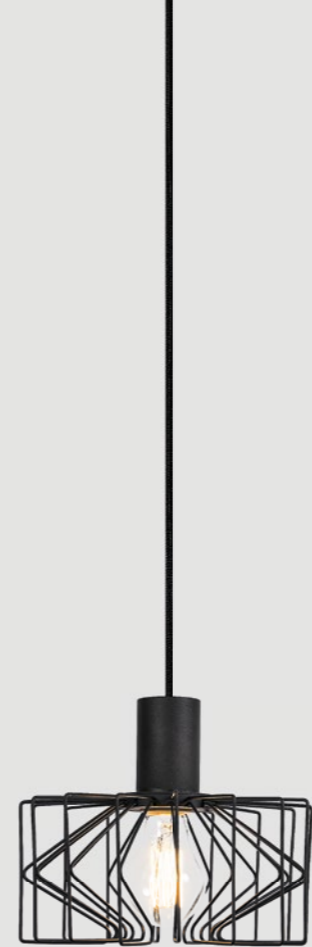

## 2.0

QA60 max.60W | E27  
220-240VAC | 50-60Hz  
varnished steel

0.53kg IP20 0,9-1

CODE

2096E0V0  
2096E0B0

## OPTIONAL

QA60 LED E27 6W

CODE

2200K | 400lm 9003E109  
2700K | 550lm 9003E125

T45-S carbon filament E27 15W

2200K | 50lm 9003E104

QA60 carbon filament E27 15W

2200K | 50lm 9003E101


more lamps and specs on page 472





# WIRO


## CEILING SUSPENDED



**1.8**

QA60 max.60W | E27  
220-240VAC | 50-60Hz  
varnished steel

1.24kg IP20



**3.8**

QA60 max.60W | E27  
220-240VAC | 50-60Hz  
varnished steel

2.40kg IP20

CODE

2092E0V0

2092E0B0

CODE

2093E0V0

2093E0B0

### OPTIONAL

QA60 LED E27 6W

CODE

2200K | 400lm

9003E109

2700K | 550lm

9003E125

T32-180 carbon filament E27 15W

2200K | 50lm

9003E106

QA60 carbon filament E27 15W

2200K | 50lm

9003E101

more lamps and specs on page 472

### OPTIONAL

QA60 LED E27 6W

CODE

2200K | 400lm

9003E109

2700K | 550lm

9003E125

T32-180 carbon filament E27 15W

2200K | 50lm

9003E106

QA60 carbon filament E27 15W

2200K | 50lm

9003E101


more lamps and specs on page 472



RESTAURANT LE NOIR BONNET | AIXOME ARCHITECTURE SIRAUT | BELGIUM



WIRO  
CEILING SUSPENDED



6.1

QA60 max.60W | E27  
220-240VAC | 50-60Hz  
varnished steel

2.72kg IP20 0-90°

	CODE
	2094E0V0
	2094E0B0

OPTIONAL

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

T32-300 carbon filament E27 15W  
2200K | 50lm 9003E107

ST64 carbon filament E27 15W  
2200K | 50lm 9003E105


more lamps and specs on page 472





# WIRO

CEILING SUSPENDED



6.5

QA60 max.60W | E27  
220-240VAC | 50-60Hz  
varnished steel

3.97kg IP20 0,9m

CODE

2095E0V0

2095E0B0

## OPTIONAL

QA60 LED E27 6W

CODE

2200K | 400lm

9003E109

2700K | 550lm

9003E125

T32-300 carbon filament E27 15W

2200K | 50lm

9003E107

G95 carbon filament E27 15W

2200K | 50lm

9003E102


more lamps and specs on page 472



VISUALISATION



ELLO  
CEILING SUSPENDED



13.0

LED 18W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.00kg IP20 0.3

3000K | >85 CRI | 940lm

CODE

500284W4  
500284B4



reddot award 2015  
winner



DESIGN  
AWARD  
2015



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design

DESIGNED BY S&R CORNELISSEN


WEVER & DUCRÉ 246 – 247



SHOWROOM KITCHEN DOVY ROESLARE | BELGIUM



LOUIS  
CEILING SUSPENDED



1.0

LED 55W | 220-240VAC | 50-60Hz  
PCB 3-step | dali switch dim | incl. PS  
opal LLDPE body | steel

13.26kg IP20 0.5

2700K | >85 CRI | 3300lm

CODE



211185W2



VISUALISATION

# MACBETH

CEILING SUSPENDED

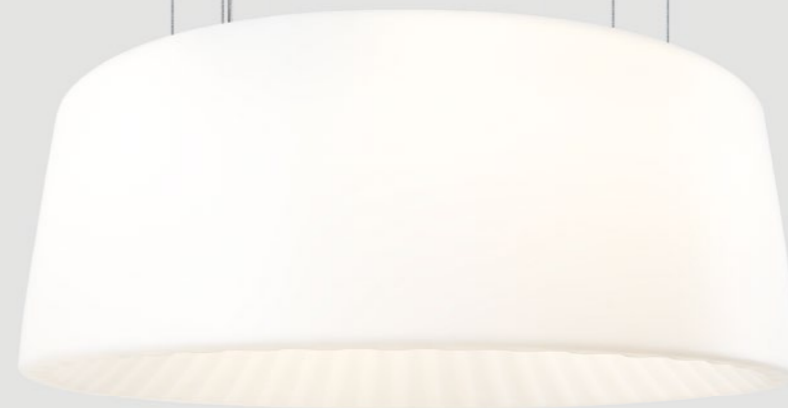

1.0

LED 42W | 220-240VAC | 50-60Hz  
PCB 3-step | dali switch dim  
opal LLDPE body | steel

13.40kg IP20 +0.5+ P

CODE

212185W

### Light Colour Selection

	LUMEN	CRI	CODE
3000K	4500	>85	4
4000K	4800	>85	6

### OPTIONAL

CODE

suspension  
set 4.0m 90015114


DESIGNED BY S&R CORNELISSEN

WEVER & DUCRÉ 250 - 251



# GIGANT

CEILING SUSPENDED



## 10.0

LED 42W | 220-240VAC | 50-60Hz  
PCB 3-step | dali switch dim  
opal LLDPE body | steel

8.80kg IP20  $\pm$ 0.3° P

CODE

213185W


### Light Colour Selection

	LUMEN   CRI	CODE
3000K	5000   >85	4
4000K	5300   >85	6

### OPTIONAL

CODE

suspension  
set 4.0m 90015114



## 16.0

LED 83W | 220-240VAC | 50-60Hz  
PCB 3-step | dali switch dim  
opal LLDPE body | steel

15.30kg IP20  $\pm$ 0.3° P

CODE

213285W

### Light Colour Selection

	LUMEN   CRI	CODE
3000K	9900   >85	4
4000K	10400   >85	6

### OPTIONAL

CODE

suspension  
set 4.0m 90015114





RESTAURANT KOGO POLPO PRAGUE | CZECH REPUBLIC



OFFICE | DENTSU AEGIS NETWORK | TRZOP ARCHITEKCI WARSAW | POLAND







INFECTED CONCEPT STORE GRAZ | AUSTRIA

# CYCLONE

CEILING SUSPENDED

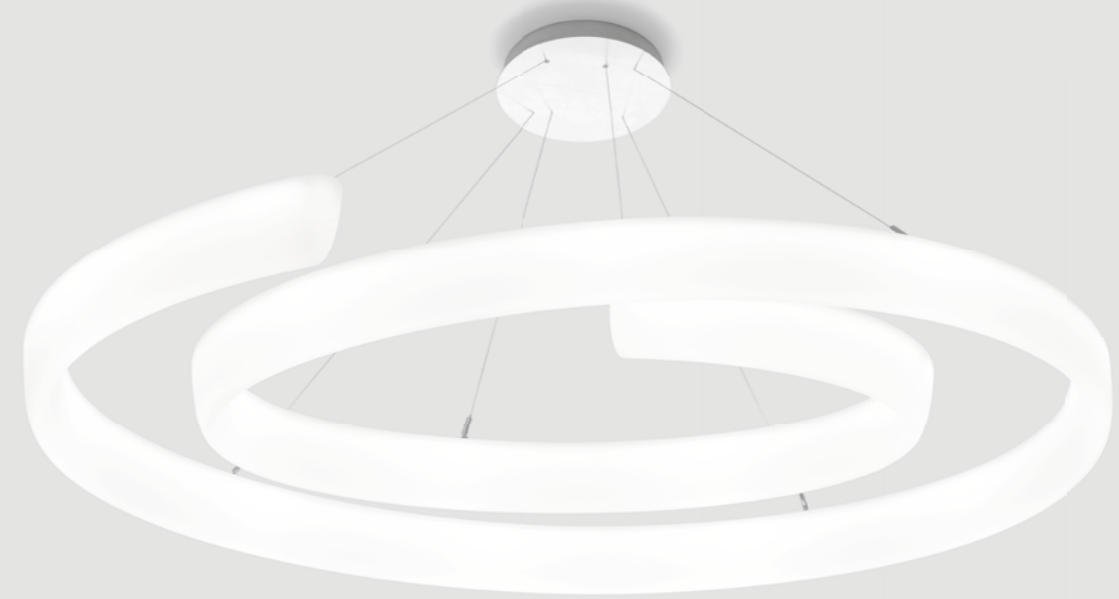

## 17.0

LED 70W | 220-240VAC  
50-60Hz | PCB 3-step | dali dim  
aluminium powder coated  
opal LLDPE body

8.80kg IP20  $\pm 0.3^\circ$

3000K | >80 CRI | 7000lm



CODE

219185W4



# SMILE IN

## WALL RECESSED



### 1.0

LED 4/6W | 350-500mA | 9Vf  
COB 2-step | excl. power supply  
aluminium powder coated  
brushed

0.39kg IP20 0,3-1

86 40 4-40

3000K | >80 CRI | 280-370lm

	CODE
	326151W4
	702151L4

### ALWAYS USE

power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012030

### 2.0

LED 4/6W | 350-500mA | 9Vf  
COB 2-step | excl. power supply  
aluminium powder coated  
brushed

0.42kg IP20 0,3-1

86 40 4-40

3000K | >80 CRI | 280-370lm

	CODE
	326251W4
	703151L4

### ALWAYS USE


power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468



### OPTIONAL

	CODE
recessed housing	90012030



# LITO

WALL RECESSED



## 1.0

LED 2/3W | 350-500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3-1

70x70 35 2-18

3000K | >85 CRI | 188-260lm

	CODE
	145181W4
	145181A4
	145181B4

## ALWAYS USE

power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468

## OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

## 2.0

LED 2/3W | 350-500mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
anodised

0.09kg IP20 0.3-1

70x70 35 2-18

3000K | >85 CRI | 188-260lm

	CODE
	145281W4
	145281A4
	145281B4

## ALWAYS USE

power supply

	CODE
350mA   6W	90213202
500mA   6W	90214201

more power supplies on page 468




## OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119



# EYE

WALL RECESSED

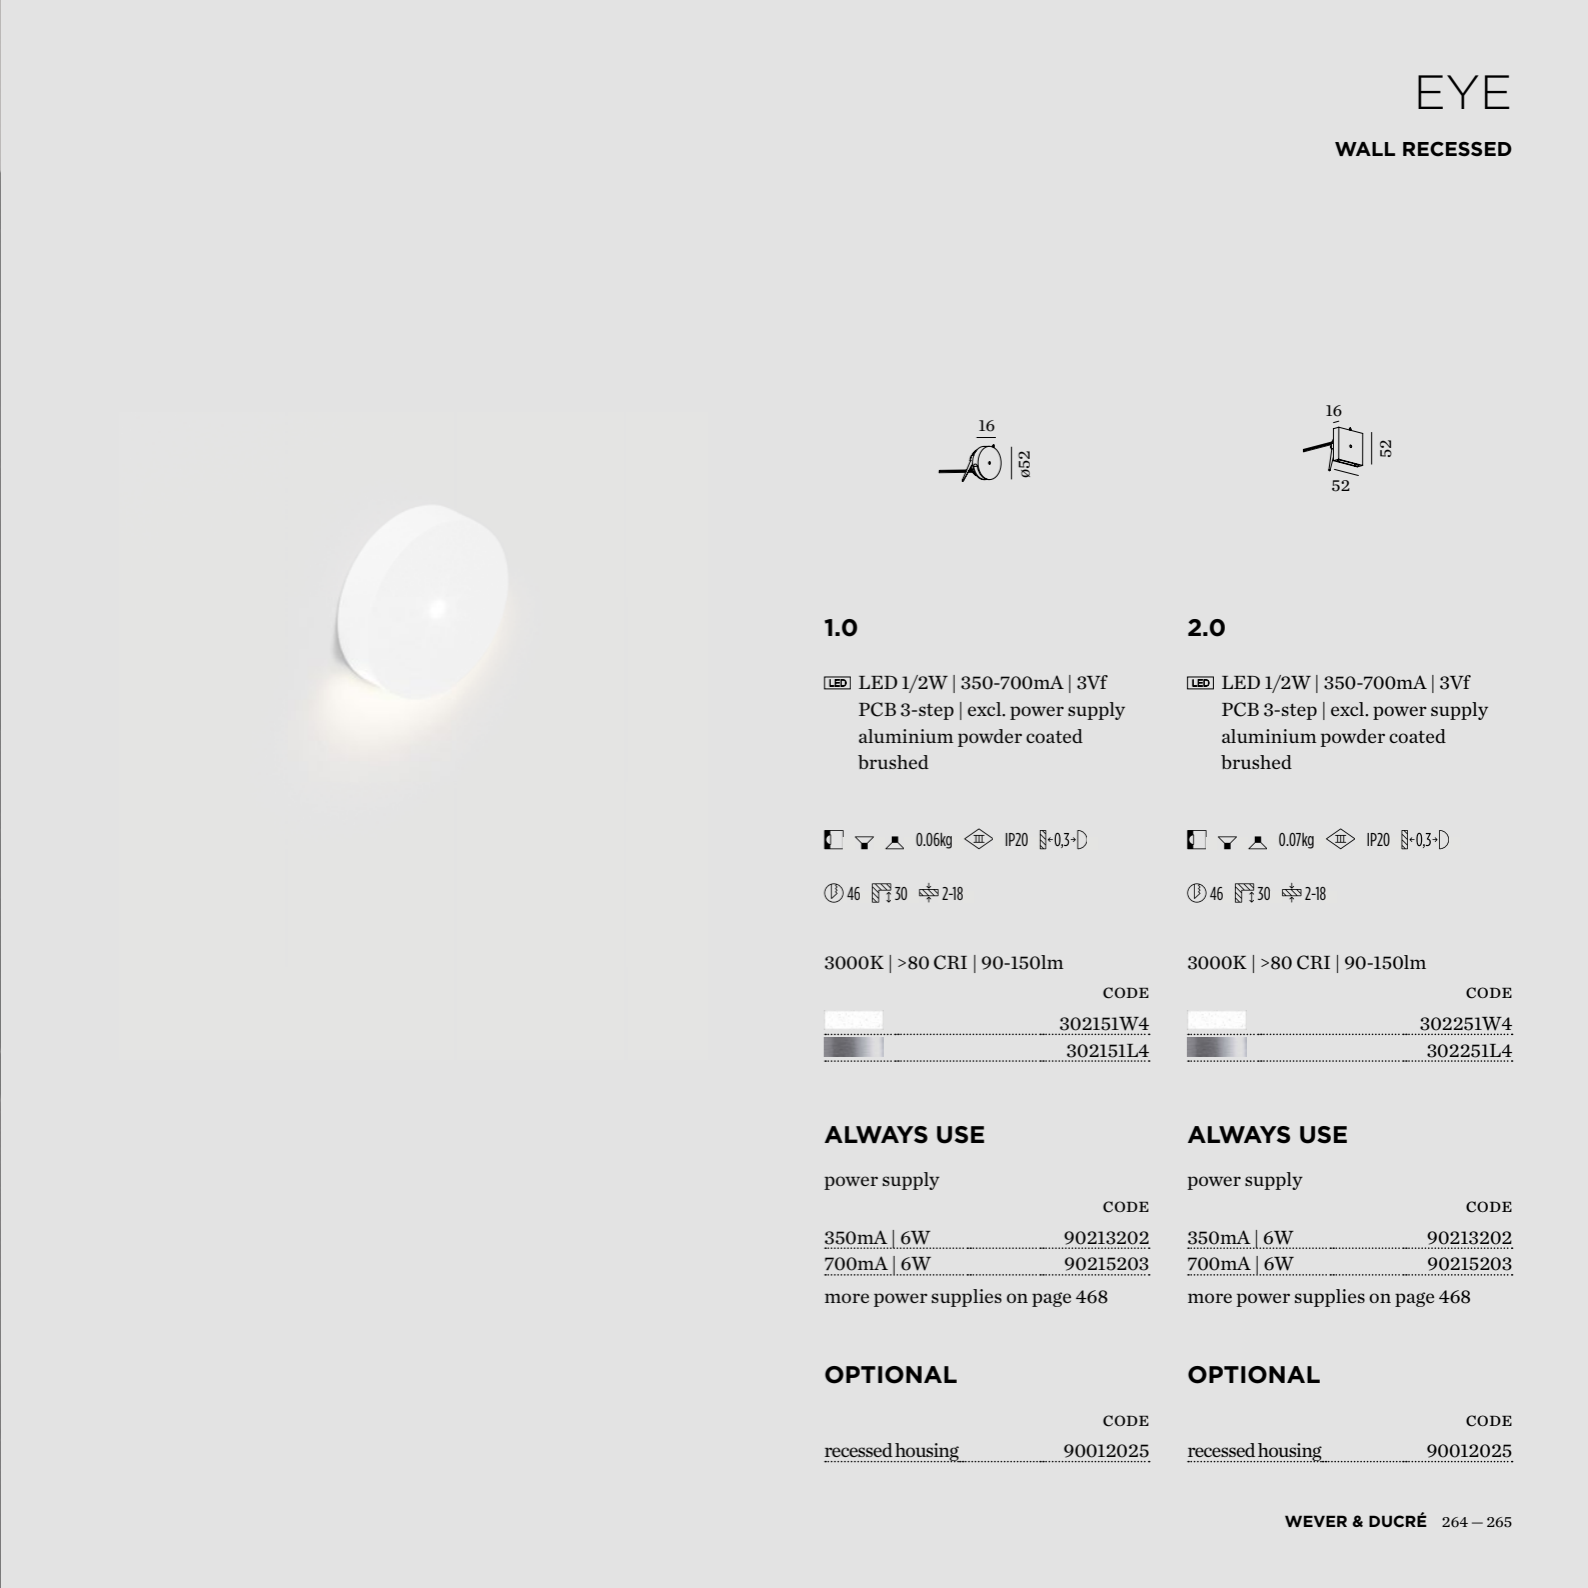

## 1.0

LED 1/2W | 350-700mA | 3Vf  
 PCB 3-step | excl. power supply  
 aluminium powder coated  
 brushed

0.06kg IP20

46 30 2-18

3000K | >80 CRI | 90-150lm

	CODE
	302151W4
	302151L4

## ALWAYS USE

power supply

	CODE
350mA   6W	90213202
700mA   6W	90215203

more power supplies on page 468

## OPTIONAL

	CODE
recessed housing	90012025

## 2.0

LED 1/2W | 350-700mA | 3Vf  
 PCB 3-step | excl. power supply  
 aluminium powder coated  
 brushed

0.07kg IP20

46 30 2-18

3000K | >80 CRI | 90-150lm

	CODE
	302251W4
	302251L4

## ALWAYS USE

power supply

	CODE
350mA   6W	90213202
700mA   6W	90215203

more power supplies on page 468

## OPTIONAL

	CODE
recessed housing	90012025




VISUALISATION



# THEMIS

## WALL RECESSED



### 1.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.24kg IP20

70x158 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303271W4
	303271S4
	303271K4

### ALWAYS USE


power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012032
plasterkit	90017111



### 2.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.31kg IP20

70x258 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303371W4
	303371S4
	303371K4

### ALWAYS USE


power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012033
plasterkit	90017112



### 5.0

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.45kg IP20

70x458 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303671W4
	303671S4

### ALWAYS USE

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



### OPTIONAL

	CODE
recessed housing	90012036
plasterkit	90017115



# THEMIS CARRÉ

WALL RECESSED

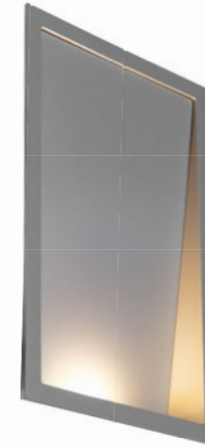

## 0.8

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.15kg IP20  $\varnothing$ -0.3-16

170x75 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303171W4
	303171S4
	303171K4

### ALWAYS USE


power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012031
plasterkit	90017110



## 1.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.41kg IP20  $\varnothing$ -0.3-16

160x165 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303471W4
	303471S4
	303471K4

### ALWAYS USE


power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012034
plasterkit	90017113



## 2.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.55kg IP20  $\varnothing$ -0.3-16

160x265 50 2-18

3000K | >80 CRI | 280-340lm

	CODE
	303571W4
	303571S4
	303571K4

### ALWAYS USE

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	90012035
plasterkit	90017114




# STRANGE

WALL RECESSED



VISUALISATION



## 1.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.24kg IP20  $\pm 0.3^\circ$   $\text{TC}$

170x86 55 2-25

3000K | >80 CRI | 280-340lm


	CODE
	304271W4
	304271S4

### ALWAYS USE

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



## 2.7

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.31kg IP20  $\pm 0.3^\circ$   $\text{TC}$

270x86 55 2-25

3000K | >80 CRI | 280-340lm


	CODE
	304371W4
	304371S4

### ALWAYS USE

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



## 5.0

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.45kg IP20  $\pm 0.3^\circ$   $\text{TC}$

470x86 55 2-25

3000K | >80 CRI | 280-340lm

	CODE
	304671W4
	304671S4

### ALWAYS USE

power supply


	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



# STRANGE CARRÉ

WALL RECESSED



**0.8**

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.15kg IP20 0.3-10

180x86 55 2-25

3000K | >80 CRI | 280-340lm


	CODE
	304171W4
	304171S4

**ALWAYS USE**

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



**1.7**

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.41kg IP20 0.3-10

170x176 55 2-25

3000K | >80 CRI | 280-340lm


	CODE
	304471W4
	304471S4

**ALWAYS USE**

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



**2.7**

LED 4/6W | 500-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated  
lacquered

0.55kg IP20 0.3-10

270x176 55 2-25

3000K | >80 CRI | 280-340lm

	CODE
	304571W4
	304571S4

**ALWAYS USE**

power supply

	CODE
500mA   6W	90214201
700mA   6W	90215203

more power supplies on page 468



# STRIPE

## WALL RECESSED



### 0.4

LED 1/2W | 350-700mA | 3Vf  
 PCB 3-step | excl. power supply  
 aluminium powder coated  
 brushed

0.09kg IP20

25x56 40 2-18

3000K | >80 CRI | 90-150lm

	CODE
White	305151W4
Grey	305151L4
Black	305151B4


### ALWAYS USE

	CODE
power supply	
350mA   6W	90213202
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	
plasterkit	90012037



### 0.7

LED 1/2W | 350-700mA | 3Vf  
 PCB 3-step | excl. power supply  
 aluminium powder coated  
 brushed

0.10kg IP20

25x56 40 2-18

3000K | >80 CRI | 90-150lm

	CODE
White	305251W4
Grey	305251L4
Black	305251B4


### ALWAYS USE

	CODE
power supply	
350mA   6W	90213202
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL

	CODE
recessed housing	
plasterkit	90012037



### 2.2

LED 1/2W | 350-700mA | 3Vf  
 PCB 3-step | excl. power supply  
 aluminium powder coated  
 brushed

0.27kg IP20

25x205 40 2-18

3000K | >80 CRI | 90-150lm

	CODE
White	305351W4
Grey	305351L4
Black	305351B4

### ALWAYS USE

	CODE
power supply	
350mA   6W	90213202
700mA   6W	90215203

more power supplies on page 468

### OPTIONAL


	CODE
recessed housing	
plasterkit	90012038







ORIS  
WALL RECESSED



**0.7**

LED 1/2W | 350-700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.28kg IP20

47x182 40 4-40

3000K | >80 CRI | 90-150lm

CODE  
327161W4

**ALWAYS USE**


power supply

CODE  
500mA | 6W 90214201  
700mA | 6W 90215203

more power supplies on page 468

**OPTIONAL**

CODE  
recessed housing 90012039  
plasterkit  
concrete housing 90012044



**1.3**

LED 2/4W | 350-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP20

112x117 40 4-40

3000K | >80 CRI | 180-300lm

CODE  
327261W4

**ALWAYS USE**


power supply

CODE  
500mA | 6W 90214201  
700mA | 6W 90215203

more power supplies on page 468

**OPTIONAL**

CODE  
recessed housing 90012041  
plasterkit  
concrete housing 90012040



**2.0**

LED 2/4W | 350-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.42kg IP20

112x185 40 4-40

3000K | >80 CRI | 180-300lm

CODE  
327361W4

**ALWAYS USE**

power supply

CODE  
500mA | 6W 90214201  
700mA | 6W 90215203

more power supplies on page 468

**OPTIONAL**


CODE  
recessed housing 90012043  
plasterkit  
concrete housing 90012042



VISUALISATION

# SMILE ON

WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated  
brushed

0.43kg IP65

3000K | >80 CRI | 370lm

CODE  
702253W4  
702253L4

## 2.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated  
brushed

0.65kg IP65




3000K | >80 CRI | 370lm

CODE  
703253W4  
703253L4



# SMILE

WALL SURFACE

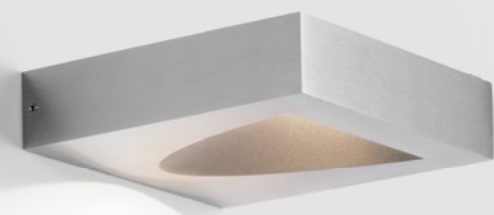

## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.02kg IP65

3000K | >80 CRI | 480lm

CODE

703354W4  
703354L4

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.87kg IP65

3000K | >80 CRI | 480lm

CODE


703454W4  
703454L4

# LIGHTDROP

WALL SURFACE



VISUALISATION



**1.2**

QT14 max.40W | G9  
220-240VAC | 50-60Hz  
powder coated | chrome plated

0.41kg IP44 0.9m

CODE


3071V0W0  
3071V0C0

**OPTIONAL**

QT14 LED 3W

CODE

2700K | 200lm 9019G705



**1.8**

QT14 max.40W | G9  
220-240VAC | 50-60Hz  
powder coated | chrome plated

0.64kg IP44 0.9m

CODE

3072V0W0  
3072V0C0

**OPTIONAL**

QT14 LED 3W

CODE

2700K | 200lm 9019G705

DESIGNED BY STUDIO MANGO






VISUALISATION

MOON

WALL SURFACE



**1.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.57kg | IP20 | 0.3 | P

3000K | >80 CRI | 480lm



CODE  
308174W4  
308174L4



VISUALISATION

# CENTRAL

WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.00kg IP20 3~0.3~D 6

3000K | >80 CRI | 480lm

CODE

313374W4

313174L4

## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.94kg IP20 3~0.3~D 6

3000K | >80 CRI | 2x290lm

CODE




313474W4

313274L4



# STATION

WALL SURFACE

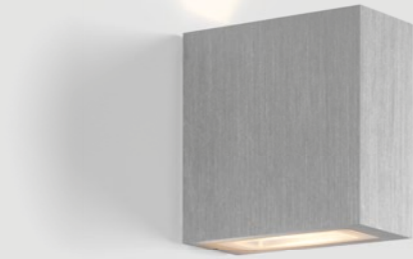

## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.88kg IP20

3000K | >80 CRI | 480lm

CODE

314374W4

314174L4

## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.80kg IP20

3000K | >80 CRI | 2x290lm

CODE

314474W4



314274L4



PRIVATE RESIDENCE BRUGGE | BELGIUM

# METRO

WALL SURFACE

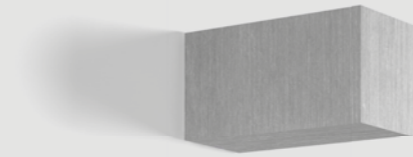


## 1.0

LED 8W | 220-240VAC | 50-60Hz  
 COB 2-step | incl. PS | phase-cut dim  
 aluminium powder coated  
 brushed  
 asymmetric reflector

0.88kg | IP20 | 0.3m

3000K | >80 CRI | 500lm




CODE  
 315174W4  
 315174L4





# BENTO

WALL SURFACE

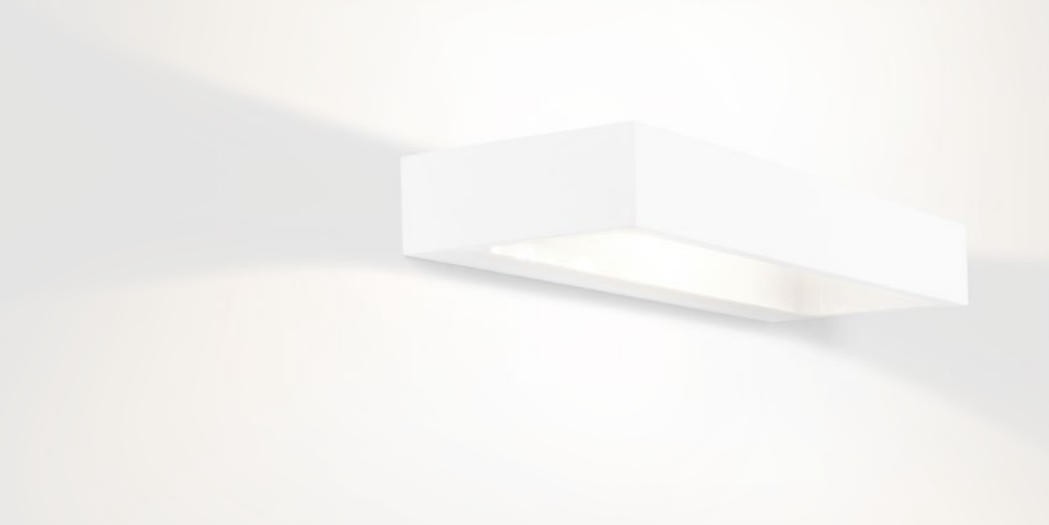

## 1.3

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.74kg IP20 0.3m

3000K | >80 CRI | 480lm

CODE  
309274W4  
309274B4

## 3.6

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated



1.48kg IP20 0.3m

3000K | >80 CRI | 480lm

CODE  
309374W4  
309374B4

# LEENS

WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.1kg ⊕ IP20 ⌀=0,3+D ⑥

3000K | >80 CRI | 480lm

	CODE
	311174W4
	311174L4
	311174B4

## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.90kg ⊕ IP20 ⌀=0,3+D ⑥



3000K | >80 CRI | 2x240lm

	CODE
	311274W4
	311274L4
	311274B4



# BENTA

WALL SURFACE



## 1.3

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.73kg | IP20 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

310174W4

310174B4

## 3.6

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


1.25kg | IP20 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

310274W4

310274B4




**1.5**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.49kg IP20  $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312164W4
	312164L4
	312164B4




**2.6**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.40kg IP20  $\pm 0.3^\circ$

3000K | >80 CRI | 480lm

	CODE
	312264W4
	312264L4
	312264B4



**5.4**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.65kg IP20  $\pm 0.3^\circ$


3000K | >80 CRI | 480lm

	CODE
	312364W4
	312364L4
	312364B4





ARZY  
WALL SURFACE



1.0

LED 6W | 110-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel powder coated  
chrome

1.56kg | IP20 | ±0,3 | ©

3000K | >80 CRI | 380lm

CODE

	325163W4
	325163C4
	325163B4



reddot design award  
winner 2010


DESIGNED BY FRANK JANSSENS

VISUALISATION



WAHAA

WALL SURFACE



### 1.0

2xLED 6W | 110-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated

2.10kg ⊕ IP20 ⚡-0.3-

3000K | >80 CRI | 2x480lm

CODE




324173W4

324173B4



# VENN

## WALL SURFACE

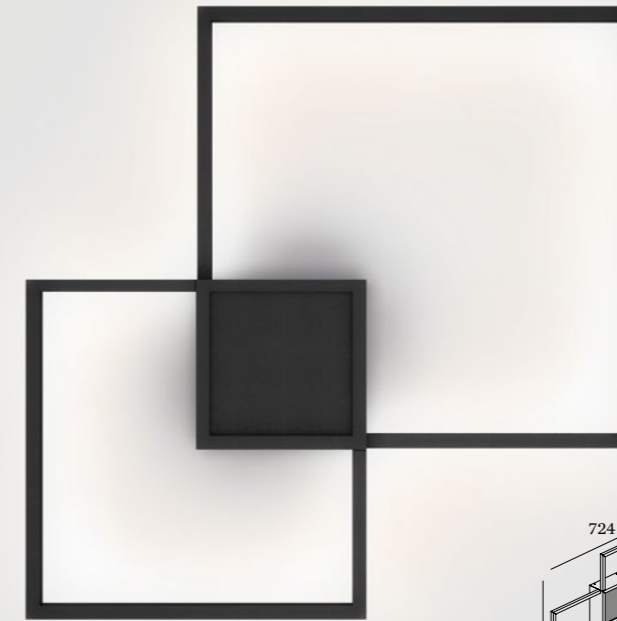

### 1.0

LED 30W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.50kg IP20  $\pm$ 0.3° P

3000K | >80 CRI | indirect 2500lm

CODE  
149184W4  
149184B4

### 2.0

LED 47W | 220-240VAC | 50-60Hz  
PCB 3-step | phase-cut dim  
aluminium powder coated  
opal PMMA cover

2.50kg IP20  $\pm$ 0.3° P

3000K | >80 CRI | direct 400lm  
indirect 2500lm

CODE  
149284W4  
149284B4



As awarded by The Chicago Athenaeum:  
Museum of Architecture and Design







PRIVATE RESIDENCE DUINBERGEN | BELGIUM

# TRAIN

WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated  
brushed

0.24kg IP20

3000K | >80 CRI | 420lm

CODE

719463W4

719163L4

## 2.0

2xLED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated  
brushed

0.35kg IP20

3000K | >80 CRI | 2x290lm

CODE


719563W4

719263L4



# BOX mini

WALL SURFACE



## 1.0

PAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.24kg IP20

## 2.0

2xPAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.44kg IP20

	CODE
	300120W0
	300120L0
	300120P0
	300120B0

	CODE
	301120W0
	301120L0
	301120P0
	301120B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# BOX

## WALL SURFACE



### 1.0 LED


LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.60kg IP20  $\pm 0.3^\circ$

	CODE
	321164W
	321164L
	321164G
	321164Q
	321164P
	321164B

#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	315   >80	1
2700K	420   >80	2
3000K	420   >80	4



### 1.0 QT14

QT14 max.75W | G9  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.66kg IP20  $\pm 0.9^\circ$

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0Q0
	3211G0P0
	3211G0B0


#### OPTIONAL

QT14 LED 3W

	CODE
3000K   300lm	9019G704

flaps for adjustable beam angle

	CODE
	900401W0



### 2.0 LED

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.67kg IP20  $\pm 0.3^\circ$

	CODE
	321144W
	321144L
	321144G
	321144Q
	321144P
	321144B


#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	2x315   >80	1
2700K	2x340   >80	2
3000K	2x340   >80	4

#### OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0



### 3.0 LED

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.86kg IP20  $\pm 0.3^\circ$

	CODE
	321244W
	321244L
	321244G
	321244Q
	321244P
	321244B

#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	2x315   >80	1
2700K	2x340   >80	2
3000K	2x340   >80	4

#### OPTIONAL


flaps for adjustable beam angle

	CODE
	900401W0



# RAY mini

WALL SURFACE



## 1.0

PAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.21kg IP20

	CODE
	300220W0
	300220L0
	300220P0
	300220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## 2.0

2xPAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.36kg IP20

	CODE
	301220W0
	301220L0
	301220P0
	301220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9


more lamps and specs on page 471





# RAY

## WALL SURFACE



### 1.0 LED


LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.68kg IP20 ±0.3°

	CODE
	322164W
	322164L
	322164G
	322164Q
	322164P
	322164B

#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	315   >80	1
2700K	420   >80	2
3000K	420   >80	4



### 1.0 QT14

QT14 max.75W | G9  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.62kg IP20 ±0.9°

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0Q0
	3221G0P0
	3221G0B0


#### OPTIONAL

QT14 LED 3W

	CODE
3000K   300lm	9019G704

flaps for adjustable beam angle

	CODE
	900401W0



### 2.0 LED

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.69kg IP20 ±0.3°

	CODE
	322144W
	322144L
	322144G
	322144Q
	322144P
	322144B


#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	2x315   >80	1
2700K	2x340   >80	2
3000K	2x340   >80	4

#### OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0



### 3.0 LED

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.91kg IP20 ±0.3°

	CODE
	322244W
	322244L
	322244G
	322244Q
	322244P
	322244B

#### Light Colour Selection

	LUMEN   CRI	CODE
2200K	2x315   >80	1
2700K	2x340   >80	2
3000K	2x340   >80	4

#### OPTIONAL



flaps for adjustable beam angle

	CODE
	900401W0



# DOCUS mini

WALL SURFACE



## 1.0

PAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.24kg IP20

	CODE
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## 2.0

2xPAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.43kg IP20

	CODE
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# HEXO mini

WALL SURFACE



## 1.0

PAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.23kg IP20

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim





	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471

## 2.0

2xPAR16 max.15W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated  
brushed

0.40kg IP20

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim


	CODE
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 471



# MILES

## WALL SURFACE




### 2.0 CARRÉ

LED 8W | 100-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.03kg IP20 0.3m

3000K | >80 CRI | 420lm

	CODE
	317474W4
	317474G4
	317474Q4
	317474P4
	317474B4




### 2.0 ROUND

LED 8W | 100-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

0.77kg IP20 0.3m

3000K | >80 CRI | 420lm

	CODE
	317574W4
	317574G4
	317574Q4
	317574P4
	317574B4




### 3.0 CARRÉ

LED 8W | 100-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.63kg IP20 0.3m

3000K | >80 CRI | 420lm

	CODE
	317674W4
	317674G4
	317674Q4
	317674P4
	317674B4



### 3.0 ROUND

LED 8W | 100-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
brushed

1.09kg IP20 0.3m



3000K | >80 CRI | 420lm

	CODE
	317774W4
	317774G4
	317774Q4
	317774P4
	317774B4



# MILES

WALL SURFACE



## 9.0

LED 30W | 220-240VAC | 50-60Hz  
 COB 3-step | incl. PS | phase-cut dim  
 aluminium powder coated  
 brushed

1.41kg IP20

3000K | >80 CRI | 690lm

	CODE
	317274W4
	317274L4
	317274B4

## 12.0

LED 40W | 220-240VAC | 50-60Hz  
 COB 3-step | incl. PS | phase-cut dim  
 aluminium powder coated  
 brushed

2.10kg IP20

3000K | >80 CRI | 920lm


	CODE
	317374W4
	317374L4
	317374B4



VISUALISATION

# YARD

WALL SURFACE



## 10.0

⇒ T16 14W | G5  
 220-240VAC | 50-60Hz  
 aluminium powder coated



☑ 1.57kg ⊕ IP20 ⚡-0,5-Ⓟ

	CODE
	3181T3W0
	3181T3S0




# ROCK COLLECTION

WALL SURFACE

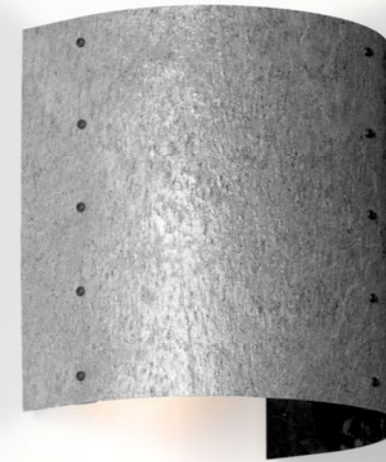

## 5.0

 E27 max.100W  
 220-240VAC | 50-60Hz  
 stone veneer | MDF lacquered

 2.00kg  IP20  0-10V

CODE	
	2231E8W0
	2231E8S0
	2231E8D0

## OPTIONAL

QA60 LED E27 6W		CODE
2200K   400lm		9003E109
2700K   550lm		9003E125



G95 LED E27 9W		
2200K   400lm		9003E111

G95 LED E27 9W opal		
2700K   806lm		9003E126

more lamps and specs on page 472



J.J.W.  
WALL SURFACE

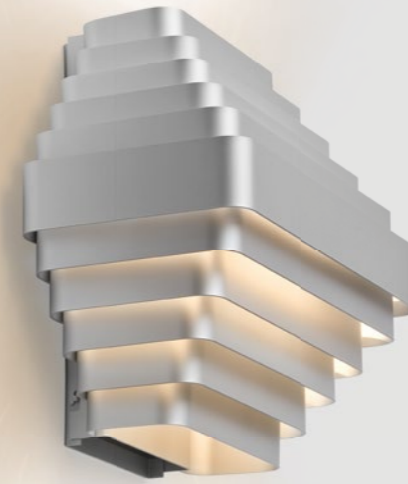

**01**

2x QA60 max.53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

2.92kg IP20 0,9m

	CODE
	2054E8S0
	2054E8G0



**OPTIONAL**

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472



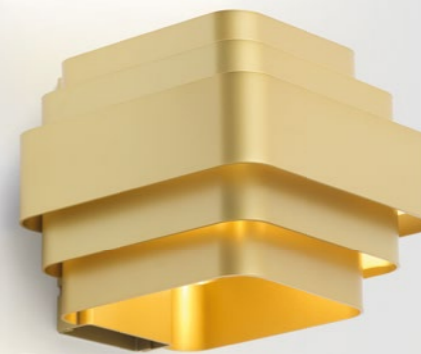

**02**

QA60 max.53W | E27  
220-240VAC | 50-60Hz  
aluminium lacquered

1.02kg IP20 0,9-D

	CODE
	2055E8S0
	2055E8G0

**OPTIONAL**

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

more lamps and specs on page 472



# ROCK COLLECTION

## FLOOR SURFACE



### 6.0

E27 max.100W  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered

6.00kg IP20 0.9m

	CODE
	2221E8W0
	2221E8S0
	2221E8D0

### OPTIONAL


QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	
2200K   400lm	9003E111

G95 LED E27 9W opal	
2700K   806lm	9003E126

more lamps and specs on page 472



### 7.0

E27 max.100W  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered

7.00kg IP20 0.9m

	CODE
	2222E8W0
	2222E8S0
	2222E8D0

### OPTIONAL


QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	
2200K   400lm	9003E111

G95 LED E27 9W opal	
2700K   806lm	9003E126

more lamps and specs on page 472



### 8.0

E27 max.100W  
220-240VAC | 50-60Hz  
stone veneer | MDF lacquered

3.50kg IP20 0.9m

	CODE
	2241E8W0
	2241E8S0
	2241E8D0

### OPTIONAL

QA60 LED E27 6W

	CODE
2200K   400lm	9003E109
2700K   550lm	9003E125

G95 LED E27 9W	
2200K   400lm	9003E111

G95 LED E27 9W opal	
2700K   806lm	9003E126

more lamps and specs on page 472






PRIVATE RESIDENCE GRAZ | AUSTRIA

# ROCK COLLECTION

FLOOR SURFACE



## 1.0 NAKED

E27 max.100W | E26-E27  
110-220VAC | 50-60Hz  
MDF lacquered

5.00kg IP20 0.9m

CODE  
2223E800

## OPTIONAL

T32-300 carbon filament E27 15W  
CODE  
2200K | 50lm 9003E107  
more lamps and specs on page 472

DESIGNED BY 13&9

# ROCK COLLECTION

FLOOR SURFACE



## 1.0

cross milled | MDF lacquered

370 mm      CODE  
      2247E8B0

560 mm      CODE  
      2248E8B0

740 mm      CODE  
      2249E8B0

## 2.0

cross milled | MDF lacquered

370 mm      CODE  
      2250E8B0

560 mm      CODE  
      2251E8B0

740 mm      CODE  
      2252E8B0

## 3.0

flat top | MDF lacquered

370 mm      CODE  
      2243E8B0

560 mm      CODE  
      2241E8B0

740 mm      CODE  
      2242E8B0

## 4.0

flat top | MDF lacquered

370 mm      CODE  
      2244E8B0





















560 mm      CODE  
      2245E8B0

740 mm      CODE  
      2246E8B0

**EXTERIOR**

# EXTERIOR

<b>CEILING RECESSED</b>								
p. 351	<b>INTRA</b> p. 351							
<b>CEILING SURFACE</b>								
p. 353 – 361	<b>BOX</b> p. 353	<b>RAY</b> p. 357	<b>TUBE CEILING</b> p. 359	<b>ROB</b> p. 361				
<b>WALL RECESSED</b>								
p. 363 – 369	<b>SMILE IN</b> p. 363	<b>ORIS</b> p. 365	<b>ATIM</b> p. 367					
<b>WALL SURFACE</b>								
p. 371 – 415	<b>SMILE ON</b> p. 371	<b>TUBE</b> p. 373	<b>TUBE CARRÉ</b> p. 377	<b>STAR</b> p. 383	<b>GETTON</b> p. 385	<b>SMILE</b> p. 387	<b>CENTRAL</b> p. 389	<b>STATION</b> p. 391
								
<b>TRAIN</b> p. 395	<b>TAPE</b> p. 401	<b>BOX</b> p. 403	<b>RAY</b> p. 407	<b>BOXX</b> p. 409	<b>PALOS</b> p. 411	<b>X-BEAM</b> p. 415		


<b>FLOOR RECESSED</b>								
p. 417 – 425	<b>CARD</b> p. 417	<b>MAP</b> p. 419	<b>FLIP</b> p. 421	<b>CHART</b> p. 423	<b>CHIP</b> p. 425			
<b>FLOOR SURFACE</b>								
p. 427 – 451	<b>FIFTY FIFTY</b> p. 427	<b>SMILE</b> p. 429	<b>SWAY</b> p. 431	<b>PALOS</b> p. 433	<b>EDGE</b> p. 437	<b>TAPE</b> p. 439	<b>PACE</b> p. 441	<b>LINUS</b> p. 443
								
	<b>GETTON</b> p. 445	<b>PALLUZ</b> p. 447	<b>POLAR</b> p. 451					
<b>FLOOR PROJECTOR</b>								
p. 453 – 457	<b>STAKE</b> p. 453	<b>X-BEAM</b> p. 457						
<b>FLOOR SCULPTURE</b>								
p. 459 – 461	<b>J.M.</b> p. 459	<b>ALICE</b> p. 461						





# INTRA

**EXTERIOR  
CEILING RECESSED**




## 1.0

LED 6W | 220-240VAC  
COB 3-step | incl. power supply  
aluminium | stainless steel  
opal glass | polyamide

0.15kg IP65 0.3m 36°

88 50 2-25

3000K | >80 CRI | 410lm


	CODE
	733168W4
	733168I4
	733168D4

## OPTIONAL

	CODE
recessed housing	90012026
plasterkit	90017101



BOX  
EXTERIOR  
CEILING SURFACE



OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211B1

1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.67kg | IP65 | 0.3-D | A 36°

3000K | >80 CRI | 480lm

	CODE
	735164W_
	735164D_
	735164B_

Light Colour Selection

	LUMEN	CRI	CODE
3000K	480	>80	4
1800-2850K	410	>90	9



inner cover

	CODE
	911011W1
	911011D1
	911011B1








VISUALISATION

RAY  
EXTERIOR  
CEILING SURFACE



1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.63kg | IP65 | 0.3°D | 36°

3000K | >80 CRI | 480lm

CODE	735364W_
	735364D_
	735364B_

Light Colour Selection

LUMEN   CRI	CODE
3000K 480   >80	4
1800-2850K 410   >90	9

OPTIONAL

inner cover

CODE	911041W1
	911041D1
	911041B1






PRIVATE RESIDENCE GRAZ | AUSTRIA

# TUBE CEILING

EXTERIOR  
CEILING SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.53kg IP65 0.3m 38°

3000K | >80 CRI | 480lm

	CODE
	734164W4
	734164D4
	734164B4

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.60kg IP65 0.9m

	CODE
	734120W0
	734120D0
	734120B0

## OPTIONAL


PAR16 LED GU10 6W  
phase-cut dim

	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 471



ROB  
EXTERIOR  
CEILING SURFACE



**1.6**

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

0.80kg IP44

3000K | >80 CRI | 600lm

CODE  
701183W4  
701183S4

**2.6**

LED 12W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

1.30kg IP44

3000K | >80 CRI | 1000lm

CODE  
701283W4  
701283S4

**3.5**

LED 20W | 220-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated  
opal PMMA cover

2.00kg IP44

3000K | >80 CRI | 1600lm



CODE  
701383W4  
701383S4



VISUALISATION

# SMILE IN

**EXTERIOR  
WALL RECESSED**



## 1.0

LED 4/6W | 350-500mA | 9Vf  
COB 2-step | excl. power supply  
aluminium powder coated

0.39kg IP65 0.3

86 40 4-40

3000K | >80 CRI | 280-370lm

CODE  
702151D4

### ALWAYS USE

power supply IP67

CODE  
350mA | 7W 90213301  
500mA | 7W 90214301

more power supplies on page 468

### OPTIONAL

CODE  
recessed housing 90012030

## 2.0

LED 4/6W | 350-500mA | 9Vf  
COB 2-step | excl. power supply  
aluminium powder coated

0.42kg IP65 0.3

86 40 4-40

3000K | >80 CRI | 280-370lm

CODE  
703151D4

### ALWAYS USE

power supply IP67

CODE  
350mA | 7W 90213301  
500mA | 7W 90214301

more power supplies on page 468


### OPTIONAL

CODE  
recessed housing 90012030





ORIS  
EXTERIOR  
WALL RECESSED



**0.7**

LED 1/2W | 350-700mA | 3Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.28kg IP65

47x182 40 4-40

3000K | >80 CRI | 90-150lm

	CODE
White	709161W4
Black	709161D4

**ALWAYS USE**


power supply IP66

	CODE
350mA   3W	90213101
700mA   3W	90215101

more power supplies on page 468

**OPTIONAL**

	CODE
recessed housing plasterkit	90012039
concrete housing	90012044



**1.3**

LED 2/4W | 350-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.34kg IP65

112x117 40 4-40

3000K | >80 CRI | 180-300lm

	CODE
White	709261W4
Black	709261D4

**ALWAYS USE**


power supply IP66

	CODE
350mA   3W	90213101
700mA   6W	90215202

more power supplies on page 468

**OPTIONAL**

	CODE
recessed housing plasterkit	90012041
concrete housing	90012040



**2.0**

LED 2/4W | 350-700mA | 6Vf  
PCB 3-step | excl. power supply  
aluminium powder coated

0.42kg IP65

112x185 40 4-40

3000K | >80 CRI | 180-300lm

	CODE
White	709361W4
Black	709361D4

**ALWAYS USE**

power supply IP66

	CODE
350mA   3W	90213101
700mA   6W	90215202

more power supplies on page 468


**OPTIONAL**

	CODE
recessed housing plasterkit	90012043
concrete housing	90012042





**ATIM**  
**EXTERIOR**  
**WALL RECESSED**



**1.0 LED**

LED 6W | 220-240VAC | 50-60Hz  
 PCB 3-step | incl. PS | phase-cut dim  
 stainless steel | satinated glass

0.85kg | IP65 | 0.3m

82x193 | 95

3000K | >80 CRI | 380lm

CODE  
 710184I4


**OPTIONAL**

CODE  
 louvre long 90019106



# ATIM CARRÉ

EXTERIOR  
WALL RECESSED



## 2.0 LED

LED 6W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
stainless steel | satinated glass

0.65kg IP65 3-0.3-16

108x108 86

3000K | >80 CRI | 380lm

CODE

71028414

## OPTIONAL


CODE

louvre carré 90019105



# SMILE ON

EXTERIOR  
WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.43kg IP65

3000K | >80 CRI | 370lm

CODE

702253W4

702253D4

## 2.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.65kg IP65

3000K | >80 CRI | 370lm

CODE

703253W4

703253D4



# TUBE

EXTERIOR  
WALL SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.45kg IP65 38°

3000K | >80 CRI | 480lm

Color	CODE
White	711164W4
Black	711164D4

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.52kg IP65 38°

Color	CODE
White	711120W0
Black	711120D0
Black	711120B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 471



# TUBE

EXTERIOR  
WALL SURFACE



## 2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.74kg | IP65 | 38°

3000K | >80 CRI | 2x480lm

Color	CODE
White	711264W4
Black	711264D4

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.90kg | IP65 | 38°

3000K | >80 CRI | 2x480lm

Color	CODE
White	711220W0
Black	711220D0
Black	711220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9



more lamps and specs on page 471



VISUALISATION

# TUBE CARRÉ

EXTERIOR  
WALL SURFACE



## 1.0 LED

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.22kg IP65 0.9m

3000K | >80 CRI | 480lm

Color	CODE
White	712164W4
Grey	712164D4
Black	712164B4

## 1.0 PAR16

PAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

0.86kg IP65 0.9m

Color	CODE
White	712120W0
Grey	712120D0
Black	712120B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim



Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 471



# TUBE CARRÉ

EXTERIOR  
WALL SURFACE



## 2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

2.27kg IP65

3000K | >80 CRI | 2x480lm

Color	CODE
White	712264W4
Dark Grey	712264D4
Black	712264B4

## 2.0 PAR16

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

1.53kg IP65

3000K | >80 CRI | 2x480lm

Color	CODE
White	712220W0
Dark Grey	712220D0
Black	712220B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

Color	CODE
2700K	905228S2
3000K	905228S4
1800-2850K	901229S9


more lamps and specs on page 471



VISUALISATION

# TUBE CARRÉ

EXTERIOR  
WALL SURFACE



**3.0**

2xPAR16 max.50W | GU10  
220-240VAC | 50-60Hz  
aluminium powder coated

1.52kg IP65 0,9-1

CODE

White	712320W0
Grey	712320D0
Black	712320B0

## OPTIONAL

PAR16 LED GU10 6W  
phase-cut dim

CODE

2700K	905228S2
3000K	905228S4
1800-2850K	901229S9

more lamps and specs on page 471





# STAR

EXTERIOR  
WALL SURFACE



## 1.0

QT14 max.40W | G9  
220-240VAC | 50-60Hz  
stainless steel | glass

0.40kg IP54

CODE  
7131V010


## OPTIONAL

QT14 LED 3W  
CODE  
3000K | 300lm 9019G704



# GETTON

EXTERIOR  
WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal glass

0.83kg IP65 0.3

3000K | >85 CRI | 665lm



	CODE
	717474W4
	717474D4

## OPTIONAL

big cover

	CODE
	911141W1
	911141D1

more details on page 481



## 2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated  
opal glass

0.83kg IP65 0.3

3000K | >85 CRI | 720lm

	CODE
	717374W4
	717374D4

## OPTIONAL

big cover



	CODE
	911141W1
	911141D1

more details on page 481



# SMILE

EXTERIOR  
WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.02kg IP65

3000K | >80 CRI | 480lm

CODE  
703354W4  
703354D4

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.87kg IP65




3000K | >80 CRI | 480lm

CODE  
703454W4  
703454D4



# CENTRAL

EXTERIOR  
WALL SURFACE

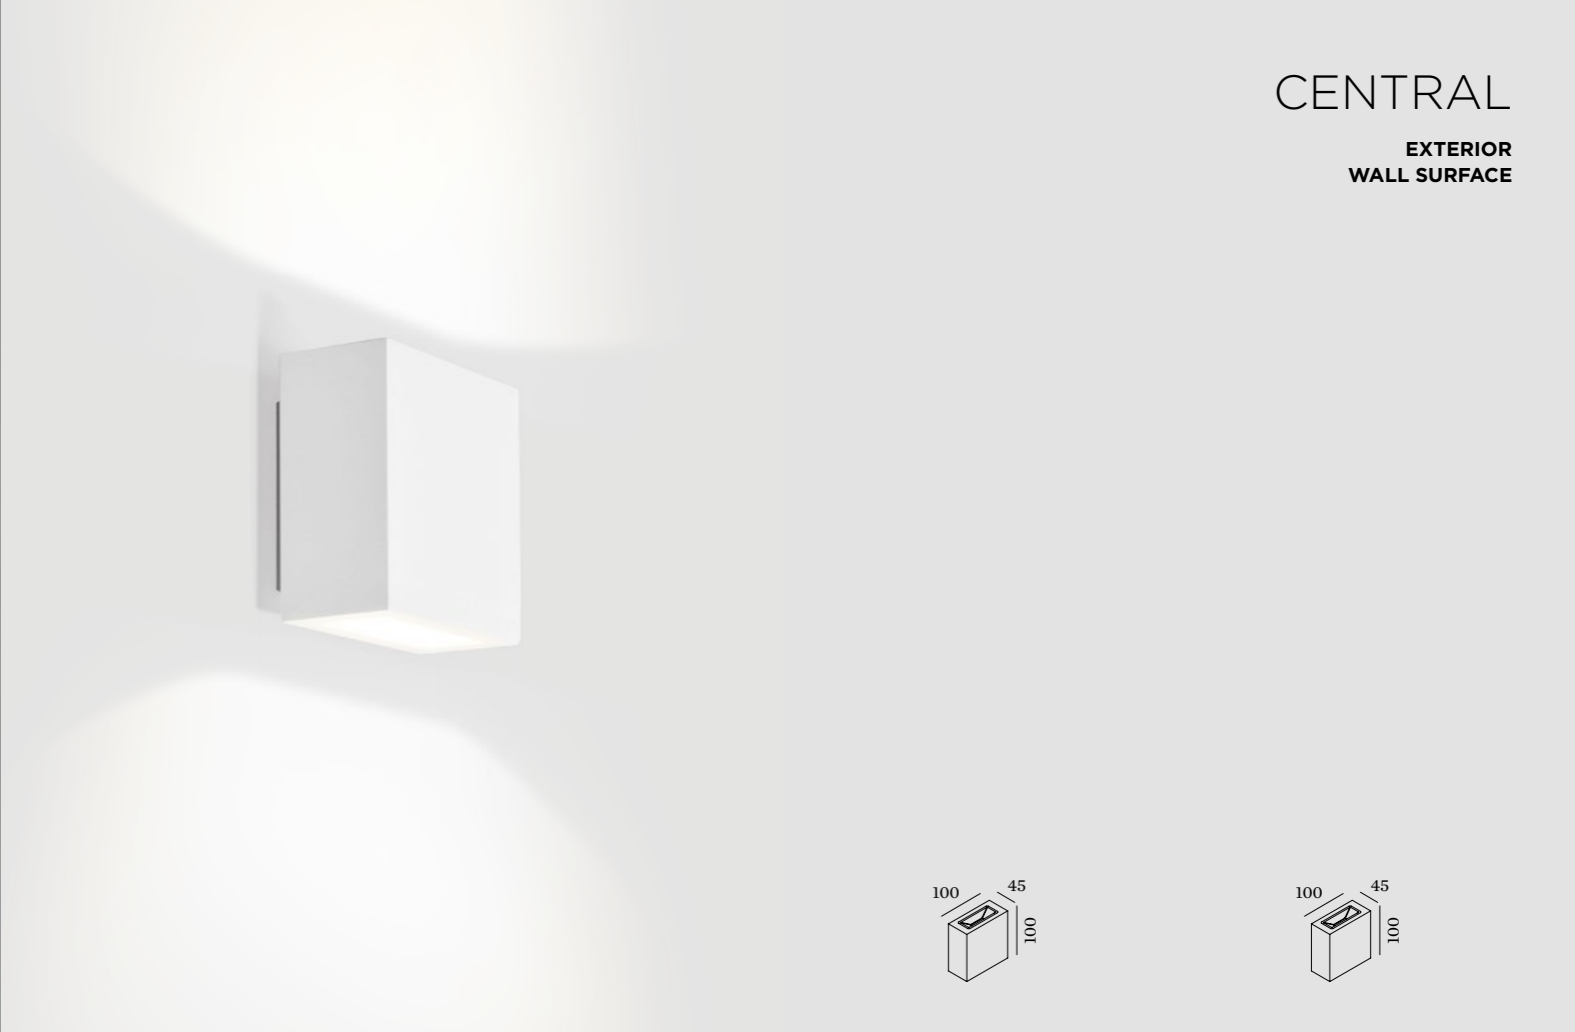

## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.91kg IP65 0.3m

3000K | >80 CRI | 480lm

CODE

313174W4

313174D4

## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.91kg IP65 0.3m

3000K | >80 CRI | 2x290lm

CODE

313274W4




313274D4



PRIVATE RESIDENCE GRAZ | AUSTRIA

# STATION

EXTERIOR  
WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.66kg IP65

3000K | >80 CRI | 480lm

CODE

314174W4

314174D4

## 2.0

2xLED 4W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.66kg IP65

3000K | >80 CRI | 2x290lm

CODE

314274W4


314274D4





# TRAIN

EXTERIOR  
WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.24kg IP65

3000K | >80 CRI | 420lm

CODE

719163W4

719163D4

## 2.0

2xLED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.35kg IP65

3000K | >80 CRI | 2x290lm

CODE

719263W4

719263D4



PRIVATE RESIDENCE KARLOVY VARY | CZECH REPUBLIC








# TRAIN NARROW

EXTERIOR  
WALL SURFACE



## 1.0

LED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

IP65 0.24kg

3000K | >80 CRI | 420lm

CODE

719143D4

## 2.0

2xLED 6W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

IP65 0.35kg

3000K | >80 CRI | 2x290lm  
narrow up/narrow down

CODE

719243D4

3000K | >80 CRI | 2x290lm  
narrow up/flood down

CODE


719253D4



PRIVATE RESIDENCE GRAZ | AUSTRIA

# TAPE

EXTERIOR  
WALL SURFACE



**1.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.73kg | IP65 | 0.3 |

3000K | >80 CRI | 480lm






CODE

722174W4

722174D4



**BOX**  
EXTERIOR  
WALL SURFACE

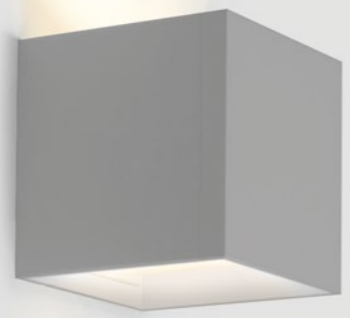

**1.0**

LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.60kg IP65

3000K | >80 CRI | 420lm

	CODE
	714164W4
	714164D4
	714164B4

**2.0**

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.66kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	714144W4
	714144D4
	714144B4

**OPTIONAL**

flaps for adjustable beam angle  
CODE  
900401W0

**3.0**

LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.67kg IP65

3000K | >80 CRI | 420lm

	CODE
	714264W4
	714264D4
	714264B4

**4.0**

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.86kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	714244W4
	714244D4
	714244B4


**OPTIONAL**

flaps for adjustable beam angle  
CODE  
900401W0





RAY  
EXTERIOR  
WALL SURFACE




**1.0**

LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.47kg IP65

3000K | >80 CRI | 420lm

	CODE
	715164W4
	715164D4
	715164B4



**2.0**

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.47kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	715144W4
	715144D4
	715144B4

**OPTIONAL**

flaps for adjustable beam angle  
CODE  
900401W0




**3.0**

LED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.53kg IP65

3000K | >80 CRI | 420lm

	CODE
	715264W4
	715264D4
	715264B4



**4.0**

2xLED 4W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.53kg IP65

3000K | >80 CRI | 2x340lm

	CODE
	715244W4
	715244D4
	715244B4


**OPTIONAL**

flaps for adjustable beam angle  
CODE  
900401W0



# BOXX

EXTERIOR  
WALL SURFACE



## 1.0

2xLED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated


1.13kg | IP65 | 0.3m | 6

3000K | >80 CRI | 2x680lm

	CODE
	730144W4
	730144D4
	730144B4

## OPTIONAL

flaps for adjustable beam angle


	CODE
	900402W0



VISUALISATION

# PALOS

EXTERIOR  
WALL SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.55kg | IP65 | 0.3m |

3000K | >80 CRI | 480lm

CODE

716174W4



716174D4



VISUALISATION

# PALOS

EXTERIOR  
WALL SURFACE

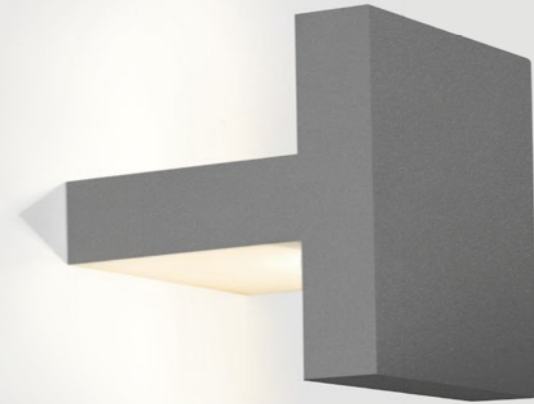

**2.0**

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.86kg | IP65 | 0.3

3000K | >80 CRI | 2x480lm




CODE  
716274W4  
716274D4





# X-BEAM

EXTERIOR  
WALL SURFACE



## 1.0

LED 18W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.28kg IP65  
 $\approx 0,3 \cdot D$   $\odot$   $\Delta$  120°

$\odot$  0/110°

3000K | >80 CRI | 1040lm

CODE  
700264D4

## OPTIONAL

CODE  
snoot 90019005

## 2.0

LED 16W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.28kg IP65  
 $\approx 0,3 \cdot D$   $\odot$   $\Delta$  9x 12°

$\odot$  0/110°

3000K | >80 CRI | 895lm






CODE  
700254D4

## OPTIONAL

CODE  
snoot 90019005



CARD  
EXTERIOR  
FLOOR RECESSED

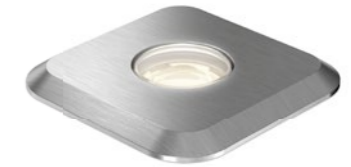

**0.1**

LED 1W | 350mA | 3Vf  
PCB 3-step | excl. power supply  
stainless steel | glass  
aluminium powder coated

0.05kg IP67 >0.3m 60  
22 60

3000K | >80 CRI | 110lm

CODE  
750161I4

**ALWAYS USE**

power supply IP66  
CODE  
350mA | 3W 90213101

**0.2**

LED 1W | 350mA | 3Vf  
PCB 3-step | excl. power supply  
stainless steel | glass  
aluminium powder coated

0.06kg IP67 >0.3m 60  
22 60

3000K | >80 CRI | 110lm

CODE  
750261I4

**ALWAYS USE**

power supply IP66  
CODE  
350mA | 3W 90213101

**0.3**

LED 1W | 350mA | 3Vf  
PCB 3-step | excl. power supply  
stainless steel | glass  
aluminium powder coated

0.06kg IP67 >0.3m 60  
22 60

3000K | >80 CRI | 110lm


CODE  
750361I4

**ALWAYS USE**

power supply IP66  
CODE  
350mA | 3W 90213101



MAP  
EXTERIOR  
FLOOR RECESSED



**0.6**

LED 2W | 100-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel | glass  
aluminium powder coated

0.38kg IP67 38°


45 118

3000K | >80 CRI | 150lm

CODE  
75116314

**OPTIONAL**

recessed housing CODE  
90012201



**0.9**

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

0.70kg IP67 38°


78 135

3000K | >80 CRI | 480lm

CODE  
75126414

**OPTIONAL**

recessed housing CODE  
90012202



**1.2**

LED 9W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

1.01kg IP67 38°

110 160

3000K | >80 CRI | 480lm  
beam angle 24°

CODE  
75135414

beam angle 38°

CODE  
75136414

**OPTIONAL**


recessed housing CODE  
90012203



VISUALISATION

# FLIP

EXTERIOR  
FLOOR RECESSED



## 1.2

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

1.06kg IP67  $\pm 0.3^\circ$   
38°


110 15°/15° 360° 160

3000K | >80 CRI | 480lm

CODE  
75316414

### OPTIONAL

CODE  
recessed housing 90012203



## 1.6

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

1.72kg IP67  $\pm 0.3^\circ$  16

150 15°/15° 360° 185

3000K | >80 CRI | 480lm  
beam angle 24°

CODE  
75325414

beam angle 38°

CODE  
75326414

### OPTIONAL


CODE  
recessed housing 90012204





# CHART

## EXTERIOR FLOOR RECESSED



### 0.6

LED 2W | 100-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
stainless steel | glass  
aluminium powder coated

0.39kg IP67 0.3-0.3 38°


45 118

3000K | >80 CRI | 150lm

CODE  
75216314

### OPTIONAL

recessed housing CODE  
90012201



### 0.9

LED 8W | 220-240VAC | 50-60Hz  
COB 3-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

0.70kg IP67 0.3-0.3 38°


78 135

3000K | >80 CRI | 480lm

CODE  
75226414

### OPTIONAL

recessed housing CODE  
90012202



### 1.2

LED 9W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
stainless steel | glass  
aluminium powder coated

1.05kg IP67 0.3-0.3 24°

110 175

3000K | >80 CRI | 480lm

beam angle 24°  
CODE  
75235414

### OPTIONAL

beam angle 38°  
CODE  
75236414

### OPTIONAL



recessed housing CODE  
90012203





# CHIP

**EXTERIOR  
FLOOR RECESSED**



## 1.2

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
stainless steel | glass

1.10kg IP67 38°  
110 15°/15° 360° 160

3000K | >80 CRI | 480lm

CODE  
75416414

### OPTIONAL

recessed housing CODE  
90012203

## 1.6

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated  
stainless steel | glass

1.83kg IP67 24°  
150 15°/15° 360° 185

3000K | >80 CRI | 480lm  
beam angle 24°

CODE  
75425414

beam angle 38°

CODE  
75426414

### OPTIONAL



recessed housing CODE  
90012204





# FIFTY FIFTY

EXTERIOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.20kg IP65 0.3-1

3000K | >80 CRI | 480lm

CODE

756174D4

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.98kg IP65 0.3-1

3000K | >80 CRI | 480lm

CODE

756274D4

### ALWAYS USE

base with fixation plate

CODE

base 300 910013D0

base 400 910014D0

base 600 910016D0

base 800 910018D0

base 1000 910010D0

base with concrete fixation

CODE

base 300 910073D0

base 400 910074D0

base 600 910076D0

base 800 910078D0

base 1000 910070D0

### ALWAYS USE

base with fixation plate

CODE

base 300 910013D0

base 400 910014D0

base 600 910016D0

base 800 910018D0

base 1000 910010D0

base with concrete fixation

CODE

base 300 910073D0

base 400 910074D0

base 600 910076D0

base 800 910078D0


base 1000 910070D0





# SMILE

## EXTERIOR FLOOR SURFACE



### 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.15kg IP65 0.3

3000K | >80 CRI | 480lm

CODE

703554D4

### ALWAYS USE

base with fixation plate


CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0



### 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.95kg IP65 0.3

3000K | >80 CRI | 480lm

CODE

703654D4

### ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0








# SWAY

## EXTERIOR FLOOR SURFACE



### 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


1.01kg | IP54 | 0.3-1 | 140°/140°

140°/140°

3000K | >80 CRI | 480lm

CODE

720174D4



### 2.0

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.10kg | IP54 | 0.3-1 | 140°/140°

140°/140°

3000K | >80 CRI | 2x480lm

CODE

720274D4



### ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE

base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0

### ALWAYS USE

base with fixation plate

CODE

base 300	910013D0
base 400	910014D0
base 600	910016D0
base 800	910018D0
base 1000	910010D0

base with concrete fixation

CODE


base 300	910073D0
base 400	910074D0
base 600	910076D0
base 800	910078D0
base 1000	910070D0



VISUALISATION

# PALOS

EXTERIOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.40kg | IP65 | 0.3 | 6

3000K | >80 CRI | 480lm

CODE

716374D4

## ALWAYS USE

base with fixation plate

CODE

base 300 ..... 910013D0

base 400 ..... 910014D0

base 600 ..... 910016D0

base 800 ..... 910018D0

base 1000 ..... 910010D0

base with concrete fixation

CODE

base 300 ..... 910073D0

base 400 ..... 910074D0

base 600 ..... 910076D0

base 800 ..... 910078D0


base 1000 ..... 910070D0





# PALOS

**EXTERIOR  
FLOOR SURFACE**



## 2.0

2xLED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.65kg | IP65 | 0.3 | 6

3000K | >80 CRI | 2x480lm

CODE

716474D4

## ALWAYS USE

base with fixation plate

CODE

base 300 ..... 910013D0

base 400 ..... 910014D0

base 600 ..... 910016D0

base 800 ..... 910018D0

base 1000 ..... 910010D0

base with concrete fixation

CODE

base 300 ..... 910073D0

base 400 ..... 910074D0

base 600 ..... 910076D0

base 800 ..... 910078D0


base 1000 ..... 910070D0





# EDGE

EXTERIOR  
FLOOR SURFACE



## 2.0


LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

2.41kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

721174D4



## 4.0


LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

3.34kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm

CODE

721274D4



## 8.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

5.60kg | IP65 | >80 CRI | >480lm

3000K | >80 CRI | 480lm



CODE

721374D4



# TAPE

EXTERIOR  
FLOOR SURFACE

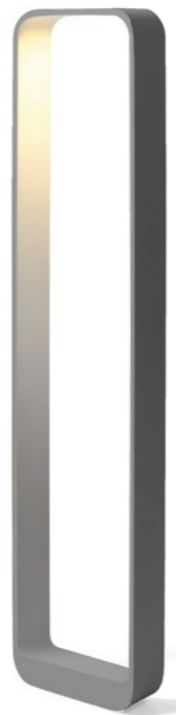

## 4.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


1.92kg IP65

3000K | >80 CRI | 480lm

CODE
722274W4
722274D4

### OPTIONAL

CODE
ground spike 90013102



## 6.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


2.60kg IP65

3000K | >80 CRI | 480lm

CODE
722374W4
722374D4

### OPTIONAL

CODE
ground spike 90013102



## 8.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

3.10kg IP65

3000K | >80 CRI | 480lm


CODE
722474W4
722474D4

### OPTIONAL

CODE
ground spike 90013102



PACE  
EXTERIOR  
FLOOR SURFACE



**4.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


1.00kg IP65 0.3m

3000K | >80 CRI | 480lm

	CODE
	723174W4
	723174D4

**OPTIONAL**

	CODE
ground spike	90013102



**6.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated


1.33kg IP65 0.3m

3000K | >80 CRI | 480lm

	CODE
	723274W4
	723274D4

**OPTIONAL**

	CODE
ground spike	90013102



**8.0**

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.61kg IP65 0.3m

3000K | >80 CRI | 480lm

	CODE
	723374W4
	723374D4





**OPTIONAL**

	CODE
ground spike	90013102



# LINUS

## EXTERIOR FLOOR SURFACE

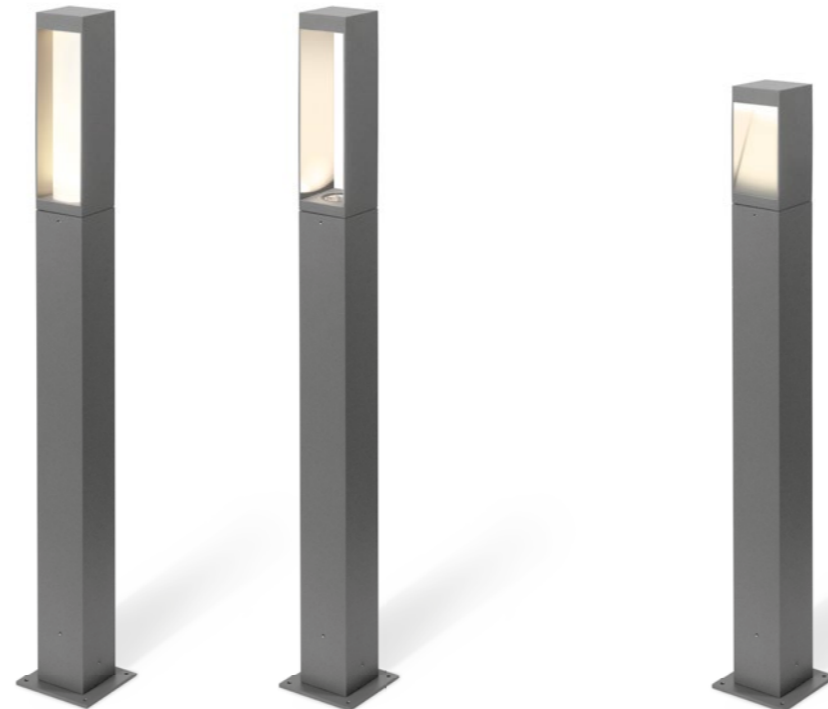

### 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.95kg IP65 0.3-1

3000K | >80 CRI | 320lm

CODE  
726173D4

### ALWAYS USE

	CODE
base 150	910024D0
base 350	910026D0
base 550	910028D0

### OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302

### 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.99kg IP65 0.3-1

3000K | >80 CRI | 300lm | opal glass

CODE  
726273D4

### ALWAYS USE

	CODE
base 150	910024D0
base 350	910026D0
base 550	910028D0

### OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302

### 3.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. power supply  
aluminium powder coated

0.52kg IP65 0.3-1

3000K | >80 CRI | 300lm | opal glass

CODE  
726373D4

### ALWAYS USE

	CODE
base 150	910024D0
base 350	910026D0
base 550	910028D0



### OPTIONAL

	CODE
ground spike	90013103
ground fixation	90013302



# GETTON

EXTERIOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.80kg | IP65 |  $\pm 0.3^\circ$  | G

3000K | >80 CRI | 665lm | opal glass

CODE  
717574D4

## ALWAYS USE

CODE  
base 400 910052D0  
base 600 910054D0  
base 800 910058D0

## OPTIONAL

CODE  
ground spike 90013101

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

0.80kg | IP65 |  $\pm 0.3^\circ$  | G

3000K | >80 CRI | 720lm | clear glass

CODE  
717674D4

## ALWAYS USE

CODE  
base 400 910052D0  
base 600 910054D0  
base 800 910058D0

## OPTIONAL


CODE  
ground spike 90013101





# PALLUZ O

EXTERIOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

2.29kg | IP65 |  $\pm 0.3^\circ$

3000K | >85 CRI | 665lm | opal glass

CODE

724174D4

## ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation


base 230 910032D0

## OPTIONAL

CODE

ground spike for invisible base  
230 90013104

ground fixation for base  
230 | 600 | 800 90013303



## 2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

2.29kg | IP65 |  $\pm 0.3^\circ$

3000K | >85 CRI | 720lm | clear glass

CODE

724274D4

## ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation


base 230 910032D0

## OPTIONAL

CODE

ground spike for invisible base  
230 90013104



ground fixation for base  
230 | 600 | 800 90013303

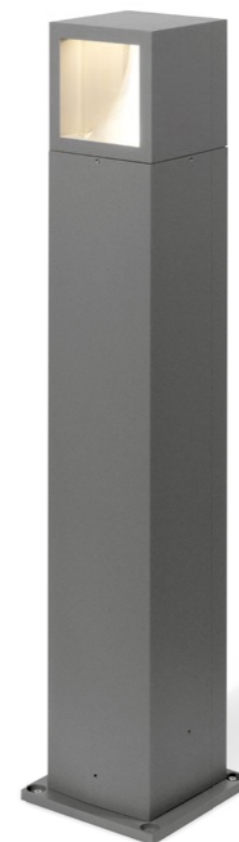



# PALLUZ C

EXTERIOR  
FLOOR SURFACE



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.30kg IP65  $\pm 0.3^\circ$

3000K | >85 CRI | 665lm | opal glass

CODE

724374D4

## ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0

## OPTIONAL

CODE

ground spike for invisible base

230 90013104

ground fixation for base

230 | 600 | 800 90013303

## 2.0

LED 8W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. PS | phase-cut dim  
aluminium powder coated

1.30kg IP65  $\pm 0.3^\circ$

3000K | >85 CRI | 720lm | clear glass

CODE

724474D4

## ALWAYS USE

CODE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0

## OPTIONAL

CODE

ground spike for invisible base

230 90013104

ground fixation for base



230 | 600 | 800 90013303





# POLAR

EXTERIOR  
FLOOR SURFACE

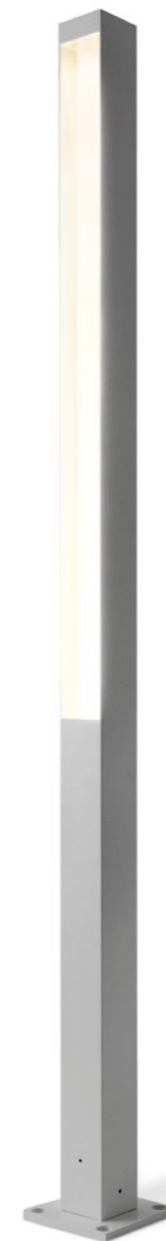

## 1.0

T16 21W | G5  
220-240VAC | 50-60Hz  
aluminium powder coated

5.22kg IP55 0.5



CODE

7251T7W0



7251T7T0

7251T7B0



# STAKE

## EXTERIOR FLOOR PROJECTOR



### 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.55kg | IP54 | 0.3° | 0/120°

0/120°

3000K | >80 CRI | 480lm | 1m cable

	CODE
	727174D4

### OPTIONAL

	CODE
ground spike	90013106
snoot	90019004

### 2.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.50kg | IP54 | 0.3° | 0/120°

0/120°

3000K | >80 CRI | 480lm

	CODE
	727374D4

### ALWAYS USE

	CODE
base 200	910042D0
base 400	910044D0

### OPTIONAL

	CODE
ground spike	90013107
snoot	90019004






PRIVATE RESIDENCE LAUWE | BELGIUM

# STAKE FOLD

**EXTERIOR  
FLOOR PROJECTOR**



## 1.0

LED 8W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

0.78kg | IP54 | 0.3° |


0/90°

3000K | >80 CRI | 480lm

CODE  
727274D4

## OPTIONAL

CODE  
ground spike 90013107  
snoot 90019004







PRIVATE RESIDENCE GRAZ | AUSTRIA

# X-BEAM

EXTERIOR  
FLOOR PROJECTOR



## 1.0

LED 18W | 220-240VAC | 50-60Hz  
COB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.28kg IP65  
 0.3m 120°

0/110°

3000K | >80 CRI | 1040lm

CODE  
700264D4

## OPTIONAL

CODE  
ground spike 90013106  
snoot 90019005

## 2.0

LED 16W | 220-240VAC | 50-60Hz  
PCB 2-step | incl. PS | phase-cut dim  
aluminium powder coated

1.28kg IP65  
 0.3m 9x12°


0/110°

3000K | >80 CRI | 895lm

CODE  
700254D4



## OPTIONAL

CODE  
ground spike 90013106  
snoot 90019005





J.M.  
EXTERIOR  
FLOOR SCULPTURE



**1.0**

LED 16W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated

2.40kg IP65 >0.3

3000K | >80 CRI

	CODE
	728183D4

**OPTIONAL**

	CODE
ground spike	90013109
horizontal	
spike	90013110
horizontal	
with screws	90019008

**2.0**

LED 25W | 220-240VAC | 50-60Hz  
PCB 3-step | incl. power supply  
aluminium powder coated

6.30kg IP65 >0.3

3000K | >80 CRI

	CODE
	728283D4

**OPTIONAL**

	CODE
ground spike	90013109
horizontal	
spike	90013111
horizontal	
with screws	90019009







VISUALISATION

# ALICE

EXTERIOR  
FLOOR SCULPTURE

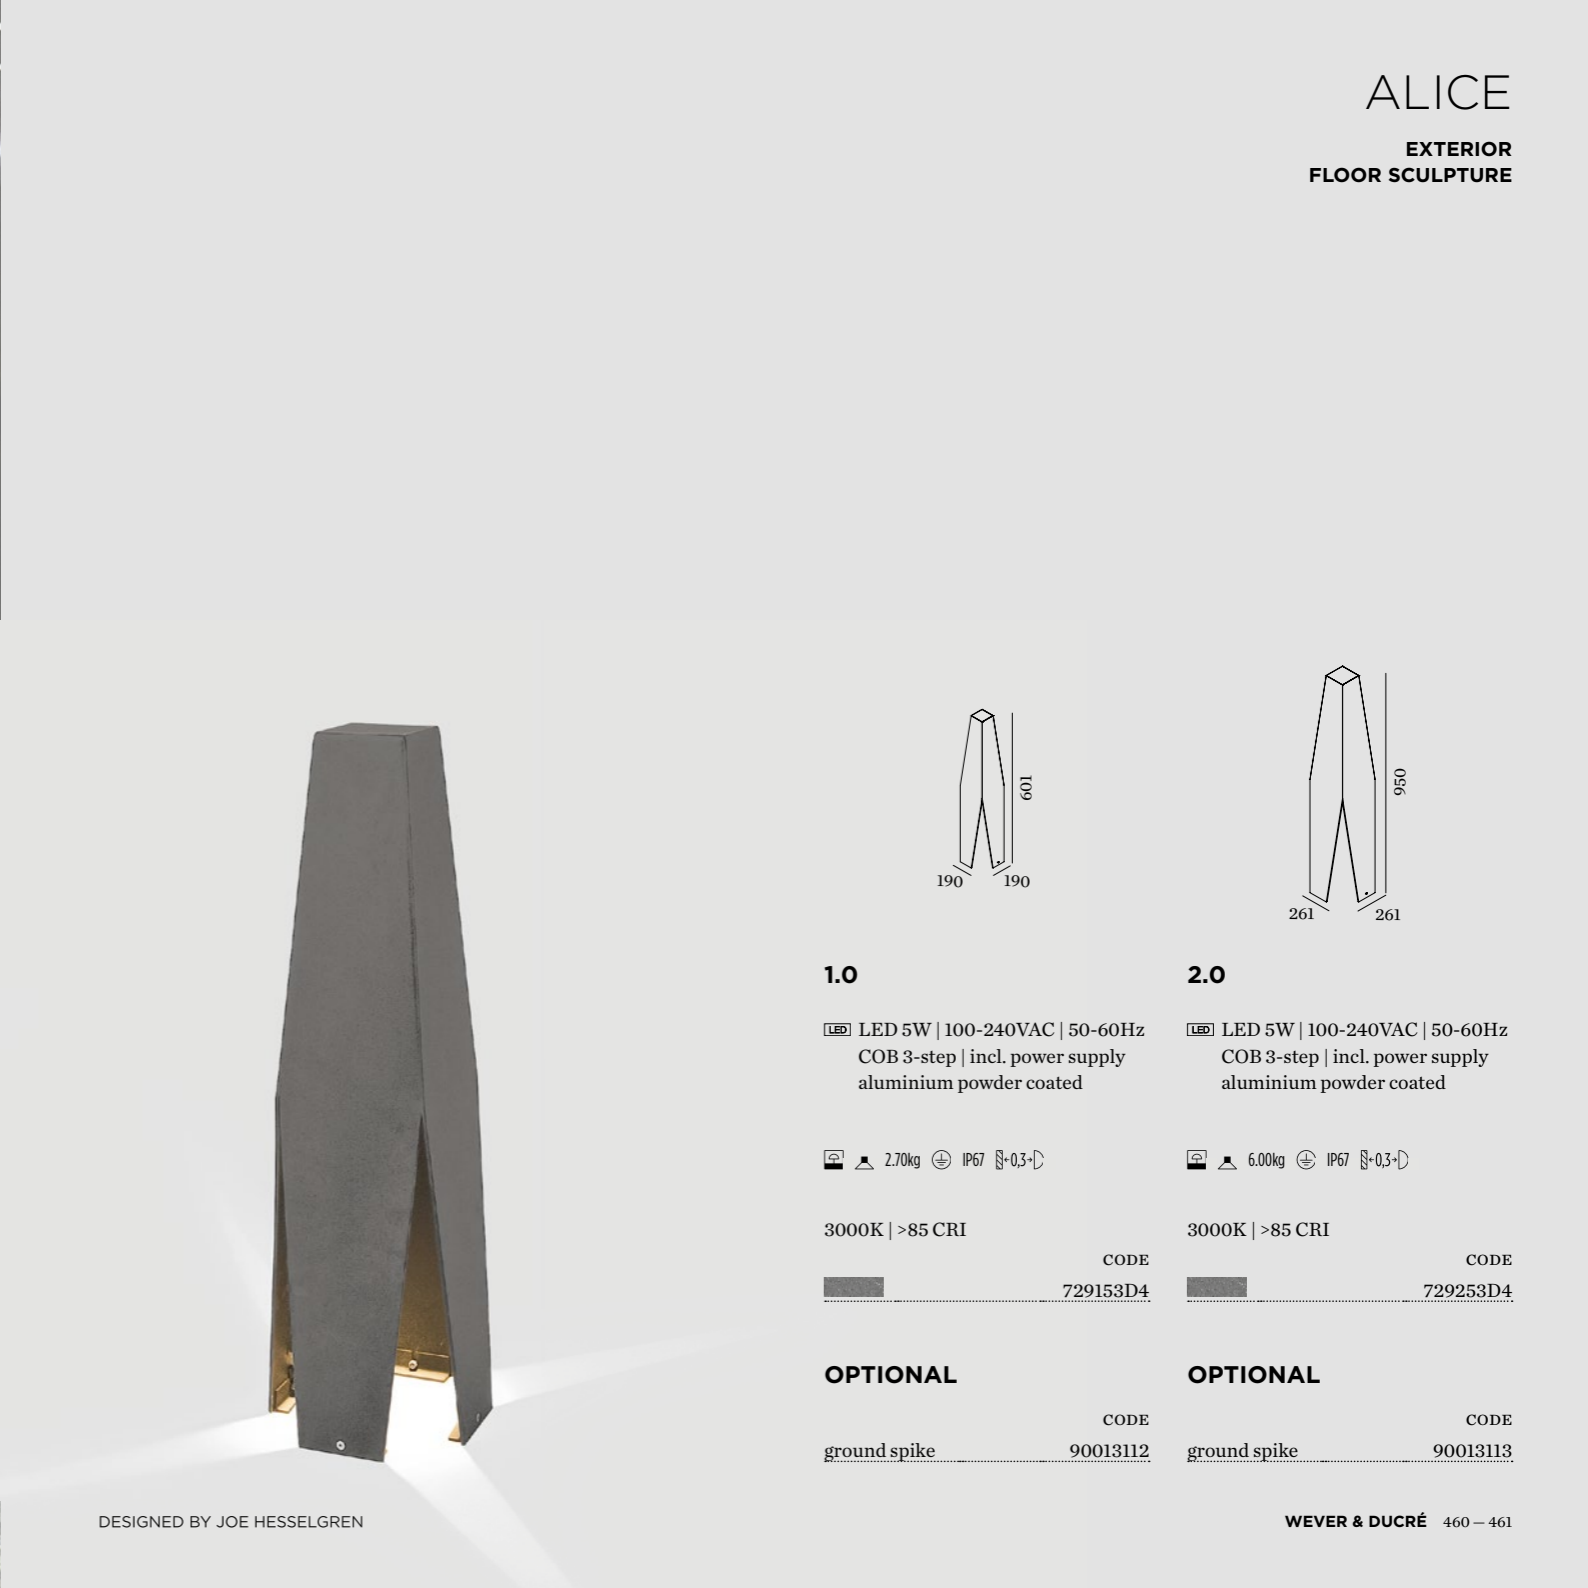

## 1.0

LED 5W | 100-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated

2.70kg IP67

3000K | >85 CRI


CODE

729153D4

## OPTIONAL

CODE

ground spike 90013112



## 2.0

LED 5W | 100-240VAC | 50-60Hz  
COB 3-step | incl. power supply  
aluminium powder coated

6.00kg IP67

3000K | >85 CRI

CODE

729253D4

## OPTIONAL


CODE

ground spike 90013113



**TECHNICAL**

WELL, WELL ... LOOK WHAT THE CAT DRAGGED IN.




**CRI 70+**

**AREA OF APPLICATION**

Offices and shops for average use

**ANWENDBEREBEICH**

*Büro- und Geschäftsräume mit durchschnittlichen Anwendungen*



**CRI 80+**

**AREA OF APPLICATION**

Private homes, offices, and sales areas

**ANWENDBEREBEICH**

*Privaträume, Büros und Verkaufsbereiche*




**CRI 90+**

**AREA OF APPLICATION**

Museums, galleries, exquisite dining, and exclusive products in stores

**ANWENDBEREBEICH**

*Museen, Gallerien, Exquisites Essen und Qualitätsprodukte in Shops*

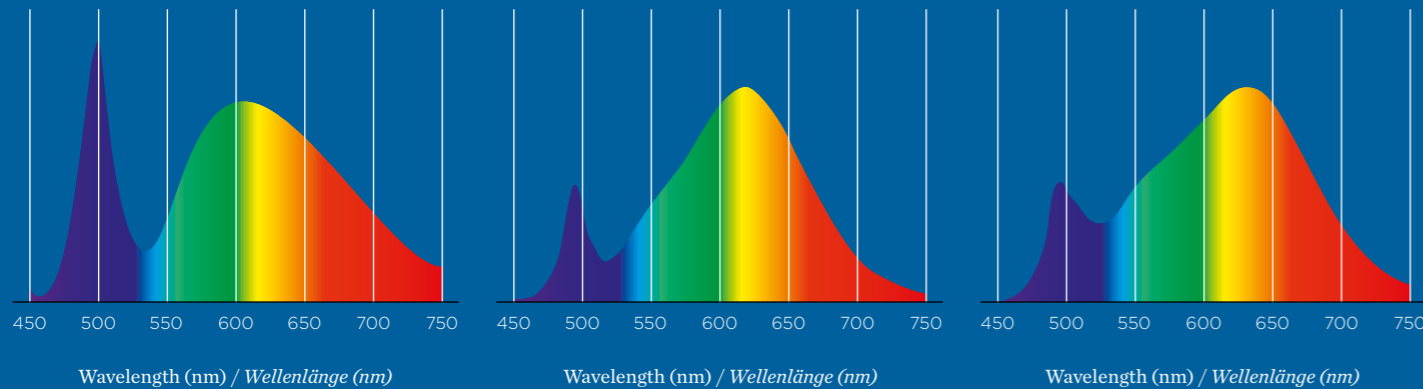


Why do our LEDs put things in the best light? Because they have a colour rendering index above 80. You're probably thinking "Okay...". But what exactly does that mean? The colour rendering index, the CRI, shows the quality of how colours are perceived under artificial light. The higher this value, and 100 CRI would be possible in theory, the more natural and appealing objects look in your home. So your bright red sofa will finally get the attention it deserves!

Warum unsere LEDs die Dinge ins rechte Licht rücken? Weil sie einen Farbwiedergabewert von mindestens >80 haben. Aha, werden Sie sich jetzt denken. Aberwas genau bedeutet das? Nun der Farbwiedergabewert – oder CRI Index – zeigt an, in welcher Qualität Farben von einer künstlichen Lichtquelle wiedergegeben werden. Je höher also dieser Wert ist – theoretisch wären 100 CRI möglich - desto natürlicher und schöner sehen die Objekte in Ihrem Zuhause aus. So bekommt Ihr knallrotes Sofa endlich die Aufmerksamkeit, die es verdient!


YOU HAD ME AT HELLO.

# DIMMING

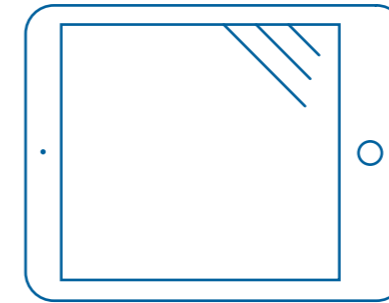

## DIM DALI

*Digital*

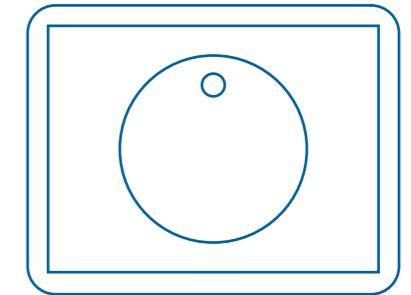

## PHASE CUT DIM

*Triac (Analog)*

### LET THERE BE LIGHT

Would you like to control your light digitally or through the building automation system? No problem! DALI lets you group different lights, dim lights separately, or even program different light ambiance scenarios. Sounds great? It is. Because all you need for this is a five-wire cable and the corresponding software. Then you can control all of your lighting conveniently on your iPad or iPhone. Almost like James Bond.

### ES WERDE LICHT


Sie möchten Ihr Licht digital oder über die Gebäudeautomatisierung steuern? Kein Problem. Mit DALI können Sie verschiedene Leuchten gruppieren, Leuchten separat dimmen und sogar verschiedene Lichtstimmungen vorab einstellen. Klingt toll? Ist es auch. Denn für all das brauchen Sie nur ein 5-poliges Kabel und die entsprechende Software. Danach können Sie die gesamte Beleuchtung mit nur einem Klick über das iPad und iPhone steuern. Fast wie James Bond.

### WHOA THAT'S BRIGHT ...

You will never hear that phrase in your apartment. Because the analogue phase cut dimmer lets you set the light intensity in every room perfectly. What do you need? Normal wiring with a three-wire cable and a suitable dimmer. A solution that is especially perfect when you are renovating your apartment and don't want to change the wiring. And with the Ambient White Dim, you can even set the colour temperature with a simple phase cut dimmer. Nothing could be easier.

### UI, DAS BLENDET

Diesen Satz werden Sie in Ihrer Wohnung garantiert nie hören. Denn mit dem analogen Phasenabschnittsdimmer lässt sich die Lichtintensität in jedem Raum perfekt einstellen. Was Sie dazu brauchen? Eine normale Verkabelung mit einem 3-poligen Kabel und einen passenden Dimmer. Eine Lösung, die vor allem dann perfekt ist, wenn Sie gerade Ihre Wohnung renovieren und die Verkabelung nicht ändern wollen. Und mit dem Ambient White Dim können Sie mit einem einfachen Phasenabschnittsdimmer sogar die Lichtfarbe einstellen. Bequemer geht's nicht.

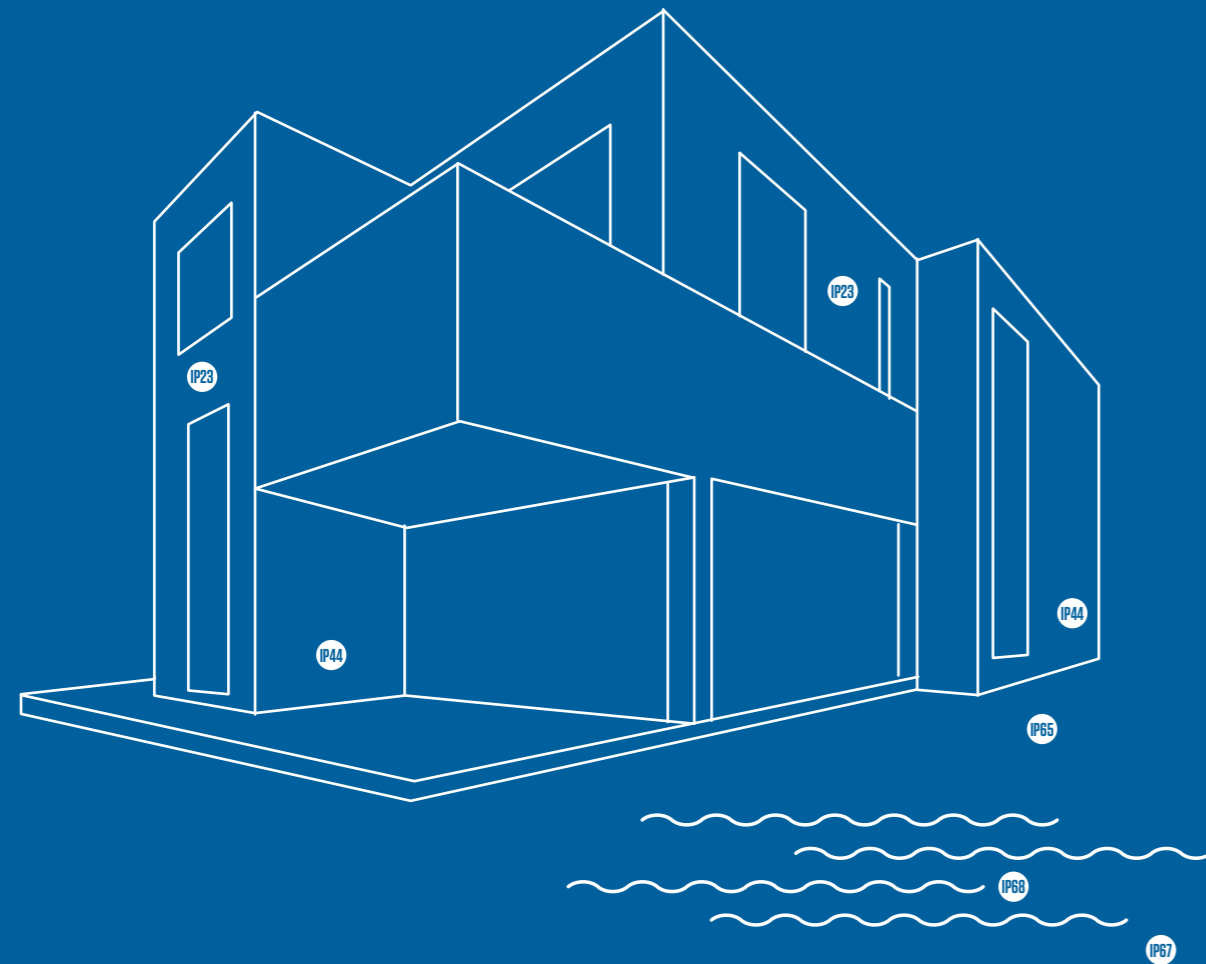

## GENERAL REMARK

We advise to have the lighting devices installed only by a qualified electrician. In case the area is cleaned with water jets, then a minimum of IPX5 is required.

## ALLGEMEINER HINWEIS

Wir empfehlen, die Leuchtkörper nur von einem Elektrofachmann installieren zu lassen. Bei Wasserstrahlreinigung der Umgebung mindestens Wasserschutzklasse IPX5 wählen.

SAFETY FIRST

# IP RATING

## FIRST DIGIT

Protection against dust

*Schutz gegen Festkörper*

## SECOND DIGIT

Protection against water

*Schutz gegen Flüssigkeiten*



No protection  
*Kein Schutz*



Protected against solid objects greater than 50 mm Ø  
*Geschützt vor festen Gegenständen über 50 mm Ø*



No protection  
*Kein Wasserschutz*



Protected against vertically dripping water  
*Geschützt vor senkrecht fallendem Tropfwasser*



Protected against solid objects greater 12 mm Ø  
*Geschützt vor festen Gegenständen über 12 mm Ø*



Protected against solid objects over 2.5mm Ø  
*Geschützt vor festen Gegenständen über 2,5mm Ø*



Protected against dripping water (tilted up to 15°)  
*Geschützt vor schräg fallendem Tropfwasser (bis 15°)*



Protected against spray water  
*Geschützt vor Sprühwasser*



Protected against solid objects greater than 1.0 mm Ø  
*Geschützt vor festen Gegenständen über 1,0 mm Ø*



Dust protected  
*Staubgeschützt*



Protected against splashing water  
*Geschützt vor Spritzwasser*



Protected against water jets from all directions  
*Geschützt vor Strahlwasser aus allen Richtungen*



Dust tight  
*Staubdicht*



Protected against penetrating water during temporary flooding  
*Geschützt vor eindringendem Wasser bei temporärer Überflutung*



Protected against penetrating water during short-term immersion  
*Geschützt vor eindringendem Wasser beim kurzzeitigen Eintauchen*



Protected against submersion  
*Geschützt vor eindringendem Wasser beim Eintauchen*

# POWER SUPPLIES

## ACCESSORIES

### 350mA 4W

Driver 100-240VAC | 50-60Hz  
4W | 350mA | 4-12V  
L/W/H 43x42x23

CE 0.05kg   TÜV IP20

CODE

90213201

### 350mA 6W

Driver 90-264VAC | 50-60Hz  
6W | 350mA | 3-22V  
L/W/H 64x35x21

CE 0.04kg   IP20

**LITO** 2W | **PEEK 0.6** 4,5W  
**STRIPE** 1W | **SEEK GAP** 4,5W  
**EYE** 1W | **SMILE IN** 4W

CODE

90213202

### 350mA 10W

Driver 220-240VAC | 50-60Hz  
10W | 350mA | 13-29V  
L/W/H 102x51x30

CE 0.05kg  SELV  IP20

**DEEP** 7W | **RON** 7W | **RONY** 7W  
**STRANGE** ceiling 7W

CODE

90213402

### 350mA 20W

Driver 220-240VAC | 50-60Hz  
20W | 350mA | 26-57V  
L/W/H 102x51x29.5

CE 0.08kg  SELV  IP20

**DEEP** 7W (2x) | **PEEK 0.8** 7W (2x)  
**RON** 7W (2x) | **RONY** 7W (2x)  
**SEEK** 4,5W (2x)

CODE

90213601

### 700mA 6W

Driver 90-264VAC | 50-60Hz  
6W | 700mA | 3-8.4V  
L/W/H 64x35x21

CE 0.04kg   IP20

**EYE** 2W | **STRIPE** 2W | **THEMIS** 8W  
**STRANGE** wall 2W

CODE

90215203

### 700mA 10W

Driver 220-240VAC | 50-60Hz  
10W | 700mA | 6.5-14.5V  
L/W/H 102x51x30

CE 0.06kg  SELV  IP20

**LUNA** 8W

CODE

90215403

### 700mA 10W DIM

Driver 220-240VAC | 50-60Hz | 10-100%  
10W | 700mA | 7.5-14V | phase-cut dim  
L/W/H 93x53x25

CE 0.09kg    IP20

**LUNA** 8W

CODE

90225401

### 700mA 12W

Driver 220-240VAC | 50-60Hz  
12W | 700mA | 12-15V  
L/W/H 121x45x20

CE 0.09kg  SELV IP20

included in **CORO 1.6 SURFACE**

CODE

90215404

### 500mA 6W

Driver 90-264VAC | 50-60Hz  
6W | 500mA | 3-12V  
L/W/H 64x35x21

CE 0.04kg   EMC IP20

**THEMIS** 5W | **STRANGE** wall 5W  
**LITO** 3W | **SMILE IN** 6W

CODE

90214201

### 500mA 10W

Driver 220-240VAC | 50-60Hz  
10W | 500mA | 9-20V  
L/W/H 102x51x30

CE 0.06kg  SELV  IP20

**DEEP** 10W | **RON** 10W | **RONY** 10W  
**LUNA** 6W | **SEEK** 6W  
**STRANGE** ceiling 5W  
**SEEK GAP** 6W | **PEEK 0.6** 6W

CODE

90214403

### 500mA 35W

Driver 220-240VAC | 50-60Hz  
35W | 500mA | 35-70V  
L/W/H 159x82x34

CE 0.19kg  SELV  IP20

**DEEP** 10W (3x) | **RON** 10W (3x)  
**RONY** 10W (3x)

CODE

90214801

### 500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5-100%  
15W | 500mA | 13.5-30V  
L/W/H 102x51x30 | phase-cut dim

CE 0.08kg  SELV  IP20

**DEEP** 10W | **RON** 10W | **RONY** 10W  
**NOTE 1.2** 10W  
**STRANGE** ceiling 10W

CODE

90224501

### 700mA 14W DIM

Driver 220-240VAC | 50-60Hz | 5-100%  
14W | 700mA | 10-20V | phase-cut dim  
L/W/H 102x51x30

CE 0.07kg  SELV  IP20

included in **CORO 1.3 RECESSED,**  
**CORO 1.6 RECESSED,**  
**CORY 1.6 RECESSED,**  
**CORY 2.1 RECESSED**

CODE

90225501

### 700mA 20W DIM

Driver 180-264VAC | 50-60Hz  
20W | 700mA | 15-28V  
L/W/H 138x50x23 | phase-cut dim

CE 0.15kg   EMC IP20

included in **CORO 2.0 SURFACE,**  
**CORO 2.5 SURFACE, CORY 2.6**  
**SURFACE, CORY 3.4 SURFACE**

CODE

90225601

### 700mA 25W DIM

Driver 220-240VAC | 50-60Hz  
25W | 700mA | 16-35V  
L/W/H 145x51x30 | phase-cut dim

CE 0.12kg  SELV  IP20

included in **CORO 2.0 RECESSED,**  
**CORO 2.5 RECESSED**

CODE

90225701

### 350mA 3W IP66

Driver 90-264VAC | 50-60Hz  
3W | 350mA | 3-15V  
L/W/H 52x30x23

CE 0.05kg   EMC IP66

**ORIS 0.7** 1W | **ORIS 1.3** 2W | **ORIS 2.0** 2W  
**SMILE IN EXTERIOR**  
**CARD**

CODE

90213101

### 500mA 18W DALI

Driver 220-240VAC | 50-60Hz | 1-100%  
18W | 150-1050mA | preset at 500mA  
7.5-54VDC | 35V at 500mA  
touchdim | dali  
L/W/H 119x53x30

CE 0.08kg  SELV   EMC IP20

CODE

90254602

### 500mA 20W

Driver 220-240VAC | 50-60Hz  
20W | 500mA | 18-40V  
L/W/H 102x51x29.5

CE 0.08kg  SELV  IP20

**DEEP** 10W (1-2x) | **RON** 10W (1-2x)  
**RONY** 10W (1-2x)

CODE

90214601

### 500mA 20W DALI

Driver 220-240VAC | 50-60Hz | 1-100%  
20W | 500mA | 9-42.5V  
DSI | switchdim | dali  
L/W/H 207x42x31

CE 0.17kg  SELV  IP20

**DEEP** (1-2x) | **RON** (1-2x)  
**RONY** (1-2x)

CODE

90254601

### 700mA 4W

Driver 100-240VAC | 50-60Hz  
4W | 700mA | 2.5-6V  
L/W/H 43x42x24

CE 0.05kg   IP20

### 350mA 7W IP67

Driver 90-295VAC | 47-63Hz  
7W | 350mA | 10-20V  
L/W/H 57x41x24

CE 0.05kg  SELV  IP67

**NOTE 0.9** 4,5W  
**NOTE 1.2** 7W  
**SMILE IN** 4W

CODE

90213301

### 350mA 18W IP67 DIM

Driver 220-240VAC | 50-60Hz  
18W | 350mA | 4-52V | dim trailing edge  
L/W/H 133x40x30

CE 0.28kg  SELV   IP67

**NOTE 0.9** 6W | **SMILE IN** 6W

CODE

90223602

### 500mA 7W IP67

Driver 90-295VAC | 47-63Hz  
7W | 500mA | 5-14.5V  
L/W/H 57x41x24

CE 0.15kg  SELV IP67

**NOTE 0.9** 6W | **SMILE IN** 6W

CODE

90214301

### 500mA 12W IP67

Driver 120-240VAC | 50-60Hz  
12W | 500mA | 2-26V  
L/W/H 81x40x23

CE 0.15kg  SELV IP67

**NOTE 1.2** 10W

CODE

90214402

# POWER SUPPLIES

## ACCESSORIES

### 700mA 3W IP66

Driver 90-264VAC | 50-60Hz  
3W | 700mA | 3-6V  
L/W/H 52x30x23

CE 0.09kg    EMC IP66

### ORIS 0.7 2W

### 700mA 6W IP67

Driver 120-240VAC | 50-60Hz  
6W | 700mA | 2-10V  
L/W/H 45x45x25

CE 0.05kg    IP67


### ORIS 1.3 4W ORIS 2.0 4W

CODE  
90215101

CODE  
90215202

### 700mA 12W IP67

Driver 120-240VAC | 50-60Hz  
12W | 700mA | 2-18V  
L/W/H 81x40x23

CE 0.28kg  SELV IP67

### 700mA 18W IP67 DIM

Driver 120-240VAC | 50-60Hz  
18W | 700mA | 4-26V | dim trailing edge  
L/W/H 133x40x30

CE 0.28kg    IP67

### TRANSFORMER 12V/105W

230-240VAC | 50-60Hz | 35-105VA  
105W | 12V | DIM leading | trailing edge  
L/W/H 141x40x29

CE 0.12kg  IP20

### TRANSFORMER 12V/60W

230-240VAC | 50-60Hz | 20-60VA  
60W | 12V | DIM leading | trailing edge  
L/W/H 120x40x29

CE 0.1kg  IP20

CODE  
90215402

CODE  
90225602

CODE  
90221903

CODE  
90221902

### DIMMER FOR SWITCH

DIM leading /trailing edge  
230V | max. 200W LED  
L/W/H 48x17,5x46


CE IP30



### DIMMER DIN RAIL

DIM leading /trailing edge  
230V | max. 200W LED  
L/W/H 17x55x90

CE IP30



### CONNECTION BOX 3P

incl. strain relief | 3 pole push  
connector  
L/W/H 75x35x25



CODE  
90059119

### CONNECTION BOX 5P

incl. strain relief | 5 pole push  
connector  
L/W/H 70x60x30



CODE  
90059120

CODE  
90019017

CODE  
90019018

### PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 2700K | 6W | >80 CRI  
390lm | phase-cut dim


CE 0.06kg IP20 



CODE  
901228W2

### PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 2700K | 6W | >90 CRI  
380lm | phase-cut dim

CE 0.06kg IP20 



CODE  
901228B3

### PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 3000K | 6W | >80 CRI  
410lm | phase-cut dim

CE 0.06kg IP20 



CODE  
901228W4

### PAR16 LED 4000K

PAR16 LED | GU10 | 175-250VAC  
50-60Hz | 4000K | 6W | >80 CRI  
450lm | phase-cut dim

CE 0.06kg IP20 



CODE  
901228W6

### QT14 LED 3000K

QT14 LED | G9 | 175-250VAC  
50-60Hz | 3000K | 3W | >80 CRI | 300lm

CE 0.05kg IP20



CODE  
9019G704

### TCR LED 3000K

TCR LED | GX53 | 175-264VAC  
50-60Hz | 3000K | 6W | >80 CRI | 450lm

CE 0.12kg IP20



CODE  
901348W4

### PAR16 LED 2700K

PAR16 LED | GU10 | 220-240VAC  
50-60Hz | 2700K | 5.50W | >80 CRI  
350lm | phase-cut dim

CE 0.06kg IP20 



CODE  
905228S2

### PAR16 LED AMBIENT

PAR16 LED | GU10 | 220-240VAC  
50-60Hz | 1800-3000K | 7W | 380lm  
ambient white phase-cut dim

CE 0.06kg IP20 



CODE  
901229S9

### ES111 LED 2700K

ES111 LED | GU10 | 110-240VAC  
50-60Hz | 2700K | 13W | >80 CRI | 530lm  
phase-cut dim

CE 0.26kg ROHS IP20 



CODE  
901528S2

### PAR16 LED 3000K

PAR16 LED | GU10 | 220-240VAC  
50-60Hz | 3000K | 5.50W | >80 CRI  
350lm | phase-cut dim

CE 0.06kg IP20 



CODE  
905228S4

### QT14 LED 2700K

QT14 LED | G9 | 220-240VAC  
50-60Hz | 2700K | 3W | >80 CRI | 200lm

CE 0.05kg IP20



CODE  
9019G705

### ES111 LED 3000K

ES111 LED | GU10 | 110-240VAC  
50-60Hz | 3000K | 13W | >80 CRI | 530lm  
phase-cut dim


CE 0.26kg ROHS IP20 



CODE  
901528S4

### C35 LED 2700K

C35 LED | E14 | 220-240VAC | 50-60Hz  
2700K | 2W | >85 CRI | 200lm



CODE  
9019C805

### QA60 LED 2200K

QA60 LED | E27 | 220-240VAC  
50-60Hz | 2200K | 6W | >80 CRI | 400lm



CODE  
9003E109

### QA60 LED 2700K DIM

QA60 LED | E27 | 220-240VAC  
50-60Hz | 2700K | 6W | >85 CRI | 550lm  
phase-cut dim



CODE  
9003E125

### ST64 LED 2200K DIM

ST64 LED | E27 | 220-240VAC  
50-60Hz | 2200K | 6W | >80 CRI | 400lm  
phase-cut dim



CODE  
9003E110

### QA60 LAMP 2200K

QA60 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim



CODE  
9003E101

### G95 LAMP 2200K


G95 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim



CODE  
9003E102

### G125 LAMP 2200K

G125 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm  
phase-cut dim



CODE  
9003E103

### T45 LED 2200K

T45 LED | E27 | 220-240VAC | 50-60Hz  
2200K | 4W | >80 CRI | 300lm

**BISHOP**  
**WIRO** 1.8 | 2.0 | 3.8 | 6.1 | 6.5




CODE  
9003E116

### G125 LED 2200K

G125 LED | E27 | 220-240VAC  
50-60Hz | 2200K | 6W | >80 CRI | 400lm

**BISHOP** | **WIRO** 6.1 | 6.5



CODE  
9003E112

### G95 LED 2200K

G95 LED | E27 | 220-240VAC  
50-60Hz | 2200K | 6W | >80 CRI | 400lm

**BISHOP** | **WIRO** 6.1 | 6.5  
**ROCK COLLECTION**



CODE  
9003E111

### G95 LED 2700K OPAL

G95 LED | E27 | 220-240VAC  
50-60Hz | 2700K | 9W | >80 CRI | 806lm

**BISHOP** | **WIRO** 6.1 | 6.5  
**ROCK COLLECTION**



CODE  
9003E126

### ST64 LAMP 2200K

ST64 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm

phase-cut dim  
**WIRO** 1.8 | 3.8 | 6.1 | 6.5



CODE  
9003E105

### T32-180 LAMP 2200K

T32-180 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm

phase-cut dim  
**WIRO** 1.8 | 3.8 | 6.1 | 6.5



CODE  
9003E106

### T32-300 LAMP 2200K

T32-300 CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm

phase-cut dim  
**ROCK COLLECTION**

**WIRO** 6.1 | 6.5



CODE  
9003E107

### T45-S LAMP 2200K

T45-S CARBON FILAMENT | E27  
220-240VAC | 2200K | 15W | 50lm

phase-cut dim  
**WIRO** 1.8 | 2.0 | 3.8 | 6.1 | 6.5



CODE  
9003E104

# PLASTERKITS

## ACCESSORIES

### LUNA 1.0 | INTRA

plasterkit

140x100 9,5 115



CODE  
90017101

### LUNA 2.0

plasterkit

140x100 8 115



CODE  
90017102

### LITO

plasterkit



CODE  
90017119

### THEMIS CARRÉ 0.8


plasterkit



CODE  
90017110

### THEMIS CARRÉ 1.7


plasterkit



CODE  
90017113

### THEMIS CARRÉ 2.7

plasterkit



CODE  
90017114

### SEEK 1.0

plasterkit

98x98 120




CODE  
90017107

### SEEK 2.0

plasterkit

180x98 120




CODE  
90017108

### SEEK 3.0

plasterkit


262x98 120



CODE  
90017109

### THEMIS 1.7

plasterkit



CODE  
90017111

### THEMIS 2.7

plasterkit



CODE  
90017112

### THEMIS 5.0

plasterkit



CODE  
90017115

### PLANO 1.0


plasterkit



CODE  
90017104

### PLANO 2.0


plasterkit



CODE  
90017105

### PLANO 111

plasterkit




CODE  
90017106

### STRANGE 1.0

plasterkit

86x86 120




CODE  
90017116

### STRANGE 1.0 111

plasterkit

153x153 120




CODE  
90017118

### STRANGE 2.0

plasterkit

156x86 120



CODE  
90017117


# RECESSED HOUSING

## ACCESSORIES

### LUNA | INTRA

recessed housing  
always use in combination with  
plasterkit

130x160 122



CODE  
90012026

### SMILE IN

recessed housing

91 55




CODE  
90012030

### LITO

recessed housing

122x90 55




CODE  
90012027

### ORIS 0.7

plasterkit | recessed housing

191x58 60




CODE  
90012039

### ORIS 1.3

plasterkit | recessed housing

122x122 60




CODE  
90012041

### ORIS 2.0

plasterkit | recessed housing

123x191 60



CODE  
90012043

### STRIPE 0.4 | 0.7

plasterkit | recessed housing

75x75 55




CODE  
90012037

### STRIPE 2.2

plasterkit | recessed housing

25x76 55



CODE  
90012038

### THEMIS CARRÉ 0.8

recessed housing  
always use in combination with  
plasterkit

182x160 85




CODE  
90012031

### THEMIS CARRÉ 1.7

recessed housing  
always use in combination with  
plasterkit

272x250 85




CODE  
90012034

### THEMIS CARRÉ 2.7

recessed housing  
always use in combination with  
plasterkit

372x250 85




CODE  
90012035

### THEMIS 1.7

recessed housing  
always use in combination with  
plasterkit

272x160 85




CODE  
90012032

### THEMIS 2.7

recessed housing  
always use in combination with  
plasterkit

372x160 85




CODE  
90012033

### THEMIS 5.0

recessed housing  
always use in combination with  
plasterkit

572x160 85



CODE  
90012036




# RECESSED HOUSING

## ACCESSORIES

### MAP 0.6 | CHART 0.6

recessed housing

⌀ 137 110




CODE  
90012201

### MAP 0.9 | CHART 0.9

recessed housing

⌀ 137 130




CODE  
90012202

### MAP 1.2 | CHART 1.2 FLIP 1.2 | CHIP 1.2

recessed housing

⌀ 190 158




CODE  
90012203

### FLIP 1.6 | CHIP 1.6

recessed housing

⌀ 220 184




CODE  
90012204

### HIDE SMALL 1 LAMP

recessed housing + plasterkit  
aluminium | steel powder coated

115x115 145




CODE  
90012009  
90012017

### HIDE SMALL 2 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated

212x115 145




CODE  
90012010  
90012018

### HIDE SMALL 3 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated

306x115 145




CODE  
90012011  
90012019

### HIDE SMALL 4 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated

402x115 145



CODE  
90012012  
90012020

### EYE

recessed housing

⌀ 55 40




CODE  
90012025

### ORIS 0.7

concrete housing

192x58 60




CODE  
90012044

### ORIS 1.3

concrete housing

121x121 60




CODE  
90012040

### ORIS 2.0

concrete housing

123x191 60




CODE  
90012042

### HIDE BIG 1 LAMP

recessed housing + plasterkit  
aluminium | steel powder coated

175x175 185




CODE  
90012013  
90012021

### HIDE BIG 2 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated

331x175 185




CODE  
90012014  
90012022

### HIDE BIG 3 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated

485x175 185




CODE  
90012015  
90012023

### HIDE BIG 4 LAMPS

recessed housing + plasterkit  
aluminium | steel powder coated


640x175 185



CODE  
90012016  
90012024

## TRACK PROFILE 1M

1-phase




CODE

90014001

90014007

## TRACK PROFILE 2M

1-phase




CODE

90014002

90014008

## TRACK PROFILE 3M

1-phase




CODE

90014003

90014009

## END FEED

left




CODE

90014018

90014019

## END FEED

right



CODE

90014020

90014021

## CONNECTOR

straight



CODE

90014022

90014023

## L-CONNECTOR

left



CODE

90014024

90014025

## FLEXIBLE CORNER

for 1-phase track



CODE

90014042

90014041

## WIRE SUSPENSION

for 1-phase track



CODE

90014039

## SUSPENSION CLAMP

for 1-phase track




CODE

90014038

## GETTON

big cover




CODE

911141W1

911141D1

## L-CONNECTOR

right




CODE

90014026

90014027

## MIDDLE FEED

straight



CODE

90014036

90014037

## END CAP

end cap left / right



CODE

90014028

90014029

## HEIGHT ADJ. SLEEVE

for 1-phase track




CODE

90014040

## ATIM

louvre long




CODE

90019106

## ATIM

louvre carré




CODE

90019105

## STAKE

snoot




CODE

90019004

## X-BEAM

snoot




CODE

90019005

### CORK MULTI


multiple suspension ceiling base  
round for 4 to 8 lamps



CODE  
90052015  
90052016

### CORK MULTI


multiple suspension ceiling base  
600mm 2 lamps



CODE  
90052017  
90052018

### CORK MULTI


900mm 3 lamps



CODE  
90052019  
90052020

### BOX | HEXO | DOCUS RAY MULTI

multiple suspension ceiling base  
round for up to 8 lamps



CODE  
90052005  
90052006

### CORK bottle 1



CODE  
90019013

### CORK bottle 2



CODE  
90019014

### BOX | RAY


flaps for adjustable beam angle



CODE  
900401W0

### BOXX


flaps for adjustable beam angle



CODE  
900402W0

### BOX | HEXO | DOCUS RAY MULTI


multiple suspension ceiling base  
600mm 2 lamps



CODE  
90052007  
90052008

### BOX | HEXO | DOCUS RAY MULTI


900mm 3 lamps



CODE  
90052009  
90052010

### BOX | HEXO | DOCUS RAY MULTI


1200mm 4 lamps



CODE  
90052011  
90052012

### BOX | HEXO | DOCUS RAY MULTI

1500mm 5 lamps



CODE  
90052013  
90052014

**BASE 300**

fifty fifty | smile | sway | palos  
with fixation plate



CODE

910013D0

**BASE 400**

fifty fifty | smile | sway | palos  
with fixation plate



CODE

910014D0

**PALLUZ 230**


invisible fixation base



CODE

910032D0


**PALLUZ 230**



CODE

910033D0


**STAKE POLE 200**



CODE

910042D0

**STAKE POLE 400**




CODE

910044D0

**BASE 600**

fifty fifty | smile | sway | palos  
with fixation plate




CODE

910016D0

**BASE 800**

fifty fifty | smile | sway | palos  
with fixation plate




CODE

910018D0

**BASE 1000**

fifty fifty | smile | sway | palos  
with fixation plate



CODE

910010D0

**BASE 300**


fifty fifty | smile | sway | palos  
with concrete ground fixation



CODE

910073D0


**PALLUZ 600**



CODE

910036D0

**PALLUZ 800**



CODE

910038D0


**LINUS 150**



CODE

910024D0

**LINUS 350**




CODE

910026D0

**BASE 400**

fifty fifty | smile | sway | palos  
with concrete ground fixation




CODE

910074D0

**BASE 600**

fifty fifty | smile | sway | palos  
with concrete ground fixation




CODE

910076D0

**BASE 800**

fifty fifty | smile | sway | palos  
with concrete ground fixation




CODE

910078D0

**BASE 1000**

fifty fifty | smile | sway | palos  
with concrete ground fixation



CODE

910070D0


**LINUS 550**



CODE

910028D0


**GETTON 400**



CODE

910052D0


**GETTON 600**



CODE

910054D0

**GETTON 800**




CODE

910058D0

# GROUND FIXATION


## ACCESSORIES

**TAPE | PACE**  
ground spike



CODE  
90013102

**GETTON POLE**  
ground spike



CODE  
90013101

**LINUS**  
ground spike




CODE  
90013103

**LINUS**  
ground fixation




CODE  
90013302

**J.M. SMALL | MEDIUM**  
ground spike




CODE  
90013109

**J.M. SMALL**  
horizontal spike




CODE  
90013110

**J.M. MEDIUM**  
horizontal spike




CODE  
90013111

**PALLUZ**  
ground fixation



CODE  
90013303

**PALLUZ**  
ground spike only for invisible  
fixation base 230




CODE  
90013104

**STAKE | X-BEAM**  
ground spike



CODE  
90013106

**STAKE POLE | FOLD**  
ground spike



CODE  
90013107

**J.M. SMALL**  
horizontal with screws




CODE  
90019008

**J.M. MEDIUM**  
horizontal with screws




CODE  
90019009

**ALICE SMALL**  
ground spike



CODE  
90013112

**ALICE MEDIUM**  
ground spike



CODE  
90013113

## INDEX ON PRODUCT NAMES

NAME	PAGE	NAME	PAGE	NAME	PAGE
ALICE	460	HEXO MINI WALL	322	ROBY SUSPENDED	206
ARZY	302	HEXO MULTI	190	ROCK COLLECTION CEILING	158
ATIM	366	HEXO SUSPENDED	188	ROCK COLLECTION FLOOR SURFACE	338
ATIM CARRÉ	368	HIDE	58	ROCK COLLECTION SUSPENDED	232
BEBOW CEILING	150	INCH	300	ROCK COLLECTION WALL	330
BEBOW SUSPENDED	222	INTRA	350	RON	42/44/46
BENTA	298	J.J.W. CEILING	156	RONY	40
BENTO	294	J.J.W. SUSPENDED	216	SEEK	92
BISHOP	228	J.J.W. WALL	332	SEEK GAP	94
BOX CEILING	130/352	J.M.	458	SIRRA CEILING	112
BOX MINI WALL	312	LENS	296	SIRRA SUSPENDED	178
BOX MULTI	186	LIGHTDROP	284	SIRRO CEILING	114
BOX SUSPENDED	184	LINUS	442	SIRRO SUSPENDED	200
BOX WALL	314/402	LITO RECESSED	56	SLALOM	86
BOXX	408	LITO WALL RECESSED	262	SMILE	282/386
CARD	416	LOUIS	248	SMILE FLOOR SURFACE	428
CENTRAL	288/388	LUNA ROUND IP44	52	SMILE IN WALL RECESSED	260/362
CHART	422	LUNA SQUARE IP44	54	SMILE ON	280/370
CHIP	424	LYNER	180	SOLID	108
COCOZ ROUND	78	MACBETH	250	SPINO	88
COCOZ SQUARE	80	MAP	418	SPYDER	90
CONCRETE TUBE	182	METRO	292	SQUBE ON BASE	162
CONE	176	MILES	324	SQUBE ON TRACK	164
CORK	208	MOON	286	STAKE	452
CORK MULTI	212	MUST	128	STAKE FOLD	454
CORO CEILING RECESSED/SURFACE	66/124	NOA	214	STAR	382
CORY CEILING RECESSED/SURFACE	62/120	NOP	96	STATION	290/390
CORY SUSPENDED	220	OBOQ ROUND	82	STRANGE CARRÉ	272
CYCLONE	258	OBOQ SQUARE	84	STRANGE CEILING	74
DEEP	22/36	ORIS	278/364	STRANGE WALL RECESSED	270
DEEP ADJUST	28/38	PACE	440	STRIPE	274
DEEP ASYM	32	PALLUZ C	448	SWAY	430
DEEP IP44	34	PALLUZ O	446	TAPE	400
DEEPER	24	PALOS	410	TAPE FLOOR SURFACE	438
DOCUS CEILING	136	PALOS FLOOR SURFACE	432	THEMIS	266
DOCUS MINI WALL	320	PLANO	70	THEMIS CARRÉ	268
DOCUS MULTI	194	PLUXO	98/104	TRAIN	310/394
DOCUS SUSPENDED	192	PLUXO CLUST	204	TRAIN NARROW	398
EDGE	436	PLUXO ON TRACK	170	TUBE CARRÉ	376
ELLO	246	PLUXO#2	102/106	TUBE CEILING	358
ELLO SYSTEM	174	POLAR	450	TUBE WALL	372
EYE	264	PYRAMID	48	VENN CEILING	154
FIFTY FIFTY	426	RAY CEILING	146/356	VENN SUSPENDED	226
FLIP	420	RAY MINI WALL	316	VENN WALL	306
GETTON FLOOR SURFACE	444	RAY MULTI	198	WAHAA	304
GETTON WALL	384	RAY SUSPENDED	196	WIRO	236
GIGANT	252	RAY WALL	318/406	X-BEAM PROJECTOR	456
GO-ON	168	ROB	160/360	X-BEAM WALL	414
HEXO CEILING	140	ROBY	118	YARD	328

# INDEX ON ARTICLE NUMBERS

CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE
110110B0	<b>RONY 1.0</b>	<b>41</b>	111320W0	<b>RON 3.0</b>	<b>47</b>	112361W5C	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112761B5	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	114488W5	<b>LUNA SQUARE 1.0</b>	<b>55</b>	118261W9	<b>PLANO 2.0</b>	<b>71</b>	124161E9	<b>SPYDER 1.0</b>	<b>91</b>	131261W9	<b>STRANGE 2.0</b>	<b>75</b>
110110S0	<b>RONY 1.0</b>	<b>41</b>	111361B3	<b>RON 3.0</b>	<b>47</b>	112361W9	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112761B9	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116168S2	<b>GO-ON 1.0</b>	<b>169</b>	118320S0	<b>PLANO 1.0</b>	<b>73</b>	124161W3	<b>SPYDER 1.0</b>	<b>91</b>	131320B0	<b>STRANGE 1.0</b>	<b>77</b>
110110W0	<b>RONY 1.0</b>	<b>41</b>	111361B5	<b>RON 3.0</b>	<b>47</b>	112361W9C	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112761S3	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116168S4	<b>GO-ON 1.0</b>	<b>169</b>	118320W0	<b>PLANO 1.0</b>	<b>73</b>	124161W5	<b>SPYDER 1.0</b>	<b>91</b>	131320W0	<b>STRANGE 1.0</b>	<b>77</b>
110110W0C	<b>RONY 1.0</b>	<b>41</b>	111361B9	<b>RON 3.0</b>	<b>47</b>	112410B0	<b>DEEP ASYM 1.0</b>	<b>33</b>	112761S5	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116168W2	<b>GO-ON 1.0</b>	<b>169</b>	118330S0	<b>PLANO 1.0</b>	<b>73</b>	124161W9	<b>SPYDER 1.0</b>	<b>91</b>	131330B0	<b>STRANGE 1.0</b>	<b>77</b>
110120B0	<b>RONY 1.0</b>	<b>41</b>	111361W3	<b>RON 3.0</b>	<b>47</b>	112410G0	<b>DEEP ASYM 1.0</b>	<b>33</b>	112761S9	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116168W4	<b>GO-ON 1.0</b>	<b>169</b>	118330W0	<b>PLANO 1.0</b>	<b>73</b>	126173W4	<b>CORY 0.9</b>	<b>63</b>	131330W0	<b>STRANGE 1.0</b>	<b>77</b>
110120S0	<b>RONY 1.0</b>	<b>41</b>	111361W5	<b>RON 3.0</b>	<b>47</b>	112410S0	<b>DEEP ASYM 1.0</b>	<b>33</b>	112761W3	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116268S2	<b>GO-ON 2.0</b>	<b>169</b>	118368S2	<b>PLANO 1.0</b>	<b>73</b>	126274W4	<b>CORY 1.3</b>	<b>63</b>	131368B2	<b>STRANGE 1.0</b>	<b>77</b>
110120W0	<b>RONY 1.0</b>	<b>41</b>	111361W9	<b>RON 3.0</b>	<b>47</b>	112410W0	<b>DEEP ASYM 1.0</b>	<b>33</b>	112761W5	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116268S4	<b>GO-ON 2.0</b>	<b>169</b>	118368S4	<b>PLANO 1.0</b>	<b>73</b>	126374W4	<b>CORY 1.6</b>	<b>63</b>	131368B4	<b>STRANGE 1.0</b>	<b>77</b>
110120W0C	<b>RONY 1.0</b>	<b>41</b>	112110B0	<b>DEEP 1.0</b>	<b>23</b>	112420B0	<b>DEEP ASYM 1.0</b>	<b>33</b>	112761W9	<b>DEEP 2.0 ADJUST 1.0</b>	<b>37</b>	116268W2	<b>GO-ON 2.0</b>	<b>169</b>	118368W2	<b>PLANO 1.0</b>	<b>73</b>	126474W4	<b>CORY 1.9</b>	<b>63</b>	131368W2	<b>STRANGE 1.0</b>	<b>77</b>
110161B3	<b>RONY 1.0</b>	<b>41</b>	112110S0	<b>DEEP 1.0</b>	<b>23</b>	112420S0	<b>DEEP ASYM 1.0</b>	<b>33</b>	113120W0	<b>PYRAMID 1.0</b>	<b>49</b>	116268W4	<b>GO-ON 2.0</b>	<b>169</b>	118368W4	<b>PLANO 1.0</b>	<b>73</b>	126574W4	<b>CORY 2.1</b>	<b>65</b>	131368W4	<b>STRANGE 1.0</b>	<b>77</b>
110161B5	<b>RONY 1.0</b>	<b>41</b>	112110W0	<b>DEEP 1.0</b>	<b>23</b>	112420W0	<b>DEEP ASYM 1.0</b>	<b>33</b>	113161W3	<b>PYRAMID 1.0</b>	<b>49</b>	116368S2	<b>GO-ON 3.0</b>	<b>169</b>	119130J0	<b>COCOZ ROUND 1.0</b>	<b>79</b>	126674W4	<b>CORY 2.6</b>	<b>65</b>	132164B4	<b>BEBOW 2.0</b>	<b>151</b>
110161B9	<b>RONY 1.0</b>	<b>41</b>	112110W0C	<b>DEEP 1.1</b>	<b>23</b>	112461B3	<b>DEEP ASYM 1.0</b>	<b>33</b>	113161W5	<b>PYRAMID 1.0</b>	<b>49</b>	116368S4	<b>GO-ON 3.0</b>	<b>169</b>	119130U0	<b>COCOZ ROUND 1.0</b>	<b>79</b>	126774W4	<b>CORY 3.4</b>	<b>65</b>	132164W4	<b>BEBOW 2.0</b>	<b>151</b>
110161S3	<b>RONY 1.0</b>	<b>41</b>	112120B0	<b>DEEP 1.0</b>	<b>23</b>	112461B5	<b>DEEP ASYM 1.0</b>	<b>33</b>	113161W9	<b>PYRAMID 1.0</b>	<b>49</b>	116368W2	<b>GO-ON 3.0</b>	<b>169</b>	119168J2	<b>COCOZ ROUND 1.0</b>	<b>79</b>	127273W4	<b>CORO 0.8</b>	<b>67</b>	132184B4	<b>BEBOW 1.0</b>	<b>151</b>
110161S5	<b>RONY 1.0</b>	<b>41</b>	112120S0	<b>DEEP 1.0</b>	<b>23</b>	112461B9	<b>DEEP ASYM 1.0</b>	<b>33</b>	113220W0	<b>PYRAMID 2.0</b>	<b>49</b>	116368W4	<b>GO-ON 3.0</b>	<b>169</b>	119168J4	<b>COCOZ ROUND 1.0</b>	<b>79</b>	127374W4	<b>CORO 1.1</b>	<b>67</b>	132184W4	<b>BEBOW 1.0</b>	<b>151</b>
110161S9	<b>RONY 1.0</b>	<b>41</b>	112120W0	<b>DEEP 1.0</b>	<b>23</b>	112461G3	<b>DEEP ASYM 1.0</b>	<b>33</b>	113261W3	<b>PYRAMID 2.0</b>	<b>49</b>	117120B0	<b>HIDE 1.0</b>	<b>59</b>	119168U2	<b>COCOZ ROUND 1.0</b>	<b>79</b>	127474W4	<b>CORO 1.3</b>	<b>67</b>	132264B4	<b>BEBOW 4.0</b>	<b>153</b>
110161W3	<b>RONY 1.0</b>	<b>41</b>	112120W0C	<b>DEEP 1.0</b>	<b>23</b>	112461G5	<b>DEEP ASYM 1.0</b>	<b>33</b>	113261W5	<b>PYRAMID 2.0</b>	<b>49</b>	117120S0	<b>HIDE 1.0</b>	<b>59</b>	119168U4	<b>COCOZ ROUND 1.0</b>	<b>79</b>	127574W4	<b>CORO 1.4</b>	<b>67</b>	132264W4	<b>BEBOW 4.0</b>	<b>153</b>
110161W3C	<b>RONY 1.0</b>	<b>41</b>	112161B3	<b>DEEP 1.0</b>	<b>23</b>	112461G9	<b>DEEP ASYM 1.0</b>	<b>33</b>	113261W9	<b>PYRAMID 2.0</b>	<b>49</b>	117120W0	<b>HIDE 1.0</b>	<b>59</b>	119230J0	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	127674W4	<b>CORO 1.6</b>	<b>69</b>	132284B4	<b>BEBOW 3.0</b>	<b>153</b>
110161W5	<b>RONY 1.0</b>	<b>41</b>	112161B5	<b>DEEP 1.0</b>	<b>23</b>	112461S3	<b>DEEP ASYM 1.0</b>	<b>33</b>	113320W0	<b>PYRAMID 1.0</b>	<b>51</b>	117161B3	<b>HIDE 1.0</b>	<b>59</b>	119230U0	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	127774W4	<b>CORO 2.0</b>	<b>69</b>	132284W4	<b>BEBOW 3.0</b>	<b>153</b>
110161W5C	<b>RONY 1.0</b>	<b>41</b>	112161B9	<b>DEEP 1.0</b>	<b>23</b>	112461S5	<b>DEEP ASYM 1.0</b>	<b>33</b>	113330W0	<b>PYRAMID 1.0</b>	<b>51</b>	117161B5	<b>HIDE 1.0</b>	<b>59</b>	119268J2	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	127874W4	<b>CORO 2.5</b>	<b>69</b>	132364B4	<b>BEBOW 2.0</b>	<b>223</b>
110161W9	<b>RONY 1.0</b>	<b>41</b>	112161S3	<b>DEEP 1.0</b>	<b>23</b>	112461S9	<b>DEEP ASYM 1.0</b>	<b>33</b>	113368W2	<b>PYRAMID 1.0</b>	<b>51</b>	117161B9	<b>HIDE 1.0</b>	<b>59</b>	119268J4	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	128161B4	<b>SEEK 1.0</b>	<b>93</b>	132364W4	<b>BEBOW 2.0</b>	<b>223</b>
110161W9C	<b>RONY 1.0</b>	<b>41</b>	112161S5	<b>DEEP 1.0</b>	<b>23</b>	112461W3	<b>DEEP ASYM 1.0</b>	<b>33</b>	113368W4	<b>PYRAMID 1.0</b>	<b>51</b>	117161S3	<b>HIDE 1.0</b>	<b>59</b>	119268U2	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	128161W4	<b>SEEK 1.0</b>	<b>93</b>	132384B4	<b>BEBOW SUSP. 1.0</b>	<b>223</b>
111110B0	<b>RON 1.0</b>	<b>43</b>	112161S9	<b>DEEP 1.0</b>	<b>23</b>	112461W5	<b>DEEP ASYM 1.0</b>	<b>33</b>	114120B0	<b>LUNA ROUND 1.0</b>	<b>53</b>	117161S5	<b>HIDE 1.0</b>	<b>59</b>	119268U4	<b>COCOZ SQUARE 1.0</b>	<b>81</b>	128261B4	<b>SEEK 2.0</b>	<b>93</b>	132384W4	<b>BEBOW SUSP. 1.0</b>	<b>223</b>
111110S0	<b>RON 1.0</b>	<b>43</b>	112161W3	<b>DEEP 1.0</b>	<b>23</b>	112461W9	<b>DEEP ASYM 1.0</b>	<b>33</b>	114120M0	<b>LUNA ROUND 1.0</b>	<b>53</b>	117161S9	<b>HIDE 1.0</b>	<b>59</b>	120130J0	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128261W4	<b>SEEK 2.0</b>	<b>93</b>	132464B4	<b>BEBOW 4.0</b>	<b>225</b>
111110W0	<b>RON 1.0</b>	<b>43</b>	112161W3C	<b>DEEP 1.0</b>	<b>23</b>	112520B0	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114120W0	<b>LUNA ROUND 1.0</b>	<b>53</b>	117161W3	<b>HIDE 1.0</b>	<b>59</b>	120130E0	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128361B4	<b>SEEK 3.0</b>	<b>93</b>	132464W4	<b>BEBOW 4.0</b>	<b>225</b>
111110W0C	<b>RON 1.0</b>	<b>43</b>	112161W5	<b>DEEP 1.0</b>	<b>23</b>	112520W0	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114220B0	<b>LUNA SQUARE 1.0</b>	<b>55</b>	117161W5	<b>HIDE 1.0</b>	<b>59</b>	120130K0	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128361W4	<b>SEEK 3.0</b>	<b>93</b>	132484B4	<b>BEBOW SUSP. 3.0</b>	<b>225</b>
111120B0	<b>RON 1.0</b>	<b>43</b>	112161W5C	<b>DEEP 1.0</b>	<b>23</b>	112530B0	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114220M0	<b>LUNA SQUARE 1.0</b>	<b>55</b>	117161W9	<b>HIDE 1.0</b>	<b>59</b>	120168E2	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128461B4	<b>SEEK GAP 1.0</b>	<b>95</b>	132484W4	<b>BEBOW SUSP. 3.0</b>	<b>225</b>
111120S0	<b>RON 1.0</b>	<b>43</b>	112161W9	<b>DEEP 1.0</b>	<b>23</b>	112530W0	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114220W0	<b>LUNA SQUARE 1.0</b>	<b>55</b>	117230B0	<b>HIDE 1.0</b>	<b>61</b>	120168E4	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128461W4	<b>SEEK GAP 1.0</b>	<b>95</b>	133120B0	<b>SOLID 1.0</b>	<b>109</b>
111120W0	<b>RON 1.0</b>	<b>43</b>	112161W9C	<b>DEEP 1.0</b>	<b>23</b>	112568B2	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114381B3	<b>LUNA ROUND 1.0</b>	<b>53</b>	117230S0	<b>HIDE 1.0</b>	<b>61</b>	120168J2	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128561B4	<b>SEEK GAP 2.0</b>	<b>95</b>	133120K0	<b>SOLID 1.0</b>	<b>109</b>
111120W0C	<b>RON 1.0</b>	<b>43</b>	112310B0	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112568B4	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114381B5	<b>LUNA ROUND 1.0</b>	<b>53</b>	117230W0	<b>HIDE 1.0</b>	<b>61</b>	120168J4	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128561W4	<b>SEEK GAP 2.0</b>	<b>95</b>	133120P0	<b>SOLID 1.0</b>	<b>109</b>
111161B3	<b>RON 1.0</b>	<b>43</b>	112310G0	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112568W2	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114381B9	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268B2	<b>HIDE 1.0</b>	<b>61</b>	120168K2	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128661B4	<b>SEEK GAP 3.0</b>	<b>95</b>	133120W0	<b>SOLID 1.0</b>	<b>109</b>
111161B5	<b>RON 1.0</b>	<b>43</b>	112310S0	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112568W4	<b>DEEP ADJUST 1.0</b>	<b>39</b>	114381M3	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268B4	<b>HIDE 1.0</b>	<b>61</b>	120168K4	<b>OBOQ ROUND 1.0</b>	<b>83</b>	128661W4	<b>SEEK GAP 3.0</b>	<b>95</b>	133164B3	<b>SOLID 1.0</b>	<b>109</b>
111161B9	<b>RON 1.0</b>	<b>43</b>	112310W0	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112610B0	<b>DEEP IP44 1.0</b>	<b>35</b>	114381M5	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268S2	<b>HIDE 1.0</b>	<b>61</b>	120230J0	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	130210S0	<b>NOP 1.0</b>	<b>97</b>	133164B5	<b>SOLID 1.0</b>	<b>109</b>
111161S3	<b>RON 1.0</b>	<b>43</b>	112310W0C	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112610S0	<b>DEEP IP44 1.0</b>	<b>35</b>	114381M9	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268S4	<b>HIDE 1.0</b>	<b>61</b>	120230E0	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	130210W0	<b>NOP 1.0</b>	<b>97</b>	133164B9	<b>SOLID 1.0</b>	<b>109</b>
111161S5	<b>RON 1.0</b>	<b>43</b>	112320B0	<b>DEEP ADJUST</b>	<b>29</b>	112610W0	<b>DEEP IP44 1.0</b>	<b>35</b>	114381W3	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268W2	<b>HIDE 1.0</b>	<b>61</b>	120230K0	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	130220S0	<b>NOP 1.0</b>	<b>97</b>	133164K3	<b>SOLID 1.0</b>	<b>109</b>
111161S9	<b>RON 1.0</b>	<b>43</b>	112320G0	<b>DEEP ADJUST</b>	<b>29</b>	112620B0	<b>DEEP IP44 1.0</b>	<b>35</b>	114381W5	<b>LUNA ROUND 1.0</b>	<b>53</b>	117268W4	<b>HIDE 1.0</b>	<b>61</b>	120268J2	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	130220W0	<b>NOP 1.0</b>	<b>97</b>	133164K5	<b>SOLID 1.0</b>	<b>109</b>
111161W3	<b>RON 1.0</b>	<b>43</b>	112320S0	<b>DEEP ADJUST</b>	<b>29</b>	112620S0	<b>DEEP IP44 1.0</b>	<b>35</b>	114381W9	<b>LUNA ROUND 1.0</b>	<b>53</b>	118120S0	<b>PLANO 1.0</b>	<b>71</b>	120268J4	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	131120B0	<b>STRANGE 1.0</b>	<b>75</b>	133164K9	<b>SOLID 1.0</b>	<b>109</b>
111161W3C	<b>RON 1.0</b>	<b>43</b>	112320W0	<b>DEEP ADJUST</b>	<b>29</b>	112620W0	<b>DEEP IP44 1.0</b>	<b>35</b>	114388B5	<b>LUNA ROUND 1.0</b>	<b>53</b>	118120W0	<b>PLANO 1.0</b>	<b>71</b>	120268K2	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	131120W0	<b>STRANGE 1.0</b>	<b>75</b>	133164P3	<b>SOLID 1.0</b>	<b>109</b>
111161W5	<b>RON 1.0</b>	<b>43</b>	112320W0C	<b>DEEP ADJUST</b>	<b>29</b>	112661B3	<b>DEEP IP44 1.0</b>	<b>35</b>	114388M5	<b>LUNA ROUND 1.0</b>	<b>53</b>	118161S3	<b>PLANO 1.0</b>	<b>71</b>	120268E2	<b>OBOQ SQUARE 1.0</b>	<b>85</b>	131161B3	<b>STRANGE 1.0</b>	<b>75</b>	133164P5	<b>SOLID 1.0</b>	<b>109</b>
111161W5C	<b>RON 1.0</b>	<b>43</b>	112361B3	<b>DEEP ADJUST 1.0</b>	<b>29</b>	112661B5	<b>DEEP IP44 1.0</b>	<b>35</b>	114388W5	<b>LUNA ROUND 1.0</b>	<b>53</b>	118161S5	<b>PLANO 1.0</b>	<b>71</b>	120268E4	<b>OBOQ SQUARE </b>							





CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE
146720Q0	RAY CEILING 1.0	147	201163W4	LYNER 2.5	181	207220L0	BOX SUSP. 3.0	185	207520L0	DOCUS SUSP. 2.0	193	207764P4	RAY SUSP. 2.0	197	2182E0D0	BISHOP 6.0	229	2223E800	ROCK NAKED 1.0	343	227264W4	BOX MULTI SUSP. 3.0	187																					
146720W0	RAY CEILING 1.0	147	201263L4	LYNER 4.5	181	207220P0	BOX SUSP. 3.0	185	207520P0	DOCUS SUSP. 2.0	193	207764P9	RAY SUSP. 2.0	197	2182E0K0	BISHOP 6.0	229	2231E8D0	ROCK 5.0	331	227264W9	BOX MULTI SUSP. 3.0	187																					
146764B2	RAY CEILING 1.0	147	201263W4	LYNER 4.5	181	207220W0	BOX SUSP. 3.0	185	207520W0	DOCUS SUSP. 2.0	193	207764W2	RAY SUSP. 2.0	197	2182E0W0	BISHOP 6.0	229	2231E8S0	ROCK 5.0	331	227320B0	HEXO MULTI SUSP. 2.0	191																					
146764B4	RAY CEILING 1.0	147	201363L4	LYNER 3.8	181	207264B2	BOX SUSP. 3.0	185	207564B2	DOCUS SUSP. 2.0	193	207764W4	RAY SUSP. 2.0	197	2183E0D0	BISHOP 8.0	229	2231E8W0	ROCK 5.0	331	227320G0	HEXO MULTI SUSP. 2.0	191																					
146764B9	RAY CEILING 1.0	147	201363W4	LYNER 3.8	181	207264B4	BOX SUSP. 3.0	185	207564B4	DOCUS SUSP. 2.0	193	207764W9	RAY SUSP. 2.0	197	2183E0K0	BISHOP 8.0	229	2241E8B0	ROCK TABLE 3.0	345	227320P0	HEXO MULTI SUSP. 2.0	191																					
146764G2	RAY CEILING 1.0	147	201463L4	LYNER 5.8	181	207264B9	BOX SUSP. 3.0	185	207564B9	DOCUS SUSP. 2.0	193	207820B0	RAY SUSP. 3.0	197	2183E0W0	BISHOP 8.0	229	2241E8D0	ROCK 8.0	339	227320Q0	HEXO MULTI SUSP. 2.0	191																					
146764G4	RAY CEILING 1.0	147	201463W4	LYNER 5.8	181	207264L2	BOX SUSP. 3.0	185	207564G2	DOCUS SUSP. 2.0	193	207820L0	RAY SUSP. 3.0	197	219185W4	CYCLONE 17.0	259	2241E8S0	ROCK 8.0	339	227364B2	HEXO MULTI SUSP. 2.0	191																					
146764G9	RAY CEILING 1.0	147	202163T4	CONCRETE TUBE 2.0	183	207264L4	BOX SUSP. 3.0	185	207564G4	DOCUS SUSP. 2.0	193	207820P0	RAY SUSP. 3.0	197	2201E8D0	ROCK SUSP. 3.0	233	2241E8W0	ROCK 8.0	339	227364B4	HEXO MULTI SUSP. 2.0	191																					
146764L2	RAY CEILING 1.0	147	202163W4	CONCRETE TUBE 2.0	183	207264L9	BOX SUSP. 3.0	185	207564G9	DOCUS SUSP. 2.0	193	207820W0	RAY SUSP. 3.0	197	2201E8S0	ROCK SUSP. 3.0	233	2242E8B0	ROCK TABLE 3.0	345	227364B9	HEXO MULTI SUSP. 2.0	191																					
146764L4	RAY CEILING 1.0	147	202263T4	CONCRETE TUBE 4.0	183	207264P2	BOX SUSP. 3.0	185	207564L2	DOCUS SUSP. 2.0	193	207864B2	RAY SUSP. 3.0	197	2201E8W0	ROCK SUSP. 3.0	233	2243E8B0	ROCK TABLE 3.0	345	227364G2	HEXO MULTI SUSP. 2.0	191																					
146764L9	RAY CEILING 1.0	147	202263W4	CONCRETE TUBE 4.0	183	207264P4	BOX SUSP. 3.0	185	207564L4	DOCUS SUSP. 2.0	193	207864B4	RAY SUSP. 3.0	197	2202E8D0	ROCK SUSP. 4.0	233	2244E8B0	ROCK TABLE 4.0	345	227364G4	HEXO MULTI SUSP. 2.0	191																					
146764P2	RAY CEILING 1.0	147	202363T4	CONCRETE TUBE 4.5	183	207264P9	BOX SUSP. 3.0	185	207564L9	DOCUS SUSP. 2.0	193	207864B9	RAY SUSP. 3.0	197	2202E8S0	ROCK SUSP. 4.0	233	2245E8B0	ROCK TABLE 4.0	345	227364G9	HEXO MULTI SUSP. 2.0	191																					
146764P4	RAY CEILING 1.0	147	202363W4	CONCRETE TUBE 4.5	183	207264W2	BOX SUSP. 3.0	185	207564P2	DOCUS SUSP. 2.0	193	207864L2	RAY SUSP. 3.0	197	2202E8W0	ROCK SUSP. 4.0	233	2246E8B0	ROCK TABLE 4.0	345	227364P2	HEXO MULTI SUSP. 2.0	191																					
146764P9	RAY CEILING 1.0	147	204184B2	NOA 2.6	215	207264W4	BOX SUSP. 3.0	185	207564P4	DOCUS SUSP. 2.0	193	207864L4	RAY SUSP. 3.0	197	2203E8D0	ROCK SUSP. 3.0	233	2247E8B0	ROCK TABLE 1.0	345	227364P4	HEXO MULTI SUSP. 2.0	191																					
146764Q2	RAY CEILING 1.0	147	204184W2	NOA 2.6	215	207264W9	BOX SUSP. 3.0	185	207564P9	DOCUS SUSP. 2.0	193	207864L9	RAY SUSP. 3.0	197	2203E8S0	ROCK SUSP. 3.0	233	2248E8B0	ROCK TABLE 1.0	345	227364P9	HEXO MULTI SUSP. 2.0	191																					
146764Q4	RAY CEILING 1.0	147	204284B2	NOA 3.5	215	207320B0	HEXO SUSP. 2.0	189	207564W2	DOCUS SUSP. 2.0	193	207864P2	RAY SUSP. 3.0	197	2203E8W0	ROCK SUSP. 3.0	233	2249E8B0	ROCK TABLE 1.0	345	227364Q2	HEXO MULTI SUSP. 2.0	191																					
146764Q9	RAY CEILING 1.0	147	204284W2	NOA 3.5	215	207320G0	HEXO SUSP. 2.0	189	207564W4	DOCUS SUSP. 2.0	193	207864P4	RAY SUSP. 3.0	197	2204E8D0	ROCK SUSP. 4.0	233	2250E8B0	ROCK TABLE 2.0	345	227364Q4	HEXO MULTI SUSP. 2.0	191																					
146764W2	RAY CEILING 1.0	147	204384B2	NOA 4.5	215	207320P0	HEXO SUSP. 2.0	189	207564W9	DOCUS SUSP. 2.0	193	207864P9	RAY SUSP. 3.0	197	2204E8S0	ROCK SUSP. 4.0	233	2251E8B0	ROCK TABLE 2.0	345	227364Q9	HEXO MULTI SUSP. 2.0	191																					
146764W4	RAY CEILING 1.0	147	204384W2	NOA 4.5	215	207320Q0	HEXO SUSP. 2.0	189	207620B0	DOCUS SUSP. 3.0	193	207864W2	RAY SUSP. 3.0	197	2204E8W0	ROCK SUSP. 4.0	233	2252E8B0	ROCK TABLE 2.0	345	227420B0	HEXO MULTI SUSP. 3.0	191																					
146764W9	RAY CEILING 1.0	147	2051E8G0	J.J.W. 03	157	207364B2	HEXO SUSP. 2.0	189	207620G0	DOCUS SUSP. 3.0	193	207864W4	RAY SUSP. 3.0	197	2205E8D0	ROCK SUSP. 3.0	233	227120B0	BOX MULTI SUSP. 2.0	187	227420G0	HEXO MULTI SUSP. 3.0	191																					
147173W4	CORY 0.9	63	2051E8S0	J.J.W. 03	157	207364B4	HEXO SUSP. 2.0	189	207620L0	DOCUS SUSP. 3.0	193	207864W9	RAY SUSP. 3.0	197	2205E8S0	ROCK SUSP. 3.0	233	227120L0	BOX MULTI SUSP. 2.0	187	227420P0	HEXO MULTI SUSP. 3.0	191																					
147373W4	CORY 1.6	63	2052E8G0	J.J.W. 04	217	207364B9	HEXO SUSP. 2.0	189	207620P0	DOCUS SUSP. 3.0	193	2092E0B0	WIRO 1.8	239	2205E8W0	ROCK SUSP. 3.0	233	227120P0	BOX MULTI SUSP. 2.0	187	227420Q0	HEXO MULTI SUSP. 3.0	191																					
148273W4	CORO 0.8	67	2052E8S0	J.J.W. 04	217	207364G2	HEXO SUSP. 2.0	189	207620W0	DOCUS SUSP. 3.0	193	2092E0V0	WIRO 1.8	239	2206E8D0	ROCK SUSP. 4.0	233	227120W0	BOX MULTI SUSP. 2.0	187	227464B2	HEXO MULTI SUSP. 3.0	191																					
148473W4	CORO 1.3	67	2053E8G0	J.J.W. 05	219	207364G4	HEXO SUSP. 2.0	189	207664B2	DOCUS SUSP. 3.0	193	2093E0B0	WIRO 3.8	239	2206E8S0	ROCK SUSP. 4.0	233	227164B2	BOX MULTI SUSP. 2.0	187	227464B4	HEXO MULTI SUSP. 3.0	191																					
149184B4	VENN 1.0	155	2053E8S0	J.J.W. 05	219	207364G9	HEXO SUSP. 2.0	189	207664B4	DOCUS SUSP. 3.0	193	2093E0V0	WIRO 3.8	239	2206E8W0	ROCK SUSP. 4.0	233	227164B4	BOX MULTI SUSP. 2.0	187	227464B9	HEXO MULTI SUSP. 3.0	191																					
149184W4	VENN 1.0	155	2054E8G0	J.J.W. 01	333	207364P2	HEXO SUSP. 2.0	189	207664B9	DOCUS SUSP. 3.0	193	2094E0B0	WIRO 6.1	241	2211E8D0	ROCK CEILING 1.0	159	227164B9	BOX MULTI SUSP. 2.0	187	227464G2	HEXO MULTI SUSP. 3.0	191																					
149284B4	VENN 2.0	155	2054E8S0	J.J.W. 01	333	207364P4	HEXO SUSP. 2.0	189	207664G2	DOCUS SUSP. 3.0	193	2094E0V0	WIRO 6.1	241	2211E8S0	ROCK CEILING 1.0	159	227164L2	BOX MULTI SUSP. 2.0	187	227464G4	HEXO MULTI SUSP. 3.0	191																					
149284W4	VENN 2.0	155	2055E8G0	J.J.W. 02	335	207364P9	HEXO SUSP. 2.0	189	207664G4	DOCUS SUSP. 3.0	193	2095E0B0	WIRO 6.5	245	2211E8W0	ROCK CEILING 1.0	159	227164L4	BOX MULTI SUSP. 2.0	187	227464G9	HEXO MULTI SUSP. 3.0	191																					
149384B4	VENN 3.0	227	2055E8S0	J.J.W. 02	335	207364Q2	HEXO SUSP. 2.0	189	207664G9	DOCUS SUSP. 3.0	193	2095E0V0	WIRO 6.5	245	2212E8D0	ROCK CEILING 2.0	159	227164L9	BOX MULTI SUSP. 2.0	187	227464P2	HEXO MULTI SUSP. 3.0	191																					
149384W4	VENN 3.0	227	2056E8G0	J.J.W. 042	317	207364Q4	HEXO SUSP. 2.0	189	207664L2	DOCUS SUSP. 3.0	193	2096E0B0	WIRO 2.0	237	2212E8S0	ROCK CEILING 2.0	159	227164P2	BOX MULTI SUSP. 2.0	187	227464P4	HEXO MULTI SUSP. 3.0	191																					
152110B0	DEEPER 1.0	25	2056E8S0	J.J.W. 042	217	207364Q9	HEXO SUSP. 2.0	189	207664L4	DOCUS SUSP. 3.0	193	2096E0V0	WIRO 2.0	237	2212E8W0	ROCK CEILING 2.0	159	227164P4	BOX MULTI SUSP. 2.0	187	227464P9	HEXO MULTI SUSP. 3.0	191																					
152110S0	DEEPER 1.0	25	206174W4	CORY SUSP. 6.6	221	207420B0	HEXO SUSP. 3.0	189	207664L9	DOCUS SUSP. 3.0	193	210163B1	CORK 1.0	209	2213E8D0	ROCK CEILING 1.0	159	227164P9	BOX MULTI SUSP. 2.0	187	227464Q2	HEXO MULTI SUSP. 3.0	191																					
152110W0	DEEPER 1.0	25	207120B0	BOX SUSP. 2.0	185	207420G0	HEXO SUSP. 3.0	189	207664P2	DOCUS SUSP. 3.0	193	210163B2	CORK 1.0	209	2213E8S0	ROCK CEILING 1.0	159	227164W2	BOX MULTI SUSP. 2.0	187	227464Q4	HEXO MULTI SUSP. 3.0	191																					
152120B0	DEEPER 1.0	25	207120L0	BOX SUSP. 2.0	185	207420P0	HEXO SUSP. 3.0	189	207664P4	DOCUS SUSP. 3.0	193	210163W1	CORK 1.0	209	2213E8W0	ROCK CEILING 1.0	159	227164W4	BOX MULTI SUSP. 2.0	187	227464Q9	HEXO MULTI SUSP. 3.0	191																					
152120S0	DEEPER 1.0	25	207120P0	BOX SUSP. 2.0	185	207420Q0	HEXO SUSP. 3.0	189	207664P9	DOCUS SUSP. 3.0	193	210163W2	CORK 1.0	209	2214E8D0	ROCK CEILING 2.0	159	227164W9	BOX MULTI SUSP. 2.0	187	227520B0	DOCUS MULTI SUSP. 2.0	195																					
152120W0	DEEPER 1.0	25	207120W0	BOX SUSP. 2.0	185	207464B2	HEXO SUSP. 3.0	189	207664W2	DOCUS SUSP. 3.0	193	210263B1	CORK 1.0 MULTI	213	2214E8S0	ROCK CEILING 2.0	159	227220B0	BOX MULTI SUSP. 3.0	187	227520G0	DOCUS MULTI SUSP. 2.0	195																					
152161B3	DEEPER 1.0	25	207164B2	BOX SUSP. 2.0	185	207464B4	HEXO SUSP. 3.0	189	207664W4	DOCUS SUSP. 3.0	193	210263B2	CORK 1.0 MULTI	213	2214E8W0	ROCK CEILING 2.0	159	227220L0	BOX MULTI SUSP. 3.0	187	227520L0	DOCUS MULTI SUSP. 2.0	195																					
152161B5	DEEPER 1.0	25	207164B4	BOX SUSP. 2.0	185	207464B9	HEXO SUSP. 3.0	189	207664W9	DOCUS SUSP. 3.0	193	210263W1	CORK 1.0 MULTI	213	2215E8D0	ROCK CEILING 1.0	159	227220P0	BOX MULTI SUSP. 3.0	187	227520P0	DOCUS MULTI SUSP. 2.0	195																					
152161B9	DEEPER 1.0	25	207164B9	BOX SUSP. 2.0	185	207464G2	HEXO SUSP. 3.0	189	207720B0	RAY SUSP. 2.0	197	210263W2	CORK 1.0 MULTI	213	2215E8S0	ROCK CEILING 1.0	159	227220W0	BOX MULTI SUSP. 3.0	187	227520W0	DOCUS MULTI SUSP. 2.0	195																					
152161S3	DEEPER 1.0	25	207164L2	BOX SUSP. 2.0	185	207464G4	HEXO SUSP. 3.0	189	207720L0	RAY SUSP. 2.0	197	211185W2	LOUIS 1.0	249	2215E8W0	ROCK CEILING 1.0	159	227264B2	BOX MULTI SUSP. 3.0	187	227564B2	DOCUS MULTI SUSP. 2.0	195																					
152161S5	DEEPER 1.0	25	207164L4	BOX SUSP. 2.0	185	207464G9	HEXO SUSP. 3.0	189	207720P0	RAY SUSP. 2.0	197	212185W4	MACBETH 1.0	251	2216E8D0	ROCK CEILING 2.0	159	227264B4	BOX MULTI SUSP. 3.0	187	227564B4	DOCUS MULTI SUSP. 2.0	195																					
152161S9	DEEPER 1.0	25	207164L9	BOX SUSP. 2.0	185	207464P2	HEXO SUSP. 3.0	189	207720W0	RAY SUSP. 2.0	197	212185W6	MACBETH 1.0	251	2216E8S0	ROCK CEILING 2.0	159	227264B9	BOX MULTI SUSP. 3.0	187	227564B9	DOCUS MULTI SUSP. 2.0	195																					
152161W3	DEEPER 1.0	25	207164P2	BOX SUSP. 2.0	185	207464P4	HEXO SUSP. 3.0	189	207764B2	RAY SUSP. 2.0	197	213185W4	GIGANT 10.0	253	2216E8W0	ROCK CEILING 2.0	159	227264L2	BOX MULTI SUSP. 3.0	187	227564G2	DOCUS MULTI SUSP. 2.0	195																					
152161W5	DEEPER 1.0	25	207164P4	BOX SUSP. 2.0	185	207464P9	HEXO SUSP. 3.0																																					

CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE	CODE	NAME	PAGE					
227564P4	DOCUS MULTI SUSP. 2.0	195	227864L4	RAY MULTI SUSP. 3.0	199	303271K4	THEMIS 1.7	267	311174B4	LEENS 1.0	297	321144Q1	BOX 2.0	315	322144B2	RAY 2.0	319	322244L4	RAY 3.0	319	710184I4	ATIM 1.0	367																				
227564P9	DOCUS MULTI SUSP. 2.0	195	227864L9	RAY MULTI SUSP. 3.0	199	303271S4	THEMIS 1.7	267	311174L4	LEENS 1.0	297	321144Q2	BOX 2.0	315	322144B4	RAY 2.0	319	322244P1	RAY 3.0	319	710284I4	ATIM CARRÉ 2.0	369																				
227564W2	DOCUS MULTI SUSP. 2.0	195	227864P2	RAY MULTI SUSP. 3.0	199	303271W4	THEMIS 1.7	267	311174W4	LEENS 1.0	297	321144Q4	BOX 2.0	315	322144G1	RAY 2.0	319	322244P2	RAY 1.6	319	711120B0	TUBE 1.0	373																				
227564W4	DOCUS MULTI SUSP. 2.0	195	227864P4	RAY MULTI SUSP. 3.0	199	303371K4	THEMIS 2.7	267	311274B4	LEENS 2.0	297	321144W1	BOX 2.0	315	322144G2	RAY 2.0	319	322244P4	RAY 3.0	319	711120D0	TUBE 1.0	373																				
227564W9	DOCUS MULTI SUSP. 2.0	195	227864P9	RAY MULTI SUSP. 3.0	199	303371S4	THEMIS 2.7	267	311274L4	LEENS 2.0	297	321144W2	BOX 2.0	315	322144G4	RAY 2.0	319	322244Q1	RAY 3.0	319	711120W0	TUBE 1.0	373																				
227620B0	DOCUS MULTI SUSP. 3.0	195	227864W2	RAY MULTI SUSP. 3.0	199	303371W4	THEMIS 2.7	267	311274W4	LEENS 2.0	297	321144W4	BOX 2.0	315	322144L1	RAY 2.0	319	322244Q2	RAY 3.0	319	711164D4	TUBE 1.0	373																				
227620G0	DOCUS MULTI SUSP. 3.0	195	227864W4	RAY MULTI SUSP. 3.0	199	303471K4	THEMIS CARRE 1.7	269	312164B4	INCH 1.5	301	321164B1	BOX 1.0	315	322144L2	RAY 2.0	319	322244Q4	RAY 3.0	319	711164W4	TUBE 1.0	373																				
227620L0	DOCUS MULTI SUSP. 3.0	195	227864W9	RAY MULTI SUSP. 3.0	199	303471S4	THEMIS CARRE 1.7	269	312164L4	INCH 1.5	301	321164B2	BOX 1.0	315	322144L4	RAY 2.0	319	322244W1	RAY 3.0	319	711220B0	TUBE 2.0	375																				
227620P0	DOCUS MULTI SUSP. 3.0	195	300120B0	BOX MINI 1.0	313	303471W4	THEMIS CARRE 1.7	269	312164W4	INCH 1.5	301	321164B4	BOX 1.0	315	322144P1	RAY 2.0	319	322244W2	RAY 3.0	319	711220D0	TUBE 2.0	375																				
227620W0	DOCUS MULTI SUSP. 3.0	195	300120L0	BOX MINI 1.0	313	303571K4	THEMIS CARRE 2.7	269	312264B4	INCH 2.6	301	321164G1	BOX 1.0	315	322144P2	RAY 2.0	319	322244W4	RAY 3.0	319	711220W0	TUBE 2.0	375																				
227664B2	DOCUS MULTI SUSP. 3.0	195	300120P0	BOX MINI 1.0	313	303571S4	THEMIS CARRE 2.7	269	312264L4	INCH 2.6	301	321164G2	BOX 1.0	315	322144P4	RAY 2.0	319	324173B4	WAHAA 1.0	305	711264D4	TUBE 2.0	375																				
227664B4	DOCUS MULTI SUSP. 3.0	195	300120W0	BOX MINI 1.0	313	303571W4	THEMIS CARRE 2.7	269	312264W4	INCH 2.6	301	321164G4	BOX 1.0	315	322144Q1	RAY 2.0	319	324173W4	WAHAA 1.0	305	711264W4	TUBE 2.0	375																				
227664B9	DOCUS MULTI SUSP. 3.0	195	300220B0	RAY MINI 1.0	317	303671S4	THEMIS 5.0	267	312364B4	INCH 5.4	301	321164L1	BOX 1.0	315	322144Q2	RAY 2.0	319	325163B4	ARZY 1.0	303	712120B0	TUBE CARRÉ 1.0	377																				
227664G2	DOCUS MULTI SUSP. 3.0	195	300220L0	RAY MINI 1.0	317	303671W4	THEMIS 5.0	267	312364L4	INCH 5.4	301	321164L2	BOX 1.0	315	322144Q4	RAY 2.0	319	325163C4	ARZY 1.0	303	712120D0	TUBE CARRÉ 1.0	377																				
227664G4	DOCUS MULTI SUSP. 3.0	195	300220P0	RAY MINI 1.0	317	304171S4	STRANGE CARRE 0.8	273	312364W4	INCH 5.4	301	321164L4	BOX 1.0	315	322144W1	RAY 2.0	319	325163W4	ARZY 1.0	303	712120W0	TUBE CARRÉ 1.0	377																				
227664G9	DOCUS MULTI SUSP. 3.0	195	300220W0	RAY MINI 1.0	317	304171W4	STRANGE CARRE 0.8	273	313174D4	CENTRAL 1.0	389	321164P1	BOX 1.0	315	322144W2	RAY 2.0	319	500184B4	ELLO SYSTEM 1.0	175	712220B0	TUBE CARRÉ 2.0	379																				
227664L2	DOCUS MULTI SUSP. 3.0	195	300320B0	DOCUS MINI 1.0	321	304271S4	STRANGE 1.7	271	313174L4	CENTRAL 1.0	389	321164P2	BOX 1.0	315	322144W4	RAY 2.0	319	500184W4	ELLO SYSTEM 1.0	175	712220D0	TUBE CARRÉ 2.0	379																				
227664L4	DOCUS MULTI SUSP. 3.0	195	300320G0	DOCUS MINI 1.0	321	304271W4	STRANGE 1.7	271	313174W4	CENTRAL 1.0	389	321164P4	BOX 1.0	315	322164B1	RAY 1.0	319	500284B4	ELLO SUSP. 13.0	247	712220W0	TUBE CARRÉ 2.0	379																				
227664L9	DOCUS MULTI SUSP. 3.0	195	300320L0	DOCUS MINI 1.0	321	304371S4	STRANGE 2.7	271	313274D4	CENTRAL 2.0	389	321164Q1	BOX 1.0	315	322164B2	RAY 1.0	319	500284W4	ELLO SUSP. 13.0	247	712320B0	TUBE CARRÉ 3.0	381																				
227664P2	DOCUS MULTI SUSP. 3.0	195	300320P0	DOCUS MINI 1.0	321	304371W4	STRANGE 2.7	271	313274L4	CENTRAL 2.0	389	321164Q2	BOX 1.0	315	322164B4	RAY 1.0	319	700254D4	X-BEAM 2.0	415	712320D0	TUBE CARRÉ 3.0	381																				
227664P4	DOCUS MULTI SUSP. 3.0	195	300320W0	DOCUS MINI 1.0	321	304471S4	STRANGE CARRE 1.7	273	313274W4	CENTRAL 2.0	389	321164Q4	BOX 1.0	315	322164G1	RAY 1.0	319	700264D4	X-BEAM 1.0	415	712320W0	TUBE CARRÉ 3.0	381																				
227664P9	DOCUS MULTI SUSP. 3.0	195	300420B0	HEXO MINI 1.0	323	304471W4	STRANGE CARRE 1.7	273	314174D4	STATION 1.0	391	321164W1	BOX 1.0	315	322164G2	RAY 1.0	319	701183S4	ROB 1.6	161	7131V0I0	STAR 1.0	383																				
227664W2	DOCUS MULTI SUSP. 3.0	195	300420G0	HEXO MINI 1.0	323	304571S4	STRANGE CARRE 2.7	273	314174L4	STATION 1.0	391	321164W2	BOX 1.0	315	322164G4	RAY 1.0	319	701183W4	ROB 1.6	161	714144B4	BOX 2.0	403																				
227664W4	DOCUS MULTI SUSP. 3.0	195	300420P0	HEXO MINI 1.0	323	304571W4	STRANGE CARRE 2.7	273	314174W4	STATION 1.0	391	321164W4	BOX 1.0	315	322164L1	RAY 1.0	319	701283S4	ROB 2.6	161	714144D4	BOX 2.0	403																				
227664W9	DOCUS MULTI SUSP. 3.0	195	300420Q0	HEXO MINI 1.0	323	304671S4	STRANGE 5.0	271	314274D4	STATION 2.0	391	3211G0B0	BOX 1.0	315	322164L2	RAY 1.0	319	701283W4	ROB 2.6	161	714144W4	BOX 2.0	403																				
227720B0	RAY MULTI SUSP. 2.0	199	301120B0	BOX MINI 2.0	313	304671W4	STRANGE 5.0	271	314274L4	STATION 2.0	391	3211G0G0	BOX 1.0	315	322164L4	RAY 1.0	319	701383S4	ROB 3.5	161	714164B4	BOX 1.0	403																				
227720L0	RAY MULTI SUSP. 2.0	199	301120L0	BOX MINI 2.0	313	305151B4	STRIPE 0.4	275	314274W4	STATION 2.0	391	3211G0L0	BOX 1.0	315	322164P1	RAY 1.0	319	701383W4	ROB 3.5	161	714164D4	BOX 1.0	403																				
227720P0	RAY MULTI SUSP. 2.0	199	301120P0	BOX MINI 2.0	313	305151L4	STRIPE 0.4	275	315174L4	METRO 1.0	293	3211G0P0	BOX 1.0	315	322164P2	RAY 1.0	319	702151D4	SMILE IN 1.0	363	714164W4	BOX 1.0	403																				
227720W0	RAY MULTI SUSP. 2.0	199	301120W0	BOX MINI 2.0	313	305151W4	STRIPE 0.4	275	315174W4	METRO 1.0	293	3211G0Q0	BOX 1.0	315	322164P4	RAY 1.0	319	702253D4	SMILE ON 1.0	371	714244B4	BOX 4.0	403																				
227764B2	RAY MULTI SUSP. 2.0	199	301220B0	RAY MINI 2.0	317	305251B4	STRIPE 0.7	275	317274B4	MILES 9.0	327	3211G0W0	BOX 1.0	315	322164Q1	RAY 1.0	319	702253L4	SMILE ON 1.0	281	714244D4	BOX 4.0	403																				
227764B4	RAY MULTI SUSP. 2.0	199	301220L0	RAY MINI 2.0	317	305251L4	STRIPE 0.7	275	317274L4	MILES 9.0	327	321244B1	BOX 3.0	315	322164Q2	RAY 1.0	319	702253W4	SMILE ON 1.0	281	714244W4	BOX 4.0	403																				
227764B9	RAY MULTI SUSP. 2.0	199	301220P0	RAY MINI 2.0	317	305251W4	STRIPE 0.7	275	317274W4	MILES 9.0	327	321244B2	BOX 3.0	315	322164Q4	RAY 1.0	319	703151D4	SMILE IN 2.0	363	714264B4	BOX 3.0	403																				
227764L2	RAY MULTI SUSP. 2.0	199	301220W0	RAY MINI 2.0	317	305351B4	STRIPE 2.2	275	317374B4	MILES 12.0	327	321244B4	BOX 3.0	315	322164W1	RAY 1.0	319	703253D4	SMILE ON 2.0	371	714264D4	BOX 3.0	403																				
227764L4	RAY MULTI SUSP. 2.0	199	301320B0	DOCUS MINI 2.0	321	305351L4	STRIPE 2.2	275	317374L4	MILES 12.0	327	321244G1	BOX 3.0	315	322164W2	RAY 1.0	319	703253L4	SMILE ON 2.0	281	714264W4	BOX 3.0	403																				
227764L9	RAY MULTI SUSP. 2.0	199	301320G0	DOCUS MINI 2.0	321	305351W4	STRIPE 2.2	275	317374W4	MILES 12.0	327	321244G2	BOX 3.0	315	322164W4	RAY 1.0	319	703253W4	SMILE ON 2.0	281	715144B4	RAY 2.0	407																				
227764P2	RAY MULTI SUSP. 2.0	199	301320L0	DOCUS MINI 2.0	321	3071V0C0	LIGHTDROP 1.2	285	3181T3S0	YARD 10.0	329	321244G4	BOX 3.0	315	3221G0B0	RAY 1.0	319	703354D4	SMILE 1.0	387	715144D4	RAY 2.0	407																				

CODE	NAME	PAGE	CODE	NAME	PAGE
716274W4	<b>PALOS 2.0</b>	<b>413</b>	729153D4	<b>ALICE 1.0</b>	<b>461</b>
716374D4	<b>PALOS 1.0</b>	<b>433</b>	729253D4	<b>ALICE 2.0</b>	<b>461</b>
716474D4	<b>PALOS 2.0</b>	<b>435</b>	730144B4	<b>BOXX 1.0</b>	<b>409</b>
717374D4	<b>GETTON 2.0</b>	<b>385</b>	730144D4	<b>BOXX 1.0</b>	<b>409</b>
717374W4	<b>GETTON 2.0</b>	<b>385</b>	730144W4	<b>BOXX 1.0</b>	<b>409</b>
717474D4	<b>GETTON 1.0</b>	<b>385</b>	733168D4	<b>INTRA - 1.0 ROUND</b>	<b>351</b>
717474W4	<b>GETTON 1.0</b>	<b>385</b>	733168I4	<b>INTRA - 1.0 ROUND</b>	<b>351</b>
717574D4	<b>GETTON 1.0</b>	<b>445</b>	733168W4	<b>INTRA - 1.0 ROUND</b>	<b>351</b>
717674D4	<b>GETTON 2.0</b>	<b>445</b>	750161I4	<b>CARD 0.1</b>	<b>417</b>
719143D4	<b>TRAIN NARROW 1.0</b>	<b>399</b>	750261I4	<b>CARD 0.2</b>	<b>417</b>
719163D4	<b>TRAIN 1.0</b>	<b>395</b>	750361I4	<b>CARD 0.3</b>	<b>417</b>
719163L4	<b>TRAIN 1.0</b>	<b>311</b>	751163I4	<b>MAP 0.6</b>	<b>419</b>
719163W4	<b>TRAIN 1.0</b>	<b>395</b>	751264I4	<b>MAP 0.9</b>	<b>419</b>
719243D4	<b>TRAIN NARROW 2.0</b>	<b>399</b>	751354I4	<b>MAP 1.2</b>	<b>419</b>
719253D4	<b>TRAIN NARROW 2.0</b>	<b>399</b>	751364I4	<b>MAP 1.2</b>	<b>419</b>
719263D4	<b>TRAIN 2.0</b>	<b>395</b>	752163I4	<b>CHART 0.6</b>	<b>423</b>
719263L4	<b>TRAIN 2.0</b>	<b>311</b>	752264I4	<b>CHART 0.9</b>	<b>423</b>
719263W4	<b>TRAIN 2.0</b>	<b>395</b>	752354I4	<b>CHART 1.2</b>	<b>423</b>
720174D4	<b>SWAY 1.0</b>	<b>431</b>	752364I4	<b>CHART 1.2</b>	<b>423</b>
720274D4	<b>SWAY 2.0</b>	<b>431</b>	753164I4	<b>FLIP 1.2</b>	<b>421</b>
721174D4	<b>EDGE 2.0</b>	<b>437</b>	753254I4	<b>FLIP 1.6</b>	<b>421</b>
721274D4	<b>EDGE 4.0</b>	<b>437</b>	753264I4	<b>FLIP 1.6</b>	<b>421</b>
721374D4	<b>EDGE 8.0</b>	<b>437</b>	754164I4	<b>CHIP 1.2</b>	<b>425</b>
722174D4	<b>TAPE 1.0</b>	<b>401</b>	754254I4	<b>CHIP 1.6</b>	<b>425</b>
722174W4	<b>TAPE 1.0</b>	<b>401</b>	754264I4	<b>CHIP 1.6</b>	<b>425</b>
722274D4	<b>TAPE 4.0</b>	<b>439</b>	756174D4	<b>FIFTY FIFTY 1.0</b>	<b>427</b>
722274W4	<b>TAPE 4.0</b>	<b>439</b>	756274D4	<b>FIFTY FIFTY 2.0</b>	<b>427</b>
722374D4	<b>TAPE 6.0</b>	<b>439</b>			
722374W4	<b>TAPE 6.0</b>	<b>439</b>			
722474D4	<b>TAPE 8.0</b>	<b>439</b>			
722474W4	<b>TAPE 8.0</b>	<b>439</b>			
723174D4	<b>PACE 4.0</b>	<b>441</b>			
723174W4	<b>PACE 4.0</b>	<b>441</b>			
723274D4	<b>PACE 6.0</b>	<b>441</b>			
723274W4	<b>PACE 6.0</b>	<b>441</b>			
723374D4	<b>PACE 8.0</b>	<b>441</b>			
723374W4	<b>PACE 8.0</b>	<b>441</b>			
724174D4	<b>PALLUZ O 1.0</b>	<b>447</b>			
724274D4	<b>PALLUZ O 2.0</b>	<b>447</b>			
724374D4	<b>PALLUZ C 1.0</b>	<b>449</b>			
724474D4	<b>PALLUZ C 2.0</b>	<b>449</b>			
7251T7B0	<b>POLAR 1.0</b>	<b>451</b>			
7251T7T0	<b>POLAR 1.0</b>	<b>451</b>			
7251T7W0	<b>POLAR 1.0</b>	<b>451</b>			
727174D4	<b>STAKE 1.0</b>	<b>453</b>			
727274D4	<b>STAKE FOLD 1.0</b>	<b>455</b>			
727374D4	<b>STAKE 2.0</b>	<b>453</b>			
728183D4	<b>J.M. 1.0</b>	<b>459</b>			
728283D4	<b>J.M. 2.0</b>	<b>459</b>			


# UP YOUR LIFE



**A**  
Aluminium  
anodised



**B**  
Black  
texture



**B**  
Simple  
black




**C**  
Chrome




**D**  
Dark grey  
texture



**D**  
Multi  
Colour



**E**  
White texture +  
Black



**F**  
Aluminium brushed +  
Black




**G**  
Gold



**H**  
White  
glossy



**I**  
Inox



**J**  
White texture +  
Gold



**K**  
Black texture +  
Gold



**L**  
Aluminium  
brushed



**M**  
Matt  
chrome



**N**  
Black  
glossy



**P**  
Copper



**Q**  
Bronze




**T**  
Grey  
texture



**S**  
Silver /  
Grey




**S**  
Silver  
Shine



**U**  
Black texture +  
Chrome



**V**  
Rust



**W**  
White  
texture



**W**  
Autumn  
White

# ICONS

ICON	ENGLISH	GERMAN	FLEMISH	FRENCH	SPANISH	ITALIAN	RUSSIAN
	Cutout Round	Ausschnitt rund	Ronde Inbouwopening	Découpe ronde	Corte circular	Taglio tondo	Вырез круглый
	Cutout Square	Ausschnitt Eckig	Rechthoekige Inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro	Вырез квадратный
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso	Установочная глубина
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore	Толщина
	Turn Vertical	Vertikal drehbar	verticaal richtbaar	Orientable vertical	Orientable en vertical	Orientabile in verticale	Наклонный по вертикали
	Turn Horizontal	Horizontal drehbar	horizontaal richtbaar	Orientable horizontal	Orientable en horizontal	Orientabile in orizzontale	Поворотный по горизонтали
	Beam Angle	Abstrahlwinkel	reflectorhoek	Faisceau	Ángulo de apertura	Angolo di apertura (del fascio)	Угол рассеивания
	Class 1 Fixture	Leuchte der Klasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1	Класс защиты светильника 1
	Class 2 Fixture	Leuchte der Klasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2	Класс защиты светильника 2
	Class 3 Fixture	Leuchte der Klasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3	Класс защиты светильника 3
	Safety Distance	Sicherheitsabstand	Veiligheidsafstand	Distance de sécurité	Distancia de seguridad	Distanza di sicurezza	Безопасное расстояние
	Glowtest 960	Glühdrahtprüfung 960	Gloeidraadtest 960	Test au fil incandescent	Prueba de hilo 960	Resistenza alla temperatura 960°	Тестирование на нагрев 960
	IP Rated	Schutzklasse	IP rating	Indice de protection	Grado IP	Grado di protezione IP	Класс защиты IP
	Polycarbonate	Polykarbonat	Polycarbonaat	Polycarbonate, plexi	Policarbonato	Policarbonato	Поликарбонат
	Protection Glass	Sicherheitsglas	Beschermglas	Verre de protection	Vidrio de protección	Protetto con vetro	Защитное стекло
	Tempered Glass	Temperiertes Glas	Getemperd beschermglas	Verre de protection température sur verre	Cristal atemperado	Vetro temperato	Закалённое стекло
	Fixation Ceiling	Deckenmontage	Plafondbevestiging	Montage au plafond	Montaje en techo	Montaggio a soffitto	Потолочное крепление
	Fixation Wall	Wandmontage	Wandbevestiging	Montage au mur	Montaje en pared	Montaggio a parete	Настенное крепление
	Fixation Floor	Bodenmontage	Vloerbevestiging	Montage au sol	Montaje en suelo	Montaggio a pavimento	Напольное крепление
	Up/Down Light	aufwärts/abwärts strahlend	Verlichting up of down	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto	Освещение вверх или вниз
	Side Light	seitlich abstrahlend	Verlichting lateraal	Éclairage laterale	Emisión lateral	Luce laterale	Освещение в сторону
	Up and Down Light	direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce monoemissione sopra e sotto	Освещение вверх и вниз
	Surround Light	allseitig abstrahlend	Sfeerverlichting	Éclairage multidirections	Emisión perimetral	Luce diffusa	Освещение вокруг
	CE/VDE/ENEC Certificate	CE Zertifikat	CE Certificaat	Certificat CE	Certificado CE	Certificato CE	Сертификат CE

HELLO, CAN YOU HEAR ME.

# CONTACT

## HEAD OFFICE

### WEVER & DUCRÉ BVBA

Kwadestraat 153 – Bus 2.1  
8800 Roeselare, Belgium  
Phone +32 51 622 650  
Fax+32 51 622 695  
office@weverducre.com  
www.weverducre.com

### WEVER & DUCRÉ AUSTRIA

showroom.at@weverducre.com

### WEVER & DUCRÉ FRANCE

info.fr@weverducre.com

### WEVER & DUCRÉ IBERIA

info.es@weverducre.com

### WEVER & DUCRÉ ITALY

info.it@weverducre.com

### WEVER & DUCRÉ NETHERLANDS

info.nl@weverducre.com

### WEVER & DUCRÉ POLAND

info.pl@weverducre.com

### WEVER & DUCRÉ RUSSIA

info.ru@weverducre.com

### WEVER & DUCRÉ SWEDEN

office.se@weverducre.com

### WEVER & DUCRÉ UK

info.uk@weverducre.com

## REPRESENTATIVE OFFICES

### WEVER & DUCRÉ ASIA PACIFIC LTD.

RM. 1413, Block A, Sea View Estate  
2 Watson Road North Point  
Hong Kong  
Phone +852 2110 6924  
Fax +852 3106 4096  
office.hk@weverducre.com  
office.cn@weverducre.com

### WEVER & DUCRÉ DEUTSCHLAND GMBH

Schanzenstraße 36, Geb. 234B  
51063 Cologne  
Germany  
Phone +49 221 13 06 496 0  
Fax +49 221 13 06 496 9  
office.de@weverducre.com

### WEVER & DUCRÉ SCHWEIZ GMBH

Rodteggstraße 22  
6005 Luzern  
Switzerland  
Phone +41 79 443 74 55  
Fax +41 44 245 80 99  
office.ch@weverducre.com

### WEVER & DUCRÉ USA

133 West 19th Street, 9th Floor  
New York, NY 10011  
United States of America  
Phone +1 212 343 8100  
office.us@weverducre.com

# 1st edition, March 2016, ©Wever & Ducré® bvba.

All prices excluding VAT. They are non-binding recommended prices, lamps (bulbs) are not included. The prices and terms of payment stated in the order confirmation shall apply. To all prices and all extra expenses, the seller adds the legally applicable value added taxes. Should the seller's costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. Prices, terms and dates of delivery stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Alteration or modifications according to misprints and/or typing and printing errors remain reserved. Prices are valid till the publication of a new price list. We reserve the right to make changes in price, measurements and design. Any liability for misprints excluded. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product. We reserve the right to make alterations to our products at any time. The general terms and conditions of Wever & Ducré bvba shall apply to all purchases and orders. The relevant version of the general terms and conditions can be viewed at [www.weverducre.com/en/Downloads](http://www.weverducre.com/en/Downloads).

Corian® is a registered trademark of DuPont™

#### COVER

KNARF, Miami (Wall Artist)

#### ART DIRECTION

Albert Exergian

#### GRAPHIC DESIGN

Carina Erlach, Lisa Hauser

#### PRINT PRODUCTION

Rene Zavadičnik

#### ILLUSTRATION

Lukas Hochenwarter

#### TEXT

Tanja Petschnig

#### LITHOGRAPHY

Volker Waldhauser

#### GENERAL COORDINATION

Helena Bäuchler

#### PRINTING

Drukarnia Perfekt S.A., Warsaw, Poland

#### PHOTOGRAPHY

Anda Manu Photography (p. 136), Croce & Wir (p. 174), Kris Dekeijser (p. 5 | 12-14 | 16-17 | 22 | 24 | 26-28 | 30-31 | 34 | 38 | 42 | 46 | 54 | 60 | 62 | 82 | 94 | 102 | 104 | 108 | 110-112 | 114 | 116 | 128 | 130 | 146 | 154 | 162 | 166-167 | 170-173 | 184 | 190 | 196 | 198 | 200 | 208 | 210-211 | 212 | 216 | 218 | 226 | 230-231 | 236 | 240 | 244 | 248 | 256-257 | 260 | 262 | 278 | 282 | 290 | 292 | 294 | 298 | 308-309 | 310 | 314 | 316 | 318 | 324 | 350 | 386 | 406 | 428 | 454), Justine Szczepanczyk (p. 66), Egon Gade (p. 86 | 144-145 | 164 | 276-277), Csongor Molnar (p. 224), Paul Ott (p. 11 | 158 | 160 | 232 | 234-235 | 296 | 330 | 338 | 342 | 344 | 352 | 354-355 | 372 | 384 | 390 | 392-393 | 394 | 402 | 404-405 | 408 | 424 | 430 | 436 | 452 | 456), Lena Fingerle (p. 132-133), Citronenrot (p. 252), Artion Istuganov (p. 374), Leonas Garbaciauskas (p. 422), Gerald Van Rafelghem (p. 32 | 36 | 44 | 74 | 90 | 150 | 168 | 182 | 274 | 332 | 416 | 418 | 438), Christoph Steinbauer (p. 152 | 228 | 238 | 258 | 300 | 306 | 332 | 340-341 | 358 | 364 | 400), Jiří Dymáček (p. 396-397), Studio Augenblick (p. 334 | 336-337), Dizzart Studio (p.142), Kurt Kuball (p. 440), Sampsa Pärnänen (p. 148-149), Diana Larrea (p. 6-7)

**THIS  
IS NOT  
THE  
END**

Pay a visit to [weverducre.com](http://weverducre.com)

[weverducre.com](http://weverducre.com)

